

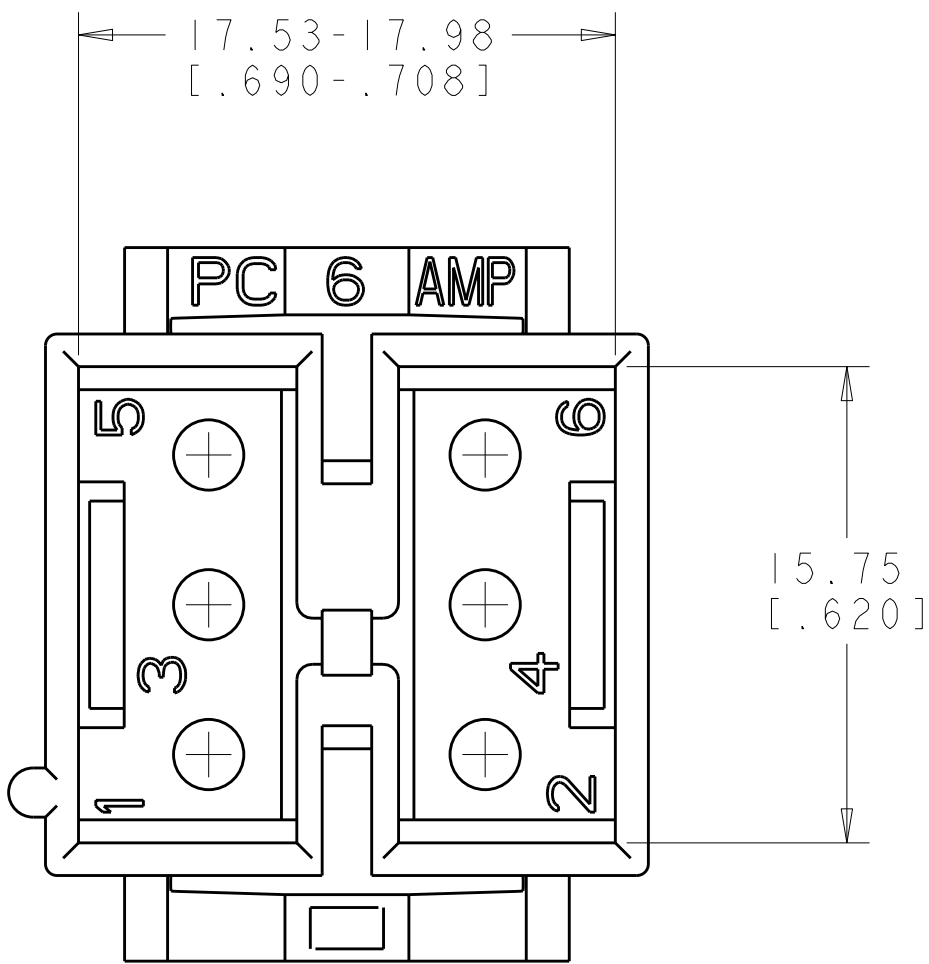
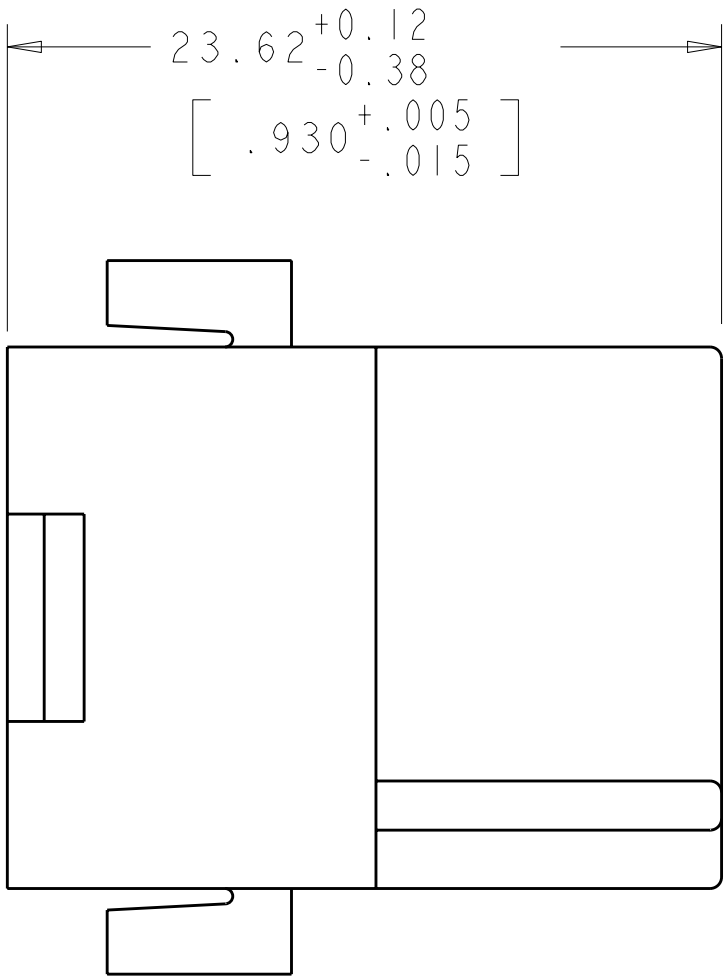
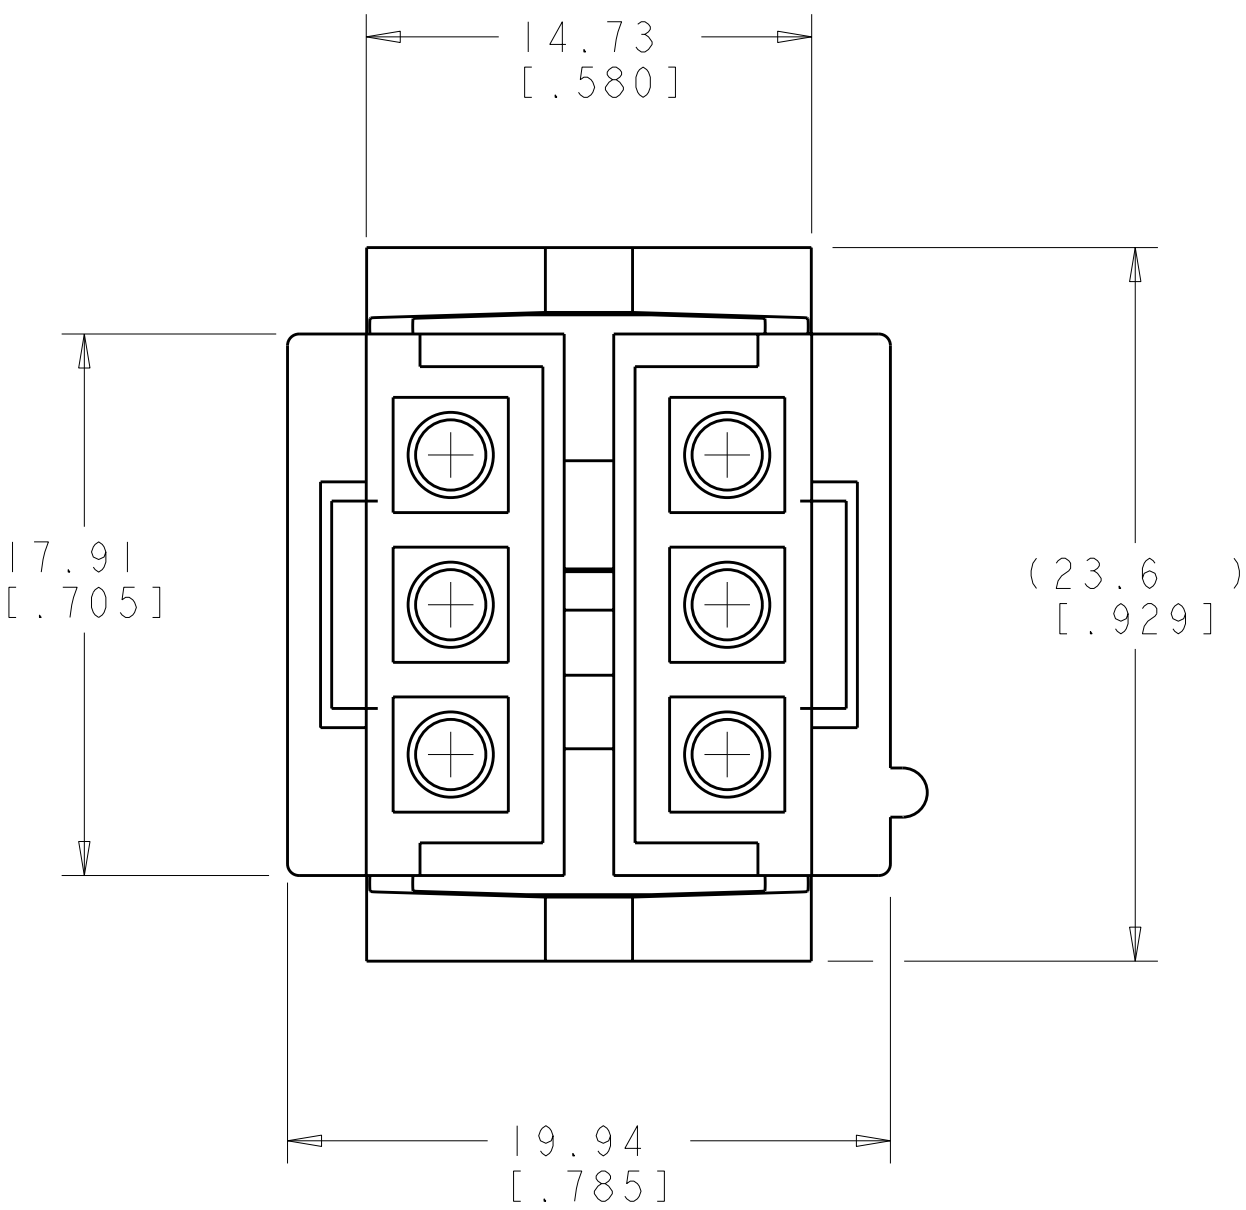
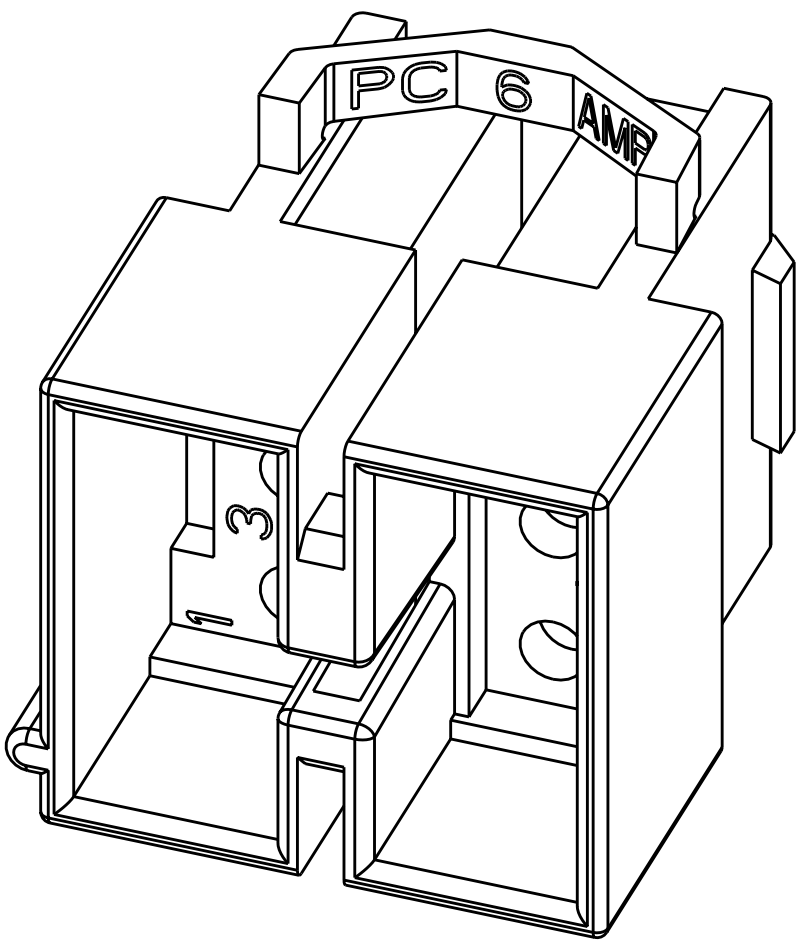
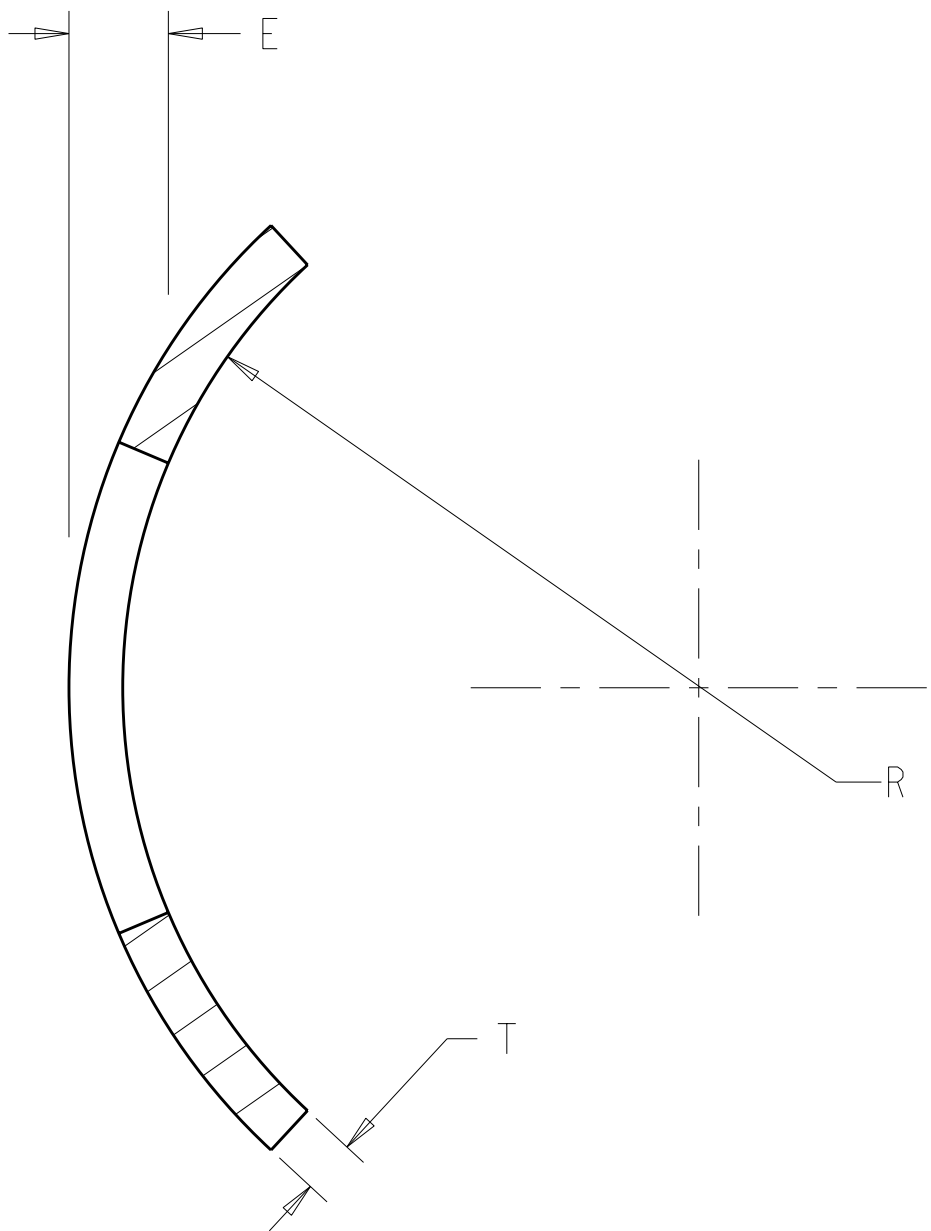


LOC		DIST		REVISIONS						
CM	00	P	LTR	DESCRIPTION			DATE	DWN	APVD	
		AE		ECO-07-026122			05NOV2007	KW	CC	
		AF		ECO-07-028172			28NOV2007	KW	CC	

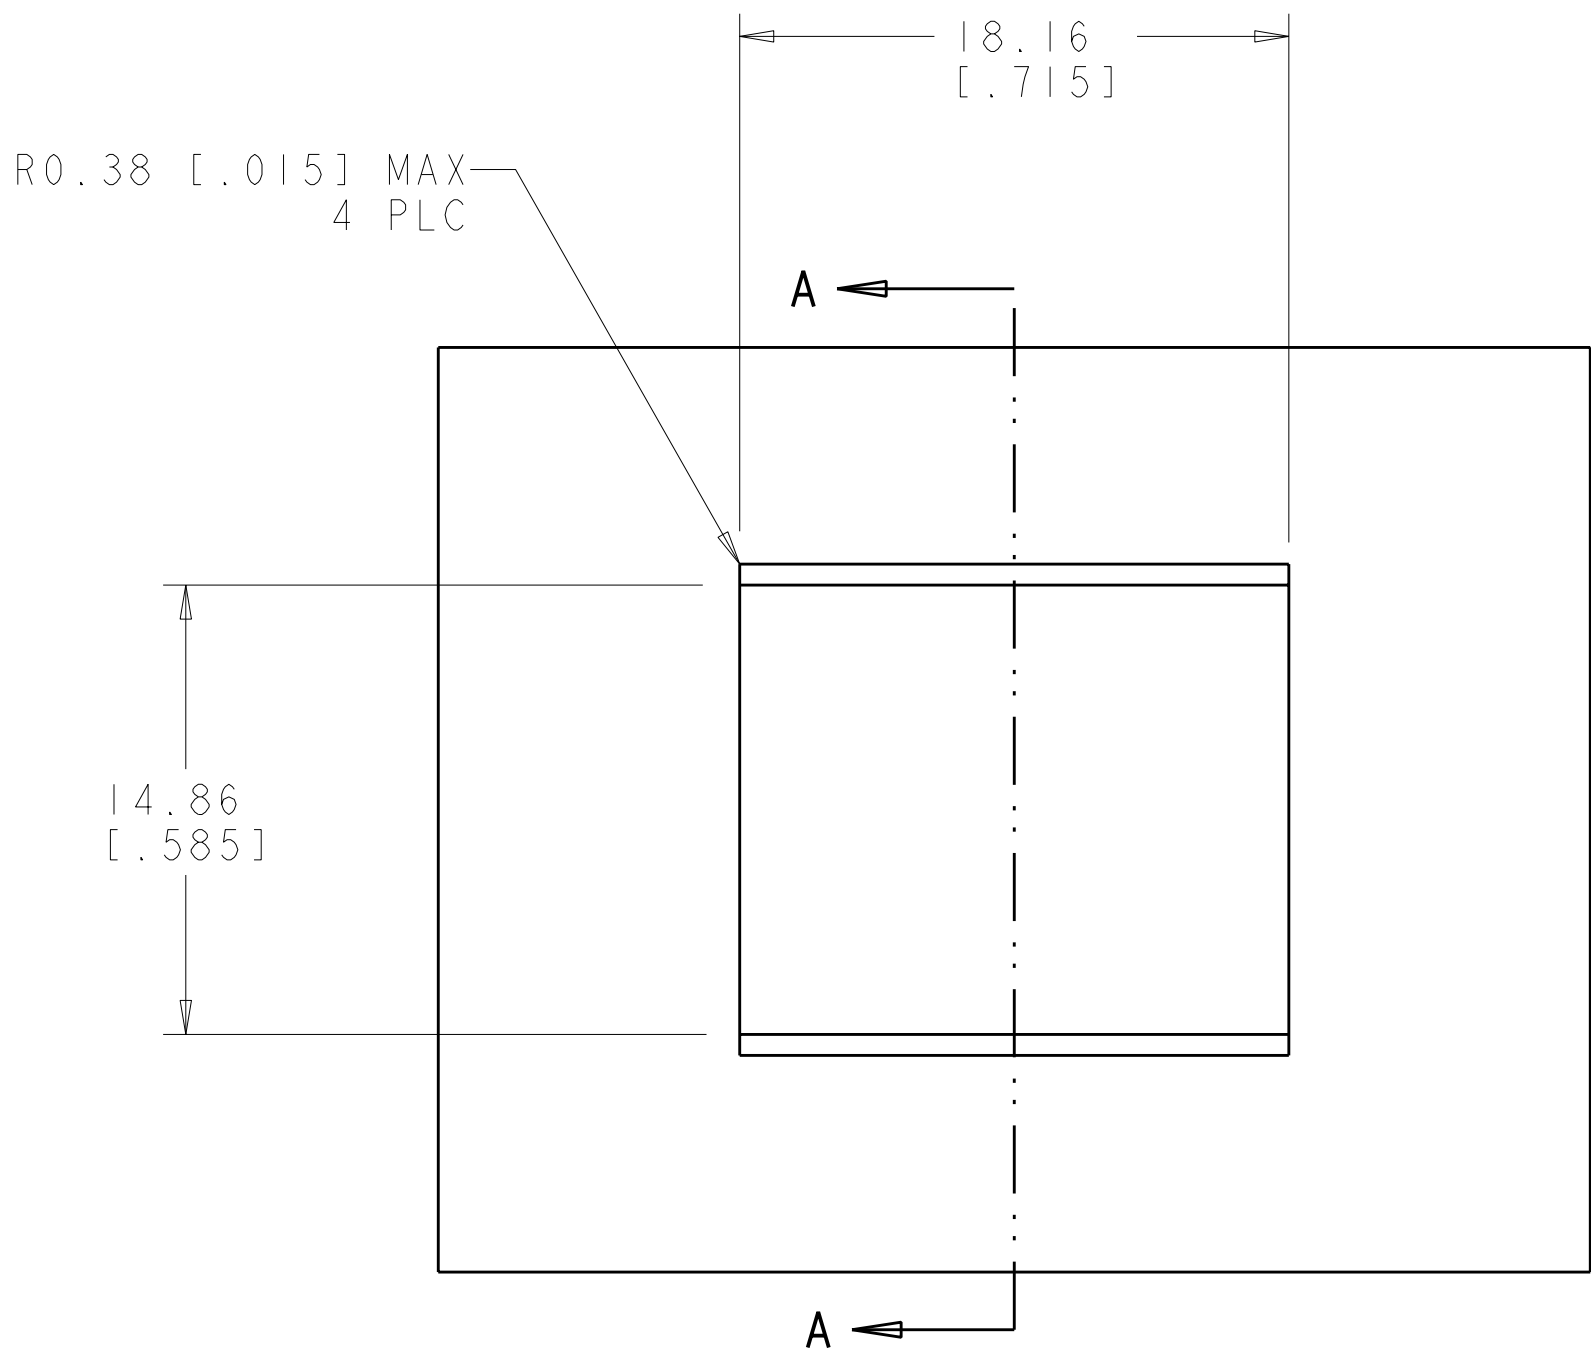

1. TO BE USED WITH COMMERCIAL MATE-N-LOK™ PINS.
2. TO BE USED WITH PLUG 480270.
3. RECOMMENDED PANEL THICKNESS "E" IS 1.02-2.54 [.040-.100] AND IS DEPENDENT ON "T" AND "R".
4. HOUSING MUST BE INSERTED IN A ROCKING MANNER.
5. THE PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
6. MOTOR MOUNT HOUSINGS MAY BE USED IN FLAT PANELS.

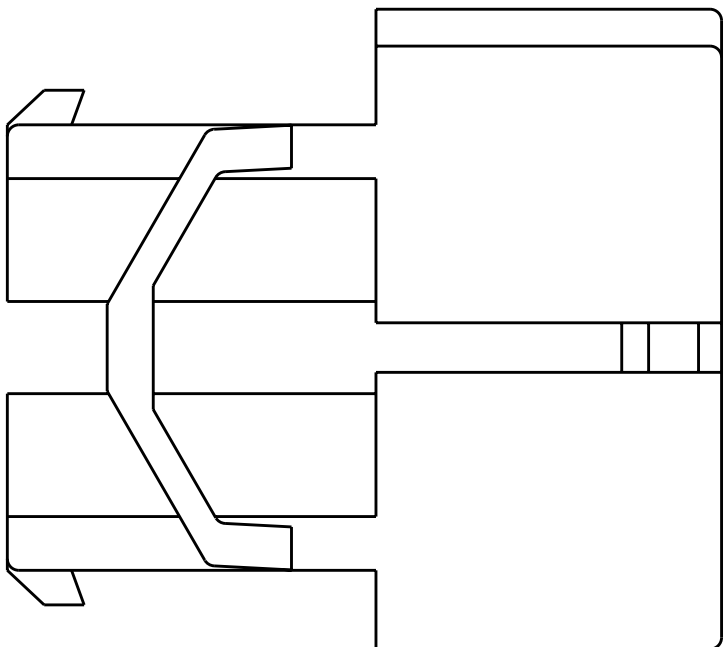

RECOMMENDED CUT OUT

METRIC

0.192 IN ³	I-480271-0
VOLUME	PART NUMBER

1111 E. MARKET STREET, SUITE 100, HARRISBURG, PA 17105-3608 TEL: 717-631-1000 FAX: 717-631-1001 WWW.TYCOELECTRONICS.COM		DWN R. WHITAKER 01NOV2007	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK C. CASH 01NOV2007	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. CASH 01NOV2007	CAP.	
9 PLC ±		6 CIRCUIT, MOTOR MOUNT,		
1 PLC ±		COMMERCIAL MATE-N-LOK(TM)		
2 PLC ±0.13 [.005]		APPLICATION SPEC		
3 PLC ±		SIZE		
4 PLC ±		CASE CODE		
5 PLC ±		DRAWING NO		
6 PLC ±		RESTRICTED TO		
7 PLC ±		A 00779 C 480271		
8 PLC ±		WEIGHT		
9 ANGLES ±		CUSTOMER DRAWING		
10 FINISH		SCALE		
11		4:1		
12		SHEET		
13		1		
14		OF		
15		REV		
16		A		
MATERIAL NYLON UL 94V-2 NATURAL				