

Product datasheet

Specifications



Harmony XVM, Illuminated unit for modular tower lights, plastic, red, Ø45, for bulb BA 15d, <= 230 V AC/DC

Local distributor code:

398334103

XVMC34

EAN Code: 3389119004251

Main

Range of product	Harmony XVM
Product or component type	Indicator bank
Beacon or indicator bank unit type	Illuminated unit
Component name	XVM
Light source	Bulb not included, red
Bulb type	Incandescent with BA 15d base Super bright LED Flash discharge tube
[Us] rated supply voltage	<= 230 V AC/DC

Complementary

Mounting diameter	45 mm
Assembly style	Customer assembly
Maximum power dissipation in W	5 W
Connections - terminals	Screw terminals, 1 x 0.325...1 x 1.5 mm ²
Marking	CE
[UI] rated insulation voltage	250 V conforming to IEC 60947-1
Nominal voltage limit	0.85...1.1 Un conforming to IEC 60947-5-1
[Uimp] rated impulse withstand voltage	4 kV conforming to IEC 60947-1
Luminance	650 cd/m ²
CAD overall width	47 mm
CAD overall height	65 mm
CAD overall depth	47 mm
Net weight	0.04 kg

Environment

Product certifications	CCC
Standards	IEC 60947-1 IEC 60947-5-1
Ambient air temperature for storage	-25...70 °C
Ambient air temperature for operation	-10...50 °C
IP degree of protection	IP40 any position except vertical position conforming to IEC 60529 IP42 vertical position conforming to IEC 60529

Electrical shock protection class	Class I aluminium tube mounting conforming to IEC 60947-1 Class I aluminium tube mounting conforming to IEC 60947-5-1 Class I aluminium tube mounting conforming to IEC 61140 Class II base mounting conforming to IEC 60947-1 Class II base mounting conforming to IEC 60947-5-1 Class II base mounting conforming to IEC 61140
--	---

Protective treatment	TC
-----------------------------	----

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.100 cm
Package 1 Width	7.200 cm
Package 1 Length	12.900 cm
Package 1 Weight	45.000 g
Unit Type of Package 2	S01
Number of Units in Package 2	25
Package 2 Height	15.000 cm
Package 2 Width	15.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	1.436 kg

Logistical informations

Country of origin	ID
--------------------------	----

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint 51

Environmental Disclosure [Product Environmental Profile](#)

Use Better



Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number 6797f094-b2bf-48a4-981a-58794615fad0

Use Longer



Lifetime extension

Repair No

Use Again



Repack and remanufacture

End of life manual availability No need of specific recycling operations


Take-back No

Dimensions Drawings

Customer Assembled Tower Light

Dimensions

Below drawing shows a tower light with 3 illuminated stages. Select the number of stages according to the product characteristics in order to get **b** dimension.

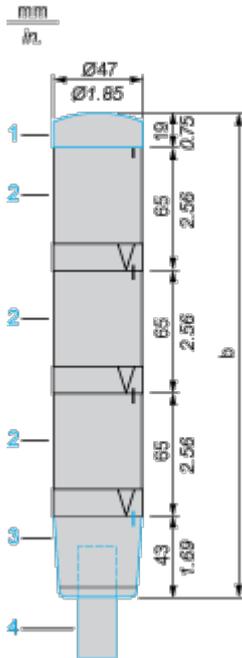


- (1) Cover (included with base unit XVMC21/C29•)
- (2) Illuminated unit
- (3) Base unit XVMC21 (without buzzer) or XVMC29• (with buzzer), to be ordered separately
- (4) Fixing base XVMZ0•/Z0•T, to be ordered separately

Number of illuminated units (ref. 2)	b in mm	b in in.
1	127	5.00
2	192	7.56
3	257	10.12
4	322	12.68
5	387	15.24

Technical Illustration

Dimensions

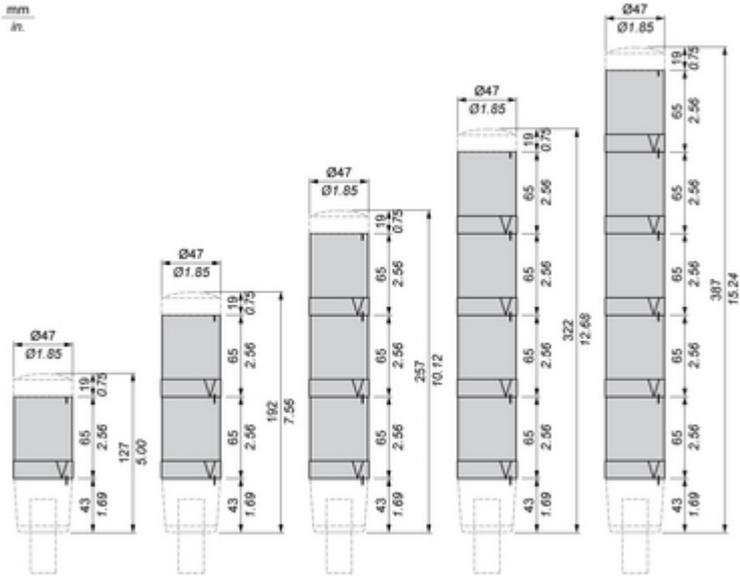

Offer Marketing Illustration

Product benefits / Features

Features Harmony XVM



-  Signaling for medium distances
-  Available in complete or separate units for customer assembly
-  Three types of mounting adapted to your needs: direct plastic fixing plate, support tube with metal bracket or with plastic fixing plate
-  Composition of 1, 2, 3 & 4 illuminated units, with or without buzzer, with fixing system for horizontal or vertical mounting

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XVM

Compact 45mm diameter with enough features to cover most of the applications



These illuminated units incorporate base that can be fitted with an incandescent bulb, a "Super Bright" LED, or a "flash" discharge tube.



Modular for easy customized and monolithic with pre-assembled and pre-wired ease the installation and selection effort



Adjustable Buzzer unit(85dB) integrated in the based unit, 2 types of selection sound and volume



Image of product / Alternate images

Alternative

