

# Wiha torque screwdrivers.

## TorqueVario®-S with scale.



with scale, incl. Torque-Setter

**2852** TorqueVario®-S Torque screwdriver.  
Torque value can be set via window scale.  
**Automatic release.**

Handle: Torque infinitely adjustable with Torque-Setter setting tool (also supplied). Ergonomic multi-component handle, particularly light and compact. Handle sizes proportioned to optimise torque setting. Audible and perceptible click when the pre-set torque has been attained.

Standards: EN ISO 6798, BS EN 26789, ASME B107.14M.

Accuracy: ±6%, traceable to national standards (•model 0.1-0.6 Nm = ±10%).

Application: For applications where recommended torque settings are important. Use in combination with a Wiha torque interchangeable blade.

Extra: Delivered in practical plastic box, incl. factory calibration certificate.

Order-No.	Nm	⊙	⊞	⊠	⊡
26888 6	0.1-0.6•	4	127	23	1
26461 1	0.4-1.0	4	127	23	1
26462 8	0.8-2.0	4	131	30	1
26463 5	1.0-5.0	4	138	36	1
26464 2	2.0-8.0	4	142	41	1

• Accuracy ±10%



**285-900** Torque-Setter.  
Setting tool for variable torque screwdrivers.  
**Included in every torque screwdriver delivery.**

Blade: Octagonal blade, through hardened, zinc-plated.

Handle: Cellulose acetate with micro-fine surface structure.

Order-No.	⊞	⊠	⊡
26864 0	80	150	1

## TorqueVario®-S sets.



with scale

**2852 S10** TorqueVario®-S Torque screwdriver set, 13 pcs.  
Torque value can be set via window scale.  
**With bit universal holder and 10 Phillips/ Pozidriv/ TORX®/ hex Standard bits.**

Handle: Model 1.0-5.0 Nm.  
Torque infinitely adjustable with Torque-Setter setting tool (also supplied). Ergonomic multi-component handle, particularly light and compact. Audible and perceptible click when the pre-set torque has been attained.

Standards: EN ISO 6798, BS EN 26789, ASME B107.14M.

Accuracy: ±6%, traceable to national standards.

Application: For applications where recommended torque settings are important.

Extra: Delivered in robust metal box, incl. factory calibration certificate.

Order-No.	Series	⊞
26893 0	2852 S10	1
2852	TorqueVario®-S Torque screwdriver, Model 1.0-5.0 Nm	
2859	Torque bit universal holder	
285-900	Torque-Setter	
⊕	7011 Z	PH1x25 PH2x25
⊕	7012 Z	PZ1x25 PZ2x25
⊕	7015 Z	T10x25 T15x25 T20x25 T25x25
⊙	7013 Z	3.0x25 4.0x25



with scale

**NEW**  
**2852 S10-01** TorqueVario®-S Torque screwdriver set, 13 pcs.  
Torque value can be set via window scale.  
**With bit universal holder and 10 TORX®/ TORX PLUS® Standard bits especially for applications with indexable cutter inserts.**

Order-No.	Series	⊞
34614 0	2852 S10-01	1
2852	TorqueVario®-S Torque screwdriver, Model 1.0-5.0 Nm	
2859	Torque bit universal holder	
285-900	Torque-Setter	
⊕	7015 Z	T7x25 T8x25 T9x25 T10x25 T15x25
⊕	7016 Z	7IPx25 8IPx25 9IPx25 10IPx25 15IPx25

## TorqueFix® and easyTorque.



**2850** TorqueFix® torque screwdriver.  
With a fixed torque value pre-set by Wiha.  
**Automatic release.**

Handle: Ergonomic multi-component handle, particularly light and compact. Handle sizes proportioned to optimise torque setting. Audible and perceptible click when the pre-set torque has been attained.

Standards: EN ISO 6798, BS EN 26789, ASME B107.14M.

Accuracy: ±6%, traceable to national standards.

Application: For applications where recommended torque settings are important. Use in combination with a Wiha torque interchangeable blade.

Extra: Delivered in practical plastic box, incl. factory calibration certificate.

Order-No.	Nm	⊙	⊞	⊠	⊡
26127 6	0.5	4	112	23	1
26047 7	0.6	4	112	23	1
26327 0	0.8	4	112	23	NEW
26048 4	0.9	4	112	23	1
26133 7	1.1	4	119	30	1
26049 1	1.2	4	119	30	NEW
26051 4	2.0	4	119	30	1
26128 3	2.5	4	119	30	1
26052 1	3.0	4	126	36	1
26129 0	3.8	4	126	36	1
26053 8	5.0	4	132	41	NEW
26130 6	5.5	4	132	41	1
34533 4	6.0	4	132	41	NEW
26131 3	7.2	4	132	41	1



**291** easyTorque torque screwdriver.  
With a fixed torque value ex-factory.  
**Automatic release.**

Handle: Comfortable handle for good power transfer. Rapid identification with imprint on handle end. Release mechanism upon reaching of torque value. Release accuracy ± 10%. Opening torque not mechanically limited. Mechanism insensitive to industrial lubricants.

Application: For controlled fastening and unfastening of indexable cutter inserts. Easy-to-clean grip surface, especially for industrial applications.

Order-No.	Nm	⊙	⊞	⊠	⊡
30342 6	0.5	4	103	32	1
30343 3	0.6	4	103	32	1
30344 0	0.9	4	103	32	1
30345 7	1.1	4	103	32	1
30346 4	1.2	4	103	32	1
30347 1	1.4	4	103	32	1
30348 8	2.0	4	103	32	1
30349 5	2.5	4	103	32	1
30350 1	3.0	4	103	32	1
30351 8	3.8	4	103	32	1

## easyTorque with blade.



**NEW**  
**291** easyTorque torque screwdriver.  
For Allen screws with fixed torque value.

Blade: Interchangeable blade system for rapid, cost-saving replacement of blade after wear. High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Comfortable handle for good power transfer. Rapid identification with imprint on handle end. Release mechanism upon reaching of torque value. Release accuracy ± 10%. Opening torque not mechanically limited. Mechanism insensitive to industrial lubricants.

Application: For controlled fastening and unfastening of indexable cutter inserts. Recommended torque values matched to specifications from leading indexable cutter insert manufacturers. Easy-to-clean grip surface, especially for industrial applications.

Order-No.	Nm	⊙	⊞	⊠	⊡
33633 2	1.4	2.0	75	103	32
33634 9	2.0	2.5	75	103	32
33635 6	3.0	3.0	75	103	32



**NEW**  
**291** easyTorque torque screwdriver.  
For TORX® screws with fixed torque value.

Order-No.	Nm	⊕	⊞	⊠	⊡
33636 3	0.6	T6	75	103	32
33637 0	0.9	T7	75	103	32
33638 7	1.2	T8	75	103	32
33639 4	1.4	T9	75	103	32
33640 0	2.0	T10	75	103	32
33641 7	3.0	T15	75	103	32



**NEW**  
**291** easyTorque torque screwdriver.  
For TORX PLUS® screws with fixed torque value.

Order-No.	Nm	⊕	⊞	⊠	⊡
33642 4	0.6	6IP	75	103	32
33643 1	0.9	7IP	75	103	32
33644 8	1.2	8IP	75	103	32
33645 5	1.4	9IP	75	103	32
33646 2	2.0	10IP	75	103	32
33647 8	3.0	15IP	75	103	32

# Wiha torque screwdrivers.

### Torque interchangeable blades.



**2859** Torque slotted interchangeable blade. For Wiha torque screwdrivers.  
 Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: grey.  
 Standards: Tip DIN ISO 2380.  
 Application: For applications where recommended torque settings are important.

Order-No.	⌀	⌀	Ø	mm	mm	max. Nm	mm
26227 3	0.25	1.5	4	175	42	0.15	10
26228 0	0.4	2.0	4	175	42	0.4	10
26151 1	0.4	2.5	4	175	42	0.4	10
26277 8	0.5	3.0	4	175	42	0.6	10
26278 5	0.6	3.5	4	175	42	1.1	10
26279 2	0.8	4.0	4	175	42	2.5	10

### Torque interchangeable blades.




**2859** Torque Pozidriv interchangeable blade. For Wiha torque screwdrivers.  
 Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: light blue.  
 Standards: Tip DIN ISO 8764.  
 Application: For applications where recommended torque settings are important.

Order-No.	Ø	Ø	mm	mm	max. Nm	mm
26198 6	PZ0	4	175	42	0.9	10
26148 1	PZ1	4	175	42	3.8	10
26889 3	PZ2	4	175	42	5.5	10



**2859** Torque hex interchangeable blade. For Wiha torque screwdrivers.  
 Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: red.  
 Application: For applications where recommended torque settings are important.

Order-No.	Ø	Ø	mm	mm	max. Nm	mm
26544 1	1.3	4	175	42	0.4	10
26200 6	1.5	4	175	42	0.9	10
26060 6	2.0	4	175	42	1.8	10
26061 3	2.5	4	175	42	3.8	10
26062 0	3.0	4	175	42	5.5	10
26063 7	4.0	4	175	42	8.0	10

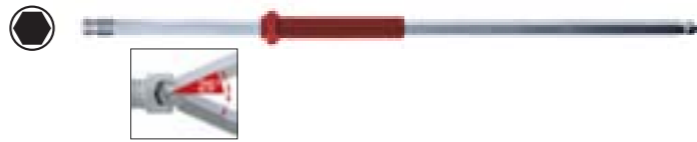

**2859** Torque ball end hex interchangeable blade. For Wiha torque screwdrivers.  
 Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: red.  
 Application: For applications where recommended torque settings are important.  
 Extra: The ball end enables the user to work at angles up to 25°.

Order-No.	Ø	Ø	mm	mm	max. Nm	mm
26221 1	1.5	4	175	42	0.4	10
26222 8	2.0	4	175	42	0.9	10
26223 5	2.5	4	175	42	2.0	10
26224 2	3.0	4	175	42	3.8	10
26225 4	4.0	4	175	42	8.0	10

### Torque interchangeable blades.



**2859** Torque TORX® interchangeable blade. For Wiha torque screwdrivers.  
 Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: dark green.  
 Application: For applications where recommended torque settings are important.  
 Extra: Very slim blade diameter for hard-to-reach screws.

Order-No.	Ø	Ø	mm	mm	max. Nm	mm
30852 0	T4	4	175	42	0.25	10
26158 0	T5	4	175	42	0.4	10
26064 4	T6	4	175	42	0.6	10
26065 1	T7	4	175	42	0.9	10
26066 8	T8	4	175	42	1.3	10
26059 0	T9	4	175	42	2.5	10
26067 5	T10	4	175	42	3.8	10
26068 2	T15	4	175	42	5.5	10
26069 9	T20	4	175	42	8.0	10
26070 5	T25	4	175	42	8.0	10



**2859** Torque TORX® MagicSpring® interchangeable blade. For Wiha torque screwdrivers. Retaining spring holds TORX® screws in place.  
 Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: dark green.  
 Application: For applications where recommended torque settings are important.  
 Extra: Very slim blade diameter for hard-to-reach screws.

Order-No.	Ø	Ø	mm	mm	max. Nm	mm
27818 2	T6	4	175	42	0.6	10
27812 0	T7	4	175	42	0.9	10
27813 7	T8	4	175	42	1.3	10
27814 4	T9	4	175	42	2.5	10
27815 1	T10	4	175	42	3.8	10
27816 8	T15	4	175	42	5.5	10
27817 5	T20	4	175	42	8.0	10
29467 0	T25	4	175	42	8.0	10



**2859** Torque bit universal holder. For Wiha torque screwdrivers. Suitable for C 6.3 and E 6.3 (1/4") bits.  
 Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.  
 Sleeve: Made of stainless steel, blue plastic coated.  
 Application: For applications where recommended torque settings are important.

Order-No.	Ø	Ø	mm	mm	mm
27526 6	1/4	4	162	11	10

### Torque interchangeable blades.



**2859** Torque TORX PLUS® interchangeable blade. For Wiha torque screwdrivers.  
 Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: light green.  
 Application: For applications where recommended torque settings are important.  
 Extra: Very slim blade diameter for hard-to-reach screws.

Order-No.	Ø	Ø	mm	mm	max. Nm	mm
26159 7	5IP	4	175	42	0.5	10
26071 2	6IP	4	175	42	0.8	10
26152 8	7IP	4	175	42	1.3	10
26072 9	8IP	4	175	42	2.0	10
26154 2	9IP	4	175	42	3.0	10
26155 9	10IP	4	175	42	4.5	10
26073 6	15IP	4	175	42	6.6	10
26156 6	20IP	4	175	42	8.0	10
26157 3	25IP	4	175	42	8.0	10



**2859** Torque TORX PLUS® MagicSpring® interchangeable blade. For Wiha torque screwdrivers. Retaining spring holds TORX PLUS® screws in place.  
 Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Colour-coding: light green.  
 Application: For applications where recommended torque settings are important.  
 Extra: Very slim blade diameter for hard-to-reach screws.

Order-No.	Ø	Ø	mm	mm	max. Nm	mm
29553 0	6IP	4	175	42	0.8	10
29554 7	7IP	4	175	42	1.3	10
29555 4	8IP	4	175	42	2.0	10
29556 1	9IP	4	175	42	3.0	10
29557 8	10IP	4	175	42	4.5	10
29558 5	15IP	4	175	42	6.6	10
29559 2	20IP	4	175	42	8.0	10
29560 8	25IP	4	175	42	8.0	10



**2859** Torque adapter blade. For Wiha torque screwdrivers. Suitable for 1/4" square sockets.  
 Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.  
 Head: Nickel-plated, spring-mounted ball.  
 Application: For applications where recommended torque settings are important.

Order-No.	Ø	Ø	mm
26229 7	1/4	4	155