



## light source

work equipment  
connected load  
Power consumption  
luminous flux  
luminous efficacy  
colour temperature  
color rendering index (CRI)  
glare control  
System of protection  
class of protection  
operation  
luminaire body

lamp cover  
tubular sections

balance of articulation joints  
weight (net)  
mains lead

Fastening

LED

Energy efficiency category A/A+/A++

electronic transformer

100-240 V; 50/60 Hz

approx. 24 W

approx. 1300 lm

approx. 54 lm/W

neutral white, approx. 4000 K

>= 80

conical prismatic screen

IP20

I

multi-function switch

sectional aluminium, anodised, aluminium coloured  
anodised

acrylic clear

tubular aluminium section, anodized, aluminium coloured  
anodised

spring

approx. 1.9 kg

approx. 3,4 m; mains plug

BS 1363 A

screw-down flange, table clamp (accessory), wall bracket  
(accessory)




BS 1363 A

## illuminance

distance: 50 cm

Em: 1137 lx  
Emax: 3053 lx  
Emin: 159 lx

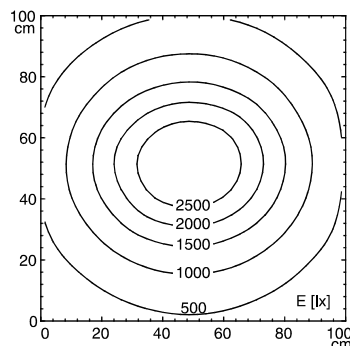

## luminous intensity

