



Switches > Slide Switches



Contact Current Rating: **.4 A**

Configuration (Pole-Throw): **Single Pole - Three Throw**

Contact Base Material: **Copper Alloy**

Number of Actuators: **Single**

Number of Positions: **3**

Features

Configuration Features

Configuration (Pole-Throw)	Single Pole - Three Throw
Number of Actuators	Single
Number of Positions	3
Operating Function	On On On

Electrical Characteristics

Contact Current Rating	.4 A
Operating Voltage	20 VDC

Body Features

Actuator Orientation	Top
Actuator Travel	2 mm[.079 in]
Actuator Material	POM
Actuator Color	Black

Contact Features

Contact Base Material	Copper Alloy
Switch Contact Plating Material	Gold

Termination Features

Termination Post & Tail Length	3.8 mm[.15 in]
Termination Method to PCB	Through Hole - Solder

Dimensions



Product Width	8.2 mm[.323 in]
Product Length	24 mm[.945 in]
Actuator Length	3.8 mm[.15 in]

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features

Packaging Method	Tray
------------------	------

Other

Grade	Instrumentation
-------	-----------------

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | Alcoswitch MSS

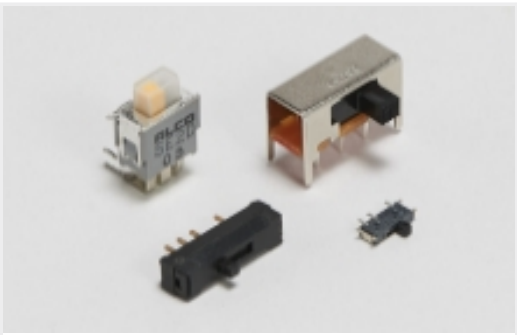

Slide Switches(15)

Customers Also Bought



TE Part #CAT-D625-L52
DIP Socket: Low Profile, Stamped & Formed, Open, Tin



TE Part #4-1879338-9
CPF 0603 84K5 1% 50PPM 1K RL



TE Part #6-1879225-0
CPF 0603 182K 0.1% 25PPM 1K RL




TE Part #9-1879261-1
RP 2B 12K1 0.1% 15PPM CUT LENGTH



TE Part #4-1879222-1
CPF 0603 49R9 0.1% 25PPM 1K RL



TE Part #1-1879223-5
CPF 0603 332R 0.1% 25PPM 1K RL

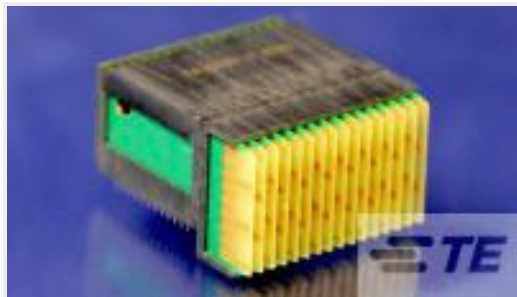

TE Part #1410970-3
MULTIGIG RT T2 7RW RTM MIXED DC



TE Part #2085945-1
QSFP+ Assy, 2x1, Gskt, 2LP-Outr, Sn EONs



TE Part #2-1625876-6
CBT 1/2 5% 2R2

Documents

Product Drawings

MSS1300G04=SP3T SL SW VERT AU

English

Datasheets & Catalog Pages

SWITCHES_CORE_PROGRAM_CATALOG

English