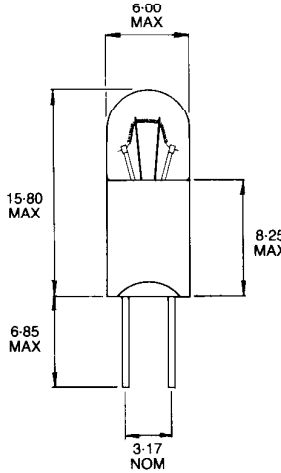
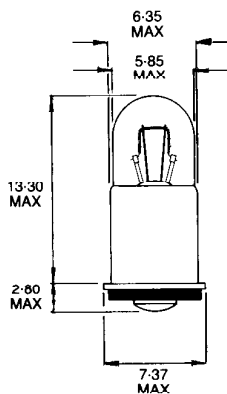


SUB-MINIATURE LAMPS

vch
INTERNATIONAL

T-1¾	6mm	Lamp Number	Volts	Amps	Lumens	MSCP	Life (hours)	Filament Shape		
Bi-Pin  FIG. 21		CM7362	5.0	0.115	1.90	0.15	20,000	C-2R		
		CM7945	6.0	0.04	0.40	0.03	10,000	C-2R		
		CM7328	6.0	0.20	7.50	0.60	1,000	C-2R		
		CM7380	6.3	0.04	0.25	0.02	20,000	C-2V		
		CM7381	6.3	0.20	5.00	0.40	20,000	C-2R		
		CM7371	12.0	0.04	1.50	0.12	10,000	C-2V		
		CM7382	14.0	0.08	3.80	0.30	15,000	C-2F		
		CM7330	14.0	0.08	6.30	0.50	1,000	C-2F		
		CM7370	18.0	0.04	1.90	0.15	10,000	C-2F		
		CM7387	28.0	0.04	4.00	0.30	7,000	C-2F		
		CM7327	28.0	0.04	4.50	0.34	4,000	C-2F		
		CM7374	28.0	0.04	2.50	0.20	20,000	C-2F		
		CM7376	28.0	0.065	8.20	0.65	5,000	C-2F		
		Midget Flange (SX6s)  FIG. 22		CM368	2.5	0.20	2.80	0.22	500	C-2R
				726	4.0	0.26	4.50	0.36	5,000	C-2R
				CM7333	5.0	0.06	0.63	0.05	25,000	C-2R
				CM345	6.0	0.04	0.40	0.03	10,000	C-2R
				723	6.0	0.10	2.50	0.20	5,000	C-2R
CM328	6.0			0.20	7.50 ¹	0.60 ²	1,000	C-2R		
CM380	6.3			0.04	0.25	0.02	20,000	C-2V		
CM381	6.3			0.20	5.0	0.40	20,000	C-2R		
CM344	10.0			0.014	0.025	0.002	10,000	C-2F		
CM367	10.0			0.04	1.00	0.08	5,000	C-2F		
CM394	12.0			0.04	1.50	0.12	10,000	C-2V		
725	12.0			0.10	5.00	0.40	5,000	C-2V		
740	12.0			0.09	4.00	0.32	20,000	C-2V		
733	14.0			0.037	1.60	0.13	5,000	C-2F		
CM330	14.0			0.08	6.30	0.50	1,000	C-2F		
CM382	14.0			0.08	3.80	0.30	15,000	C-2F		
CM370	18.0			0.04	1.90	0.15	10,000	C-2F		
1116	28.0			0.024	1.70	0.14	2,500	C-2F		
CM385	28.0			0.04	2.50	0.20	50,000	C-2F		
CM387	28.0			0.04	3.80	0.30	7,000	C-2F		
CM327	28.0			0.04	4.20	0.34	4,000	C-2F		
727	28.0			0.04	4.50	0.36	4,000	C-2F		
736	28.0			0.04	4.00	0.32	10,000	C-2F		
CM376	28.0	0.06	4.30	0.34	25,000	C-2F				
729	28.0	0.08	10.00	0.80	2,000	C-2F				
730	48.0	0.025	4.00	0.32	2,500	C-2F				
777	60.0	0.02	2.20	0.17	3,000	CC-2F				
		¹ 4.3 Lumens at 5V		² 0.34 MSCP at 5V						

Drawing Scale 2:1