



**Countersunk Ring Magnet**  
**Part Number : M1218**  
**Product Data Sheet**

PICTURE	DIMENSIONS
---------	------------

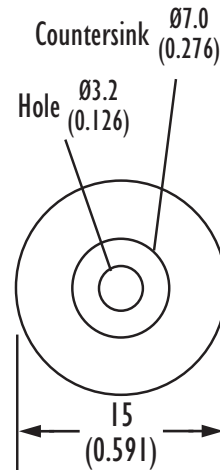

Drawings not to scale  
 All dimensions in mm nominal

**✓ RoHS Compliant**

SPECIFICATION	
---------------	--

Gauss strength at surface	1100
Magnet Material	Sintered Ferrite (Magnetised Axially)
Operating Temperature	300°C Max.
Plating	N/A
Fixing	Use non magnetic screws

Applications Include	Options
----------------------	---------

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>● Position and limit sensing.</li> <li>● Linear actuators.</li> <li>● Security system switch.</li> <li>● Door Switch.</li> </ul> | <ul style="list-style-type: none"> <li>● Other types available</li> <li>● Neodymium and Alcomax magnets available.</li> <li>● Housed and threaded magnets available</li> <li>● If you do not see what you need, jusk ask, as there is a strong possibility we can do it !</li> </ul> |
|---|--|

Rev. No.	Revision Note	Date	Signature
1	Datasheet	08-03-12	ML



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

**Phone : +44 (0)1255 862236      www.assemtech.co.uk      Fax: +44 (0)1255 862014**

©2012 Copyright Assemtech Europe Ltd, Unit 7, Rice Bridge Industrial Estate, Thorpe - Le - Soken, Essex, CO16 0HL, ENGLAND.  
 USA: Comus International:+1 973 777 6900, Belgium: Comus Belgium BVBA: +32 (0)12 390400