


## Features

- Precision Planetary Geared Motor
- Integrated Low-Voltage DC Brushless Pancake Motor
- High Resolution Encoder
- No Holding Brake

## RS PRO DC Geared Motor, 500 W – 50:1 Gear Ratio

RS Stock No.: 0192526

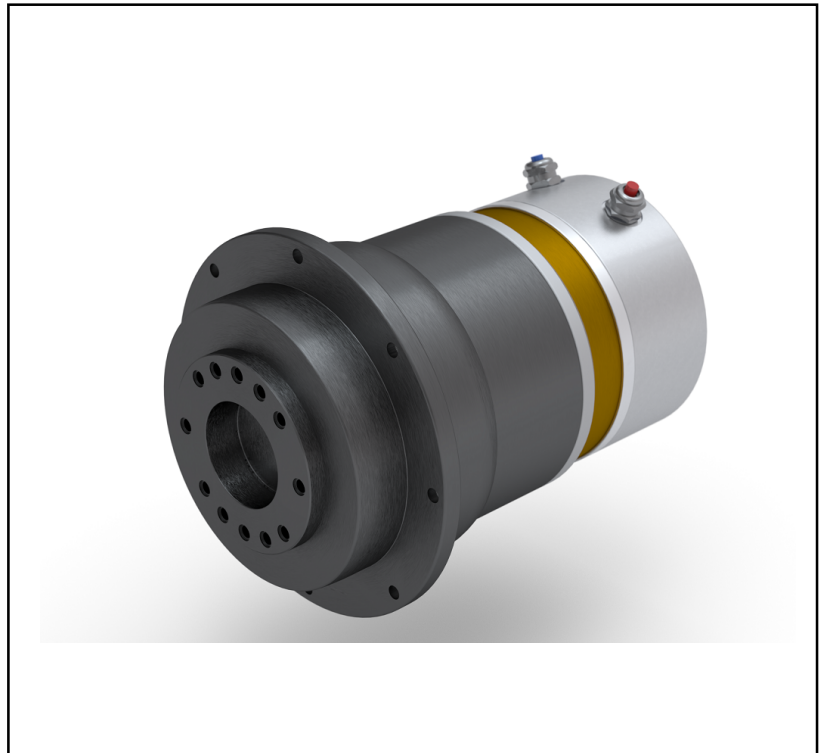

RS PRO is the own brand of RS. The RS PRO Seal of Approval is your assurance of professional quality, a guarantee that every part is rigorously tested, inspected, and audited against demanding standards. Making RS PRO the Smart Choice for our customers.

## Product Description

*Experience exceptional motion control with the RS PRO Precision Planetary Geared Motor, featuring an integrated brushless motor for smooth and reliable performance. These motors are engineered to tackle demanding tasks, offering high continuous and peak torque, making them perfect for applications that require consistent power and durability.*

*Operating efficiently at a low voltage of 48V DC, these motors ensure safety and compatibility with various power systems. Their powerful 500W rating provides the necessary strength for various industrial and commercial uses.*

## General Specifications

DC Motor Type	Brushless
Output Speed (No Load)	30-187rpm (depending on gear ratio)
Speed at Max. Torque	29-178rpm (depending on gear ratio)
Gearhead Type	Planetary
Gear Ratio	50:1

## Electrical Specifications

Power Rating	500W
Supply Voltage	48V DC
Current Rating (No Load)	
Current at Max. Torque	
Maximum Output Torque	29-188Nm (depending on gear ratio)
Rated Tolerance Torque	1.0 kgf-cm Maximum
Max momentary Tolerance Torque	3.0 kgf-cm
Efficiency	65%
EMC Filter	Yes/No

Reduction Table RPM Supply Voltage	3V	6V	9V	12V
Speed	32rpm	65rpm	97rpm	129rpm

## Mechanical Specifications

Shaft Diameter	6mm
Core Construction	Iron Core
Shaft Angle	Straight
Dimensions	124mm x 124mm x 232mm
Length	124mm
Width	124mm
Depth	232mm
Reduction Ratio	10,16,20,25,50and 100:1
Weight	9.8kg
Life Span	20,000 h

Gearbox Housing Material	Metal
Backlash at No-Load	< 3°
Bearing at Output	Sleeve bearings
Radial Load (10mm from flange)	< 0.5kgf
Shaft Axial Load	< 0.5kgf
Shaft Press Fit Force Max.	< 1.5kgf
Radial Play of Shaft	< 0.08mm
Thrust Play of Shaft	< 0.2mm

## Protection Category

IP Rating	IP65
-----------	------

## Classification

eCl@ss Version	
UNSPSC Version	

## Approvals

Compliance/Certifications	CE / CSA / UL94-V0
Standards Met	Approved Class B Insulation System; NEMA 23 Mounting; NEMA TEFC Enclosure
Declarations	