

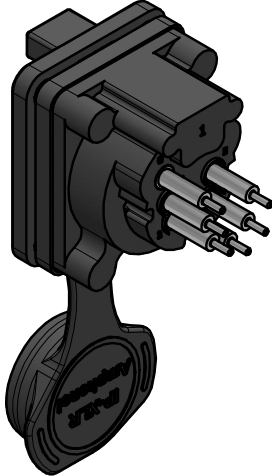
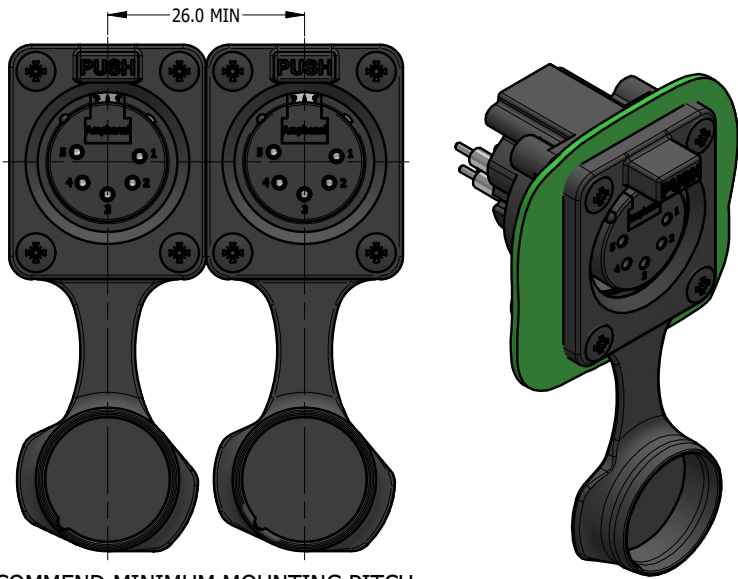
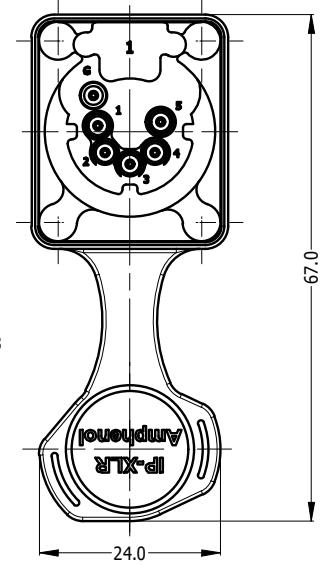



CAPPED VIEW

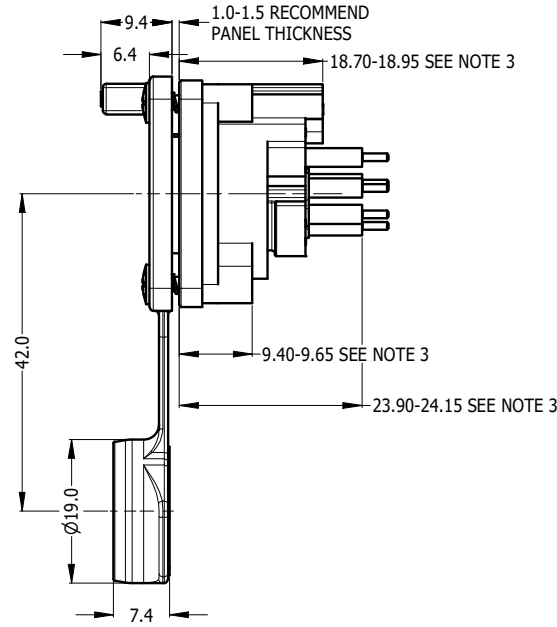


REAR VIEW

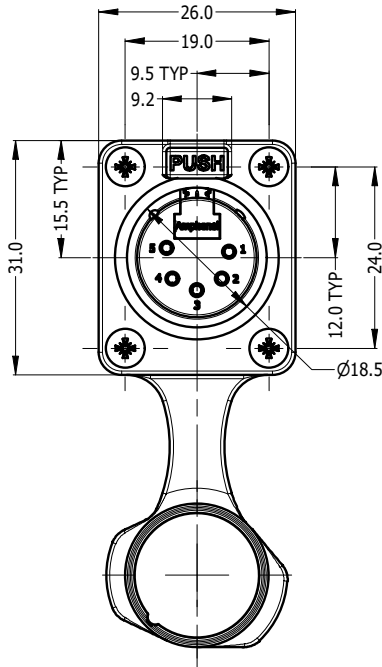


RECOMMEND MINIMUM MOUNTING PITCH

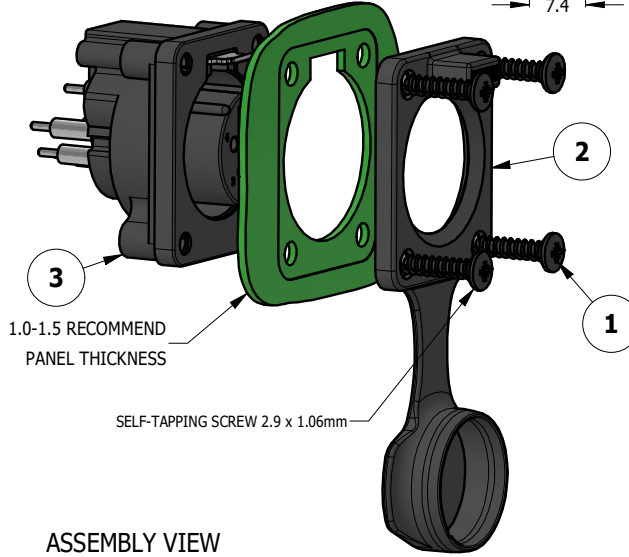

ASSEMBLY VIEW

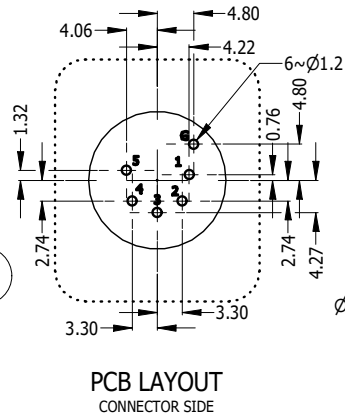

PCB LAYOUT
CONNECTOR SIDE

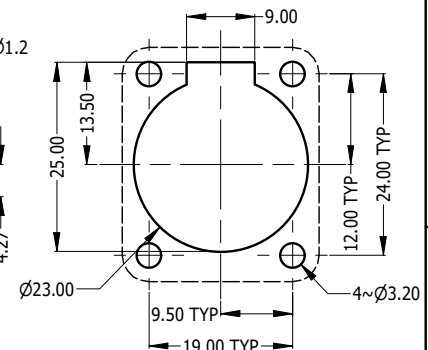

RECOMMEND PANEL CUT OUT

- NOTE:
1. MATING CONNECTOR SHELL TO HAVE MIN 1.6 SURFACE FINISH TO ACHIEVE IP RATING OF THIS CONNECTOR.
 2. BLACK MOUNTING SCREW 52500011-430 x 4 PCS TO BE SUPPLIED WITH THE CONNECTOR, MAX TORQUE 0.5Nm.
 3. DUE TO 0.4mm THICK RUBBER SEAL, THE DIM WILL VARY DEPENDING ON THE SCREWS TIGHTENING IN ASSEMBLY.

3	55011487-005/905	AXS5FHV WITHOUT RUBBER FLANGE - TIN/GOLD PLATED CONTACT	1
2	52730032-000	AXS OVERMOLDED RUBBER FLANGE BLACK	1
1	52500011-430	SELF TAPPING SCREW 2.9 x 1.06mm BLACK	4
ITEM	PART NUMBER	DESCRIPTION	QTY

UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE	
LINEAR	ANGULAR
X ± 0.5	X' ± 1
X.X ± 0.2	X.X' ± 30'
X.XX ± 0.1	X.XX' ± 15'
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS	
DO NOT SCALE	
DIMENSIONS IN MILLIMETRES	

THIS DOCUMENT IS THE PROPERTY OF AMPHENOL AUSTRALIA PTY. LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER	
MATERIAL: SEE COMPONENT	DRN: M.H
FINISH: SEE COMPONENT	DATE: 15-05-23
	CKD: M.H
	DATE: 10-05-24
	APP'D: P.M
	DATE: 10-05-24
	SCALE: 1:1
	SIZE: A4

Amphenol		Amphenol Australia Pty.Ltd, 22 Industry Blvd, Carrum Downs, VIC 3201	
TITLE: AXS5FPV AXS PANEL MOUNT SERIES CUSTOMER DRAWING		PART No. SEE TABLE	
CAD FILE: 55011487805112		DRAWING No. 55011487-805-2	SHEET 2/2