

CUS Series

High Reliability, Ultra Low Profile, High Efficiency, Industrial Power Supply



TDK-Lambda

TDK-Lambda introduces CUS Series

***Ultra Low Profile**

***High Efficiency**

***High Reliability**

**Switching
Power Supply**



CUS Series

High Reliability,
Ultra Low Profile,
High Efficiency,
Industrial Power Supply

CUS Series

Development Background

For low environmental burden and promoting nature protection activities, TDK-Lambda introduces Ultra Low Profile, High Efficiency, High Reliability Power Supply-CUS Series.

Wide Range Input Industrial Power Supply

The most cost effective, reliable power supply solutions.

Key Market Segment & Application




Medical



Electric Power



Industrial



LED



COMM

Instruction for your safety

Please be sure to pay attention to following all cautions and warnings before using the unit. Incorrect usage could lead to an electrical shock, damage to the unit or a fire hazard.

Warning

- Do not modify, disassemble or remove the cover. These actions could cause electrical shock. We shall never be responsible for any problems caused by your reconstruction or modification.
- Do not touch the internal components. They may have high voltage or high temperature. You may get electrical shock or burnt.
- When the unit is operating, keep your hands and face away from it. Otherwise, you may get injured by an accident.

Caution

- Please read catalogue and instruction manual carefully before use.
- Cut off the input when proceeding connection of input power and/or output power.
- Use the products within the specified input voltage, input current, temperature and humidity. Use of products in non-specified condition may damage the product.
- Connect the frame ground terminal to the ground terminal of the device for safety and noise reduction. Use of the products without ground connection may cause an electrical shock.
- In case the internal fuse is blown out, do not replace the fuse as some components may be damaged. Contact our repair service.
- Built-in fan and electrolysis condenser need periodical maintenance. Please set the overhaul period and do the maintenance periodically.
- Product may be damaged by accident or unexpected situation. Please secure the fail-safe function for application with the device which requires high reliability concerned with nuclear power, aerospace or aviation, traffic control, medical instruments and so on.
- Do not use the product in the environment with water, moisture, dust, strong electromagnetic field, erosive (including vulcanization) gas etc, or any environment where conductive foreign substance may enter.
- Export the products, should follow all applicable export related laws and procedures.

* Stated value of noise terminal voltage, noise electric field strength & immunity are taken under our measurement standard condition. Therefore, please be sure that this value could differ under the different conditions. It is recommended that the evaluation will be done by you with your actual condition.

* The contents of this catalogue are subject to change without notice. If necessary, please obtain the latest product specifications before ordering.

CUS Series Single Output 100W, 250W

2~3 years warranty


According to different Models



Feature

- Wide Range Input High Reliability Power Supply
- High Power Density, Efficiency up to 90%
- No Fan, no noise
- Flexible thermal design, easy to increase Power
- CUS100M series guarantee to start up at -30°C, CUS250 series can be started at -40°C
- CUS100M series approved by Medical Safety Certificate
- 2 Years Warranty: CUS250LD
- 3 Years Warranty: CUS100M, CUS250

Part Numbering

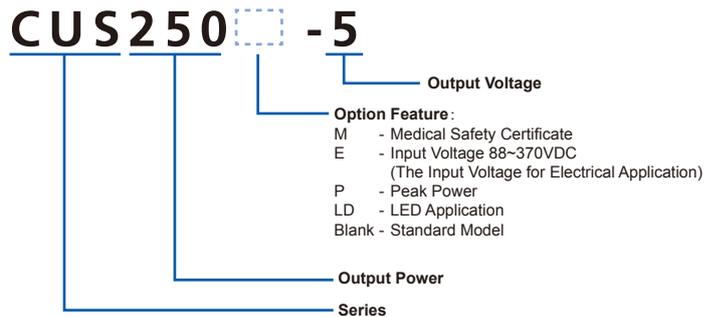

Key Market Segment & Application



In accordance with ROHS Directive

According to EU DIRECTIVE 2002/95/EC, the declare did not use Lead, Cadmium, Mercury, Hexavalent Chromium and specific Bromide Fireproofing Agents PBB, PBDEs (Except specified exempt purposes).

Model Selector

Output Voltage	CUS100M		CUS250		CUS250LD	
	(Convection cooling/Forced air cooling) Output Current	Model	Output Current	Model	Output Current	Model
3.3V	-	-	50A	CUS250-3	50A	CUS250LD-3
4.2V	-	-	50A	CUS250-4	50A	CUS250LD-4
5V	12A/16A	CUS100M-5	50A	CUS250-5	50A	CUS250LD-5
12V	6.7A/8.4A	CUS100M-12	21A	CUS250-12	21A	CUS250LD-12
15V	5.4A/6.7A	CUS100M-15	-	-	-	-
24V	3.4/4.2A	CUS100M-24	10.5A	CUS250-24	10.5A	CUS250LD-24

CUS100M SPECIFICATIONS

ITEMS		MODEL	CUS100M-5	CUS100M-12	CUS100M-15	CUS100M-24
1	Nominal Output Voltage	V	5	12	15	24
2	Maximum Output Current @ Convection cooling	A	12	6.7	5.4	3.4
	Maximum Output Current @ Force air cooling	A	16	8.4	6.7	4.2
3	Maximum Output Power @ Convection cooling	W	60	80.4	81	81.6
	Maximum Output Power @ Force air cooling	W	80	100.8	100.5	100.8
4	Efficiency @ Convection cooling (Typ) (115/230VAC) (* 1)	%	83/84	88/90	88/90	89/90
	Efficiency @ Force air cooling (Typ) (115/230VAC) (* 1)	%	81/83	87/88	88/89	88/90
5	Input Voltage Range (* 2)	-	85 ~ 265VAC (47-440Hz) or 120 ~ 370VDC			
6	Input Current @ Convection cooling (Typ) (115/230VAC) (* 1)	A	1.2 / 0.7		1.5 / 0.9	
	Input Current @ Force air cooling (Typ) (115/230VAC) (* 1)	A	1.5 / 0.9		1.8 / 1.2	
7	Inrush Current (Typ) (* 1, 3)	-	30A / 60A at Cold Start			
8	Output Voltage Range	%	-10 / +10			
9	Maximum Ripple and Noise (* 1, 4, 5)	mV	120	120	150	150
10	Maximum Line Regulation (* 4, 6)	mV	20	48	60	96
11	Maximum Load Regulation (* 4, 7)	mV	40	96	120	192
12	No Load Power Consumption	W	< 0.5 @ 230VAC, Nominal Output Voltage			
13	Temperature Coefficient (* 4)	-	Less than 0.02%/°C			
14	Over Current Protection (* 8)	-	> 16.9	> 8.7	> 6.9	> 4.4
15	Over Voltage Protection (* 9)	V	115% - 145%			
16	Hold-Up Time (Typ) (* 1)	ms	10ms / 20ms			
17	Leakage current (* 10)	-	Less than 0.25mA at 265VAC			
18	Parallel Operation	-	No			
19	Series Operation	-	Possible			
20	Operating Temperature (* 11)	-	- 25 ~ + 70°C, star up at -30°C			
21	Operating Humidity	-	10 ~ 90 %RH (No dewdrop)			
22	Storage Temperature	-	- 40 ~ +85°C			
23	Storage Humidity	-	10 ~ 95%RH (No dewdrop)			
24	Cooling (* 12)	-	Convection or Force Air cooling			
25	Withstand Voltage	-	Input - FG : 2kVAC (20mA), Input - Output : 4kVAC (20mA) Output - FG : 1.5kVAC (100mA) for 1min.			
26	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH, Output - FG : 500VDC			
27	Vibration	-	At no operating, 10 - 500Hz (sweep for 1min) 19.6m/s ² Constant, X, Y, Z 1hour each			
28	Shock	-	Less than 196.1m/s ² MIL-STD-810F			
29	Safety	-	Designed to meet UL60601-1 (cTUVus); EN60601-1; IEC 60601-1 2nd Edition; IEC60601-1 3rd Edition; IEC 60950-1 2nd Edition CB Designed to meet EN60950-1; UL60950-1; CSA60950-1 (cTUVus)			
30	Conductive Emission (* 1)	-	Designed to meet EN55011-B, EN55022-B, FCC-Class B			
31	Radiated Emission @ Convection cooling (* 1)	-	Designed to meet EN55011-B, EN55022-B, FCC-Class B			
	Radiated Emission @ Force air cooling (* 1)	-	Designed to meet EN55011-A, EN55022-A, FCC-Class A			
32	Immunity	-	Designed to meet IEC61000-4-2(Level 2,3), -3(Level 3), -4(Level 3), -5(Level 3,4), -6(Level 3), -8(Level 4), -11			
33	Harmonic Current	-	Designed to meet IEC61000-3-2, Class A @ 80W Output			
34	Weight (Typ)	g	150			
35	Size (LxWxH)	mm	101.6 x 50.8 x 25.4 (Refer to Outline Drawing)			

* Read instruction manual carefully , before using the power supply unit.

= NOTES=-

* 1 : At 115VAC/230VAC, Ta = 25°C, nominal output voltage and maximum output power.

* 2 : For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100-240VAC, 50 / 60Hz on name plate.

* 3 : Not applicable for the in-rush current to Noise Filter for less than 0.2ms.

* 4 : Ripple & noise are measured at 20MHz by using a 12" twisted pair of load wires terminated with a 0.1uF and 47uF capacitor.

* 5 : Measured line & load regulation at output terminal.

* 6 : 85 - 265VAC, constant load.

* 7 : No load - Full load (Maximum power), constant input voltage.

* 8 : Current limiting (hiccup) with automatic recovery. Avoid to operate at overload or dead short for more than 30seconds.

* 9 : OVP circuit will shutdown output, manual reset (Re power on).

* 10: Measured by each measuring method of UL, CSA, EN (at 60Hz), Ta = 25°C.


* 11: Refer to output derating curve (CA802-01-02_) for details of output derating versus ambient temperature, input voltage and mounting method.

- Load (%) is percent of maximum output power or maximum output current.


- Do not exceed its derating of Maximum Load.

- 100% load start up at -30°C is possible. However, it may not fulfil all the specifications.

* 12: Force air cooling with air velocity more than 1.5m/s (measured at component side of PCB, air must flow through component side)

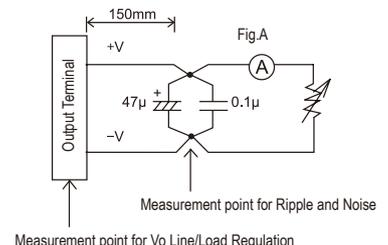

CUS100M OUTLINE

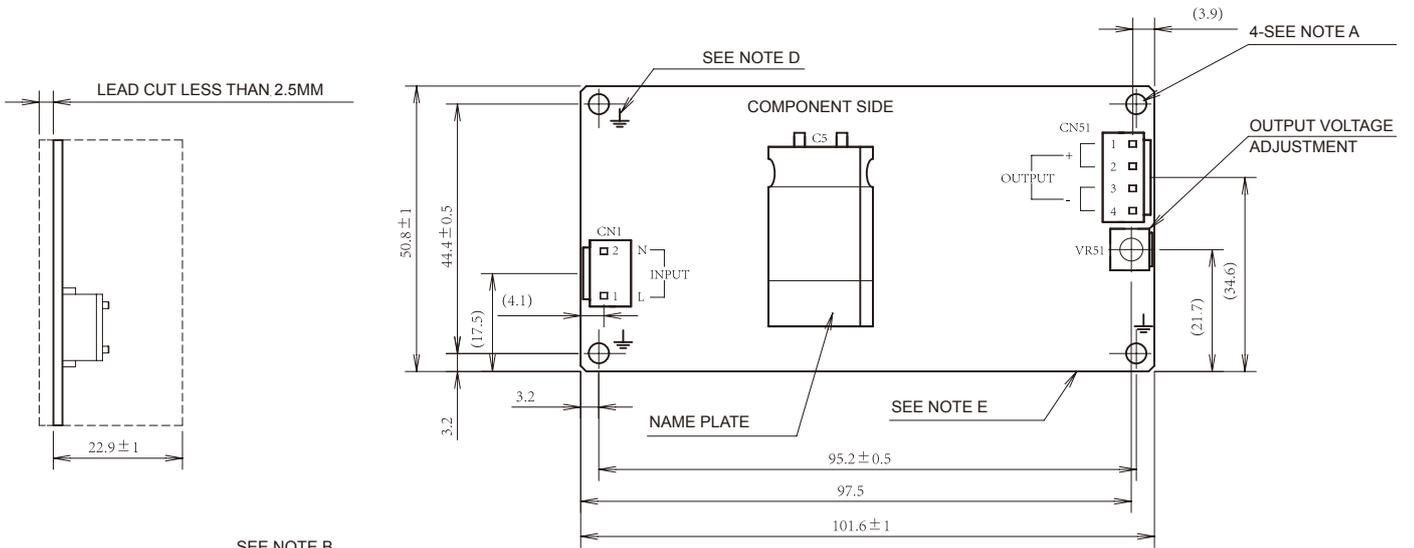

SEE NOTE B

CUS100M-5
 INPUT: 100-240VAC-1.5 A
 50-60Hz
 OUTPUT: 5 V --- 16 A

BAR CODE




TDK Lambda
 MADE IN CHINA

SEE NOTE C

NOTES

- A: 4-Ø3.5 HOLES ARE FOR CUSTOMER'S CHASSIS MOUNTING HOLES. ALL MUST BE SCREWED IN ORDER TO CONFORM THE VIBRATION/EMI SPEC.
- B: MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, AND MAXIMUM OUTPUT CURRENT ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- C: COUNTRY OF MANUFACTURE WILL BE SHOWN HERE.
- D: IS FOR SAFETY GROUND CONNECTION.
- E: TO KEEP THE DISTANCE MORE THAN 5mm BETWEEN PCB EDGE AND CUSTOMER'S CHASSIS.

CUS100M OUTPUT DERATING

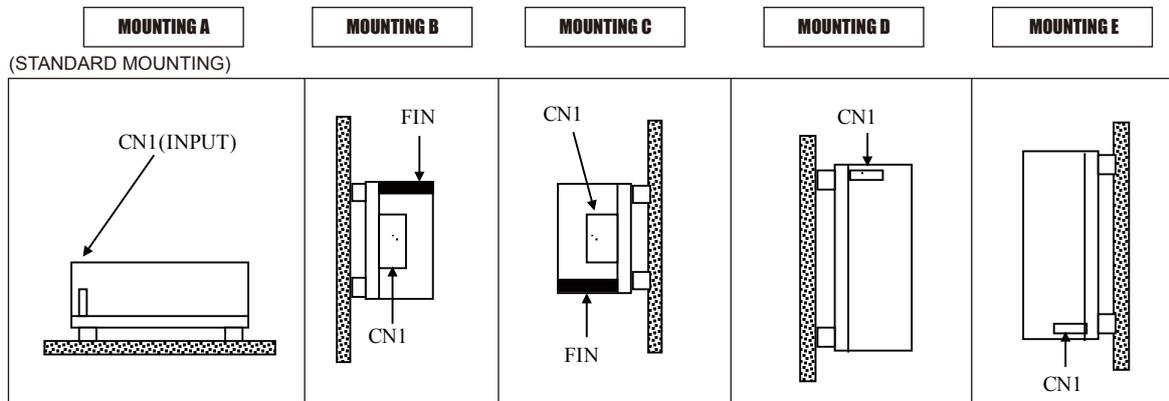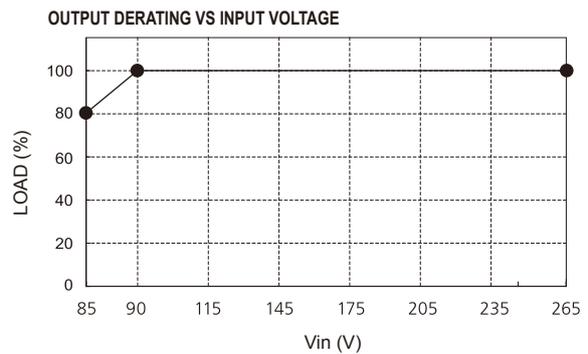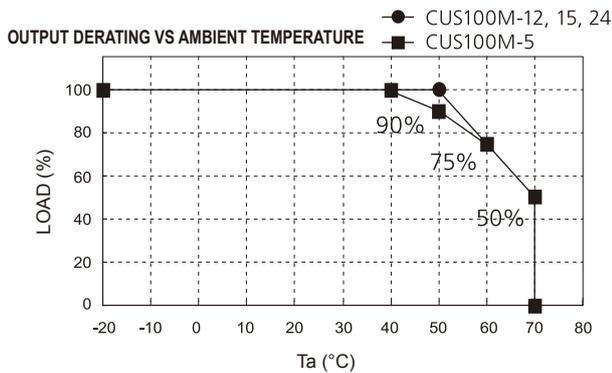

CUS250 SPECIFICATIONS


ITEMS		MODEL	CUS250-3	CUS250-4	CUS250-5	CUS250-12	CUS250-24
1	Nominal Output Voltage	V	3.3	4.2	5	12	24
2	Maximum Output Current	A	50	50	50	21	10.5
3	Maximum Output Power	W	165	210	250	252	252
4	Efficiency (Typ) (230VAC)	(* 1) %	86/88	87/89	88/90	88/90	88/90
5	Input Voltage Range	(* 2,11) -	85 ~ 265VAC (47-63Hz) or 120 ~ 370VDC (Withstand 300VAC Surge for 5 seconds)				
6	Input Current (Typ) (230VAC)	(* 1) A	2.0/1.0	2.4/1.2	2.8 / 1.4	2.8 / 1.4	2.8 / 1.4
7	Inrush Current (Typ)	(* 3) -	20A at 115VAC, 40A at 230VAC, Ta = 25°C, Cold Start				
8	PFHC	-	Designed to meet IEC61000-3-2				
9	Power Factor (Typ) (230VAC)	(* 1) -	0.98 / 0.95				
10	Output Voltage Range	V	2.97 - 3.63	3.78 - 4.62	4.5 - 5.5	10.8 - 13.2	21.6 - 26.4
11	Ripple and Noise	(* 1, 4) mV	120	120	120	120	150
12	Line Regulation	(* 5, 6) mV	20	20	20	48	96
13	Load Regulation	(* 5, 7) mV	40	40	40	96	192
14	Temperature Coefficient	-	Less than 0.02%/°C				
15	Over Current Protection	-	>105%				
16	Over Voltage Protection	(* 9) V	4.00 - 5.25	5.00 - 6.50	5.75 - 7.50	13.8 - 16.2	27.6 - 32.4
17	Hold-Up Time (Typ)	(* 1) ms	20				
18	Leakage current	(* 10) -	Less than 0.75mA at 240VAC				
19	Parallel Operation	-	---				
20	Series Operation	-	Possible				
21	Operating Temperature	(* 11) -	- 25 ~ + 70°C (Refer to Output Derating Curve)				
22	Operating Humidity	-	30 ~ 90 %RH (No dewdrop)				
23	Storage Temperature	-	- 30 ~ +75°C				
24	Storage Humidity	-	10 ~ 95%RH (No dewdrop)				
25	Cooling	-	Convection cooling				
26	Withstand Voltage	-	Input - Output : 3kVAC (20mA), Input - FG : 2kVAC (20mA) Output - FG : 500VAC (100mA) for 1min.				
27	Isolation Resistance	-	More than 100MΩ at Ta = 25°C and 70%RH, Output - FG : 500VDC				
28	Vibration	-	At no operating, 10 - 55Hz (sweep for 1min) 19.6m/s ² Constant, X, Y, Z 1 hour each				
29	Shock	-	Less than 196.1m/s ²				
30	Safety		Approved by UL60950-1, CSA60950-1(cTUVus), EN60950-1, EN50178				
31	EMI		Designed to meet EN55022-B, CISPR22-B				
32	Immunity	-	Designed to meet EN61000-4-2(Level 2,3), -3(Level 3), -4(Level 3), -5(Level 3,4), -6(Level 3), -8(Level 4), -11				
33	Weight (Typ)	g	700				
34	Size (LxWxH)	mm	198 x 102 x 30 (Refer to Outline Drawing)				

* Read instruction manual carefully , before using the power supply unit.

= NOTES=

- * 1 : At 115VAC/230VAC, Ta=25°C, nominal output voltage and maximum output power.
- * 2 : For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100-240VAC, 50 / 60Hz on name plate.
- * 3 : Not applicable for the in-rush current to Noise Filter for less than 0.2ms.
- * 4 : Ripple & noise are measured at 20MHz by using a 12" twisted pair of load wires terminated with a 0.1uF and 47uF capacitor.
- * 5 : Measured line & load regulation at output terminal.
- * 6 : 85 - 265VAC, constant load.
- * 7 : No load - Full load (Maximum power), constant input voltage.
- * 8 : Current limiting (hiccup) with automatic recovery. Avoid to operate at overload or dead short for more than 30seconds.
- * 9 : OVP circuit will shutdown output, manual reset (Re power on).
- * 10: Measured by each measuring method of UL, CSA, EN (at 60Hz), Ta = 25°C.
- * 11: Refer to output derating curve (CA802-01-02) for details of output derating versus ambient temperature, input voltage and mounting method.
Load (%) is percent of maximum output power or maximum output current.
Do not exceed its derating of Maximum Load.

CS250 OUTLINE

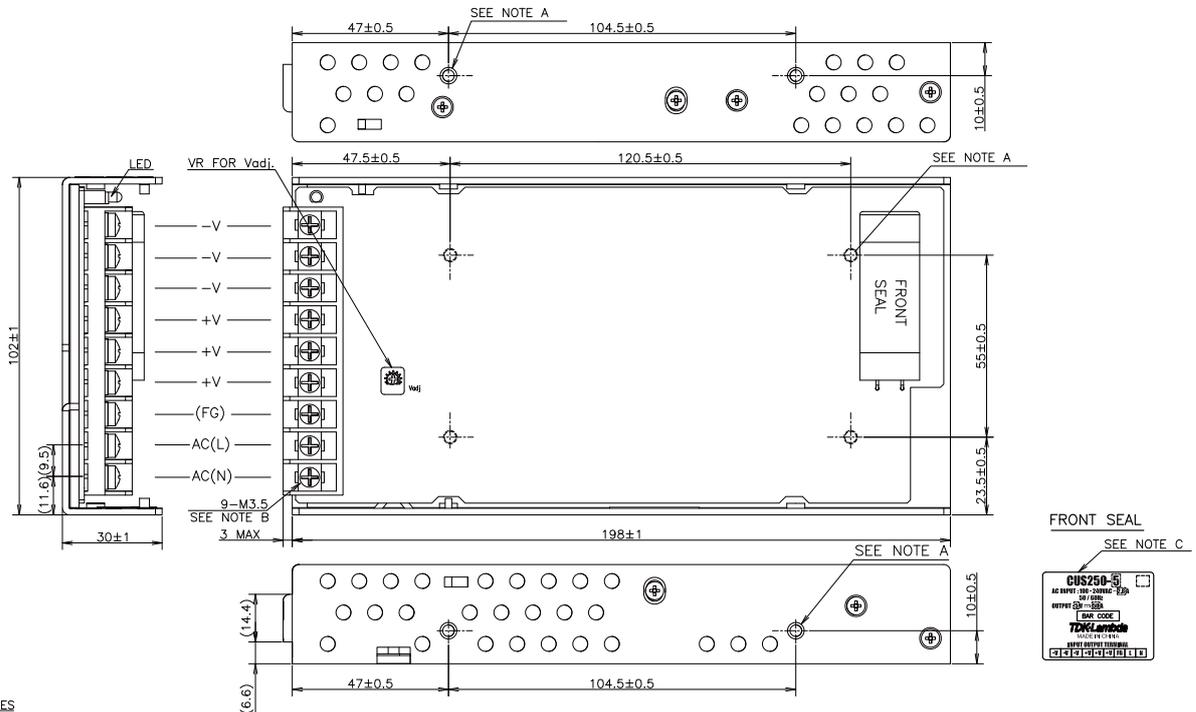


NOTES



- A: M3.5 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (8) FOR CUSTOMER CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6mm.
- B: RECOMMENDED SCREW TORQUE (M3.5 SCREW) < 0.75N·m
- C: MODEL NAME, MAXIMUM OUTPUT POWER, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT, ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.

CS250 OUTPUT DERATING

OUTPUT DERATING VS AMBIENT TEMPERATURE

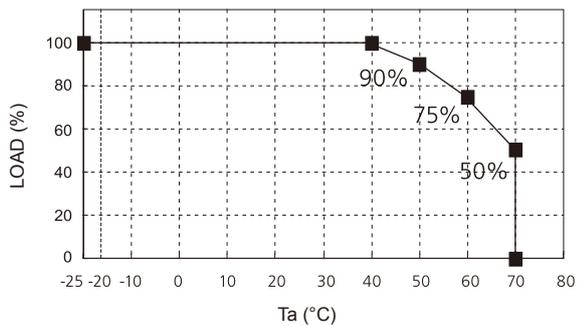

OUTPUT DERATING VS INPUT VOLTAGE ■ CUS250-3, ▲ CUS250-4, 5, 12, 24

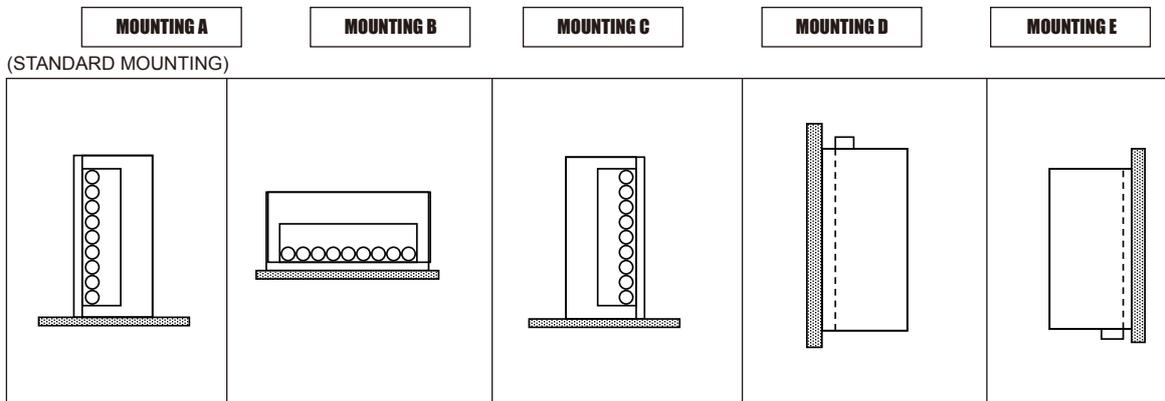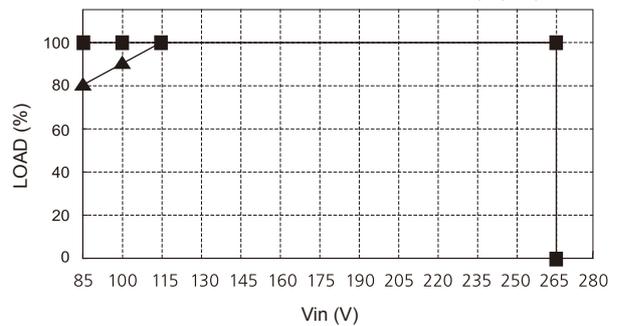

Service network

<http://www.cn.tdk-lambda.com>

TDK-Lambda Corporation

1-13-1 Nihonbashi, Chuo-ku, Tokyo 103-0027 Japan

China Sales Contact

- **Beijing Branch of Wuxi TDK-Lambda Electronics Co.,Ltd.**

Room 12B11-12B12, Unit 7 Dacheng Square, No.28 Xuanwumenxi Street, Xuanwu District, Beijing 100053
TEL: +86-10-63104872
FAX: +86-10-63104874
E-Mail: sales-bj@cn.tdk-lambda.com

- **TDK-Lambda Corporation Hong Kong Office**

1/F, SAE Technology Centre, 6 Science Park East Avenue, Hong Kong Science Park, Shatin, NT., Hong Kong
TEL: +852-23766658
FAX: +852-23172150
E-Mail: sales-hk@hk.tdk-lambda.com

- **Shanghai Branch of Wuxi TDK-Lambda Electronics Co.,Ltd.**

28th Floor Building A, ICE Plaza, No. 418 Guiping Road, Cao He Jing Hi-Tech Park, Shanghai 200233, China
TEL: +86-21-64850777
FAX: +86-21-64850666
E-Mail: sales-sh@cn.tdk-lambda.com

- **Shenzhen Branch of Wuxi TDK-Lambda Electronics Co.,Ltd.**

Room 4302, Excellence Times Square Building, 4068 Yi Tian Road, Futian District, Shenzhen City, Guangdong 518048
TEL: +86-755-83588261
FAX: +86-755-83588260
E-Mail: sales-sz@cn.tdk-lambda.com

- **Wuxi TDK-Lambda Electronics Co.,Ltd.**

No.6, Xing Chuang Er Lu, Wuxi-Singapore Industrial Park, Wuxi City, Jiangsu 214028
TEL: +86-510-85281029
FAX: +86-510-85282585
E-Mail: sales-wx@cn.tdk-lambda.com

- **Chengdu Branch of Wuxi TDK-Lambda Electronics Co.,Ltd.**

Room 816, Building B, High-Tech International Plaza, No.20 TianFu Avenue, Chengdu City, Sichuan 610041
TEL: +86-28-85311929
FAX: +86-28-85311150
E-Mail: sales-cd@cn.tdk-lambda.com

Factory

- **Wuxi TDK-Lambda Electronics Co.,Ltd.**

No.6, Xing Chuang Er Lu, Wuxi-Singapore Industrial Park, Wuxi City, Jiangsu 214028
TEL: +86-510-85281029
FAX: +86-510-85282585

Research&Development Center

- **Shanghai Branch of Wuxi TDK-Lambda Electronics Co.,Ltd.**

28F, Xingyuan Technology Building, No.418 Guiping Road, Cao He Jing Hi-Tech Park, Shanghai 200233
TEL: +86-21-64850777
FAX: +86-21-64850666
E-Mail: tech-support@cn.tdk-lambda.com

TDK logo is a trademark or registered trademark of TDK Corporation