




**Part Number :** [5047541120](#)  
**Product Description :** 0.30mm Pitch Easy-On Back Flip FPC Connector, LA75 Series, Right-Angle, Surface Mount, Dual Contact Style, 0.75mm Height, 11 Circuits  
**Series Number :** 504754  
**Status :** Active  
**Product Category :** FFC / FPC Connectors

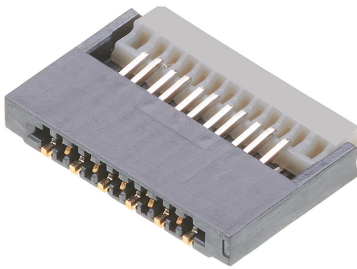

## Documents & Resources


**Drawings**  
[5047541120\\_sd.pdf](#)

**3D Models and Design Files**  
[5047541120\\_stp.zip](#)

**Specifications**  
[AS-504754-002-001.pdf](#)  
[5047549200-200.pdf](#)  
[PS-504754-002-001.pdf](#)

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)7663-DC (21 Jan 2025)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements  
- Eu RoHS  
- REACH SVHC  
- Low-Halogen

Multiple Part Industry Compliance Documents  
- IPC 1752A Class C

- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	FFC / FPC Connectors
Series	504754
Description	0.30mm Pitch Easy-On Back Flip FPC Connector, LA75 Series, Right-Angle, Surface Mount, Dual Contact Style, 0.75mm Height, 11 Circuits
Series Name	LA75
Product Name	Easy-On
UPC	889056000253

#### Electrical

Current - Maximum per Contact	0.3A
Voltage - Maximum	50V

#### Physical

Actuator Type	Back Flip
Circuits (Loaded)	11
Circuits (maximum)	11
Color - Resin	Black
Contact Position	Dual
Durability (mating cycles max)	10
Mated Height	0.75mm
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	Liquid Crystal Polymer
Net Weight	16.367/mg

Orientation	Right Angle
Packaging Type	Embossed Tape on Reel
PCB Locator	No
PCB Mounting	Surface Mount
PCB Retention	None
Pitch - Mating Interface	0.30mm
Pitch - Termination Interface	0.30mm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-40° to +105°C
Wire/Cable Type	FPC only