

SUREFIT™ VISOR CARRIER WITH ACETATE VISOR

Visor Carrier For EVO® Range Helmets (Micro and Std Peak) Fits Inter and Sonis® Helmet Mounted Ear Defender

PRODUCT CODE: ANNO14-521-300

Offers Protection Against Low Energy High-Speed Particles At 45 m/s (100mph) and Liquid Droplets

TECHNICAL SPECIFICATION

HEAD PROTECTION

ACCESSORIES

INSTRUCTIONS FOR USE

In use ensure that the faceshield fits comfortably and securely on the head

Ensure that a suitable visor has been fitted with the protective film removed from it

Ensure the visor is in place before entering the hazard area

VISOR PERFORMANCE

Offers protection against low energy high-speed particles at 45 m/s (100mph), liquid droplets

The optical qualities of the visor comply with the requirements of optical class 1 (highest)

DIMENSIONS OF VISOR CARRIER & VISOR

Length: 300mm

Width: 245mm

Height: 168mm


Thickness: 1mm

Weight: 202g (Approx.)

DIMENSIONS OF OUTER PACKAGING

Quantity: 10

Weight: TBDg (Approx.)

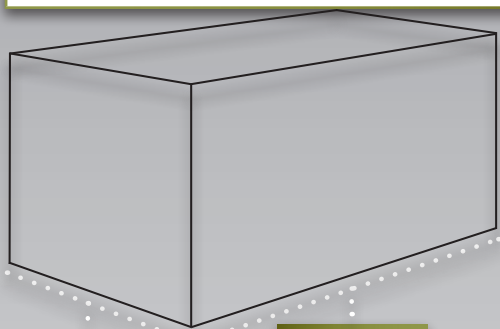

WIDTH:
335mm

LENGTH:
430mm

HEIGHT:
290mm

CLEANING & MAINTENANCE

The unit may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

Store out of direct sunlight away from chemicals and extremes of temperature

VISOR CARRIER:
ABS

VISOR:
Acetate



AVAILABLE FOR



LIMITATIONS OF USE

Protection will only be offered if the visor carrier and a visor are fitted correctly to a suitable Industrial Safety Helmet with the helmet attachment kit

Visors and carriers should be replaced if they become scratched, damaged, or are subjected to liquid splash

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The Industrial Safety Helmet harness, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the visor and Helmet and seek medical advice

Not suitable for use with all chemicals - if you are unsure contact your supplier or JSP for help and advice

CONFORMITY

Meets the requirements of EN166

EU Type Examination Certificate Number 682750, issued by BSI Product Certification

Markings: EN166 1.F.3.

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jsp-safety.co.uk.



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM



UKSALES@JSPSAFETY.COM
TEL: +44 (0)1993 826050

