



Heat sink Details for LS160

Tel: 0121 789 8686


Email: heatsinks@ablcomponents.co.uk

This heatsink is suitable
for use with device(s):
TO220, TO126


Thermal Performance:
14.00 °C/W


Stock Category:
A

(click [here](#) for category definition)



All machining
and finishing
in house

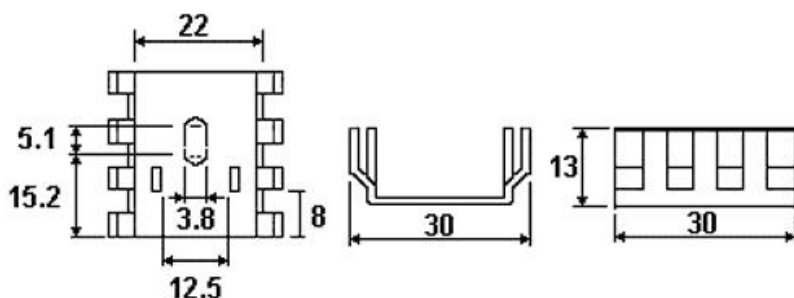

DEVICE MAY BE FITTED WITH SCREW OR CLIP  (CLIP 04)

Where a device is shown it is for illustrative purposes only. The heat sink is supplied without device. All ABL heatsinks are normally supplied black anodised to assist thermal performance.

Thermal Resistance is calculated based on a distributed heat load on anodised heatsink with vertically mounted fins based on a 60°C temperature rise. Under general operating conditions the thermal mounting arrangement of devices is not known and therefore the figures should be used only as a guide to selection. We recommend that the effectiveness of any heat sink is tested in the specific operating environment in which it will be subjected. All information is for reference purposes only.