

FEATURES

- Hexagonal threaded standoff
- Nylon construction for durability
- Male-female configuration with M3 threading on both sides
- Length of 30 mm
- Height of 30 mm
- Bolt length of 8 mm
- Conforms to ANSI/ESD S20.20:2014 and BS EN 61340-5-1:2007 Electrostatic Control Standard

HEX. THREADSPACER 6IO/30

RS Stock No.: 102-6558



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

This threaded standoff is a simple solution to raise and securely lock PCBs (printed circuit boards) above a surface. Acting as an insulating guard between components to prevent electrical shorts, the standoff performs the function of a spacer in electronic components.

General Specifications

Gender Type	Male/Female
Material	Nylon
Body Shape	Hex
Application	Insulating guard between components to prevent electrical shorts

Mechanical Specifications


Body Length	30mm
Thread Size	M3

Approvals

Compliance/Certifications	ANSI/ESD S20.20:2014 and BS EN 61340-5-1:2007
---------------------------	---




Dimensions:

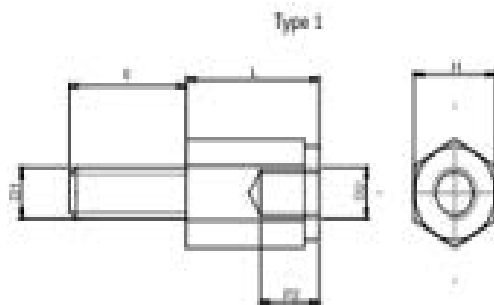

Type 1 Female/Male

Part Number	Thread "D1 & D2"	Dimensions (mm)			Std Pack Qty
		"L"	"H"	"D2"	
HNSM2-5-5-5-2	M2.5	5	5	3	500
HNSM2-5-6-5-2	M2.5	6	5	3	500
HNSM2-5-10-5-2	M2.5	10	5	3	500
HNSM2-5-12-5-2	M2.5	12	5	3	500
HNSM2-5-15-5-2	M2.5	15	5	3	500
HNSM2-5-18-5-2	M2.5	18	5	3	500
HNSM2-5-20-5-2	M2.5	20	5	3	500
HNSM2-5-25-5-2	M2.5	25	5	3	500
HTSM-M3-5-5-2	M3	5	5.5	3	500
HTSM-M3-6-5-2	M3	6	5.5	3	500
HNSM3-10-5-5-2	M3	10	5.5	3	500
HNSM3-12-5-5-2	M3	12	5.5	3	500
HNSM3-15-5-5-2	M3	15	5.5	3	500
HNSM3-18-5-5-2	M3	18	5.5	3	500
HNSM3-20-5-5-2	M3	20	5.5	3	500
HNSM3-25-5-5-2	M3	25	5.5	3	500
HNSM3-30-5-5-2	M3	30	5.5	3	500
HNSM3-35-5-5-2	M3	35	5.5	3	500
HTSM-M3-5-6-2	M3	5	6	3	500
HTSM-M3-6-6-2	M3	6	6	3	500
HTSM-M3-10-6-2	M3	10	6	3	500
HTSM-M3-12-6-2	M3	12	6	3	500
HTSM-M3-15-6-2	M3	15	6	3	500
HTSM-M3-18-6-2	M3	18	6	3	500
HTSM-M3-20-6-2	M3	20	6	3	500
HTSM-M3-25-6-2	M3	25	6	3	500
HTSM-M3-30-6-2	M3	30	6	3	500
HTSM-M3-35-6-2	M3	35	6	3	500
HTSM-M3-40-6-2	M3	40	6	3	500
HTSM-M3-45-6-2	M3	45	6	3	500
HTSM-M3-50-6-2	M3	50	6	3	500
HTSM-M3-55-6-2	M3	55	6	3	500
HTSM-M3-60-6-2	M3	60	6	3	500
HTSM-M3-65-6-2	M3	65	6	3	500
HTSM-M3-70-6-2	M3	70	6	3	500
HTSM-M3-75-6-2	M3	75	6	3	500
HTSM-M3-80-6-2	M3	80	6	3	500
HTSM-M3-85-6-2	M3	85	6	3	500
HTSM-M3-90-6-2	M3	90	6	3	500
HTSM-M3-95-6-2	M3	95	6	3	500
HTSM-M3-100-6-2	M3	100	6	3	500
HTSM-M4-5-6-2	M4	5	6	3	500
HTSM-M4-6-6-2	M4	6	6	3	500
HTSM-M4-10-6-2	M4	10	6	3	500
HTSM-M4-12-6-2	M4	12	6	3	500
HTSM-M4-15-6-2	M4	15	6	3	500
HTSM-M4-18-6-2	M4	18	6	3	500
HTSM-M4-20-6-2	M4	20	6	3	500
HTSM-M4-25-6-2	M4	25	6	3	500
HTSM-M4-30-6-2	M4	30	6	3	500
HTSM-M4-35-6-2	M4	35	6	3	500
HTSM-M4-40-6-2	M4	40	6	3	500
HTSM-M5-10-10-2	M5	10	10	3	500
HTSM-M5-12-10-2	M5	12	10	3	500
HTSM-M5-15-10-2	M5	15	10	3	500
HTSM-M5-18-10-2	M5	18	10	3	500
HTSM-M5-20-10-2	M5	20	10	3	500
HTSM-M5-25-10-2	M5	25	10	3	500
HTSM-M5-30-10-2	M5	30	10	3	500
HTSM-M5-35-10-2	M5	35	10	3	500
HTSM-M5-40-10-2	M5	40	10	3	500

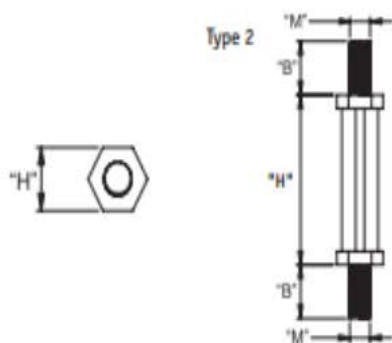

Type 2 Male/Male

Part Number	Thread *M*	Dimensions (mm)			Std Pack Qty
		L	*H*	*B*	
HTSN-M2.5-5-3	M2.5	5	5	6	500
HTSN-M2.5-8-3	M2.5	8	5	6	500
HTSN-M2.5-10-3	M2.5	10	5	6	500
HTSN-M2.5-12-3	M2.5	12	5	6	500
HTSN-M2.5-15-3	M2.5	15	5	6	500
HTSN-M2.5-18-3	M2.5	18	5	6	500
HTSN-M2.5-20-3	M2.5	20	5	6	500
HTSN-M2.5-25-3	M2.5	25	5	6	500
HTSN-M3-5-3	M3	5	6	6	500
HTSN-M3-8-3	M3	8	6	6	500
HTSN-M3-10-3	M3	10	6	6	500
HTSN-M3-12-3	M3	12	6	6	500
HTSN-M3-15-3	M3	15	6	6	500
HTSN-M3-18-3	M3	18	6	6	500
HTSN-M3-20-3	M3	20	6	6	500
HTSN-M3-25-3	M3	25	6	6	500
HTSN-M3-30-3	M3	30	6	6	500
HTSN-M3-35-3	M3	35	6	6	500
HTSN-M4-5-3	M4	5	6	6.4	500
HTSN-M4-8-3	M4	8	6	6.4	500
HTSN-M4-10-3	M4	10	6	6.4	500
HTSN-M4-12-3	M4	12	6	6.4	500
HTSN-M4-15-3	M4	15	6	6.4	500
HTSN-M4-18-3	M4	18	6	6.4	500
HTSN-M4-20-3	M4	20	6	6.4	500
HTSN-M4-25-3	M4	25	6	6.4	500
HTSN-M4-30-3	M4	30	6	6.4	500
HTSN-M4-35-3	M4	35	6	6.4	500
HTSN-M4-40-3	M4	40	6	6.4	500