

LED T8 Sensor Standby 1500 G13 22W (58W) 2640lm 840 EM+AC

Article number: 145870

BAI Ecoplus T8 Sensor Standby LED Tube 29x1500mm G13 22W (58W) 2640lm 4000K CRI80 Glass EM Retrofit + AC 230V-240V 280° Temp. -20°C +40°C Alt T26 TLD Lumilux LED-lamp

LED Ecoplus T8 tube with a G13 fitting and motion sensor. After detection, the lamp lights up to 100%. After one minute without detection, the LED tube switches back to standby mode (= approx. 20% lumen output). Disconnecting magnetic ballast is optional, not necessary. Not suitable for series connection. 5.8GHz microwave sensor. Detection range Max. 5m. Replace the fluorescent starter with the LED starter (supplied). Ambient temperature range: -20°C to +50°C.







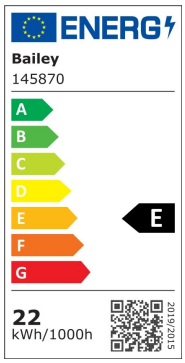

General ETIM properties

ETIM group	Lamps
ETIM class	LED-lamp/Multi-LED
Name	LED T8 Sensor Standby 1500 G13 22W (58W) 2640lm 840 EM+AC
Brand	Bailey
Productseries	Ecoplus LED tube sensor
Producttype	T8 1500 840

All rights reserved. We reserve the right to change designs and technical specifications of our products.s

LED T8 Sensor Standby 1500 G13 22W (58W) 2640lm 840 EM+AC

Article number: 145870

ETIM specifications

Socket	G13
Luminous flux [lm]	2640 - 2640
Nominal voltage [V]	220 - 240
Lamp power [W]	22 - 22
Colour temperature [K]	4000 - 4000
Diameter [mm]	29
Length [mm]	1500
Dimmable	No
Lamp shape	Tube, double-ended
Beam angle [°]	280 - 280
Colour	White
Type of glass/cover	Opal
Lamp designation	T8
Colour rendering index CRI	80-89
Voltage type	AC
Filament lamp	No
Rated luminous flux according to IEC 62612 [lm]	2640
Power factor	0.9
Lamp efficacy [lm/W]	120
Nominal current [mA]	110 - 110
Colour of light according to EN 12464-1	Neutral white 3300-5300 K
Housing colour	White
Average nominal lifetime [h]	30000
Degree of protection (IP)	IP20
Colour consistency (McAdam ellipse)	SDCM6
Min. number of switching cycles	15000
Weighted energy consumption in 1000 hours [kWh]	22
Remote operation possible	No
With movement sensor	Yes
With remote control	No
Photobiological safety according to EN 62471	RG1
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No
IFTTT support available	No
Suitable for electronic ballast	No
Suitable for magnetic ballast	Yes
Dimming phase cut-off (trailing edge)	No
Dimming phase cut-on (leading edge)	No
Dimming Touch and Dim	No
Dimming Zigbee	No

All rights reserved. We reserve the right to change designs and technical specifications of our products.s

Dimming Bluetooth	No
Dimming Wi-Fi	No
Energy efficiency class according to EU regulation 2019/2015	E
With twilight switch	No
Material of light bulb	Glass

Complementary articles



145098

LED Tube Fixture T8 1x 1500 G13 IP20



146962

Relamp LED T8 Tube Batten 1x 1500 G13 IP65 IK10

All rights reserved. We reserve the right to change designs and technical specifications of our products.s