
PTi 20/220...240 I/2P-01

POWERTRONIC INTELLIGENT PTi I | ECG for HID lamps, with cable clamp

Areas of application

- Shop lighting
- Health and fitness areas (in dry, corrosion-protected place)
- Effect and accent lighting



Product benefits

- Extended terminal section enables mains looping
- Screw-down cable clamps for reliable strain relief
- Long reliable life at maximum permitted temperatures
- Automatic safety shutdown of lamps in the event of a defect or at end of life (EoL)

Product features

- Energy Efficiency Index EEI: A2
- Supply voltage: 220...240 V
- Line frequency: 50...60 Hz
- RI suppression: to EN 55015/CISPR 15
- Safety: to EN 61347-2-12
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547

Product datasheet

Technical data

Electrical data

Lamp wattage	20 W
Line current	0.11 A ¹⁾
Ignition voltage	3.0 kVp
Operating frequency	0.100...0.120 kHz
System wattage	23.00 W
ECG efficiency	87 %
Input voltage AC	220...240 V
Input voltage range	198...264 V
Mains frequency	50...60 Hz
Power factor λ	0.95 ²⁾
Inrush current	12 A ³⁾
Max. no. of ECGs on circuit breaker 10 A	22 ⁴⁾
Max. no. of ECGs on circuit breaker 16 A	33 ⁴⁾
Max. no. of ECGs on 16A MCB with EBN-OS	82 ⁴⁾
Maximum current for mains looping	16 A
Protective conductor current	0.2 mA
U-OUT (working voltage)	250 V
Max. working voltage between LH and LL	250 V
Max. working voltage betw. LL/LH & earth	250 V
Max. capacitance of wire ECG/lamp	120 pF


1) At 230 V_{AC}

2) Minimum

3) $t_{width} = 210 \mu s$ (measured at 50 % I_{peak})

4) Type B

Dimensions & weight



Length	204.0 mm
--------	----------

Product datasheet

Width	50.0 mm
Height	32.0 mm
Mounting hole spacing, length	186.5 mm
Cable cross-section, input side	1.5 mm ²
Cable cross-section, output side	1.5 mm ²
Product weight	580.00 g

Colors & materials

Casing material	Plastic
-----------------	---------

Temperatures

Ambient temperature range	-25...+60 °C
Maximum temperature at tc test point	75 °C

Lifespan

ECG lifetime	50000 h ¹⁾
--------------	-----------------------

¹⁾ At maximum T_c / 10 % failure rate

Additional product data

Design / version	With cable clamp / Prewired / Connector
------------------	---

Capabilities

Max. cable length to lamp/LED module	1.5 m
Overheating protection	Switch off at T > 75 °C at the tc point
ECG reset time	> 0.5 s
Cable/wire types, input side	H05VV-F 3x1.5 mm ²
Cable/wire types, output side	H05Z1Z1-F 3x1.5 mm ² ¹⁾
Dimmable	No
Mains terminals	CEE 7/4 ²⁾
Secondary terminals	ST 18 ³⁾
Restriction on ignition time	20 min
Suitable for fixtures with prot. class	I

¹⁾ Halogen free

²⁾ 2.5 m cable

³⁾ 0.5 m halogen free cable

Certificates & standards


Approval marks – approval	ENEC 10 / VDE / VDE-EMC / GOST / C-Tick
Type of protection	IP20
EEI – Energy Label	A2

Product datasheet

Standards

Acc. to EN 61347-2-12/Acc. to EN 55015/Acc. to EN 61000-3-2/Acc. to EN 61547/Acc. to EN 62493

Wiring Diagram

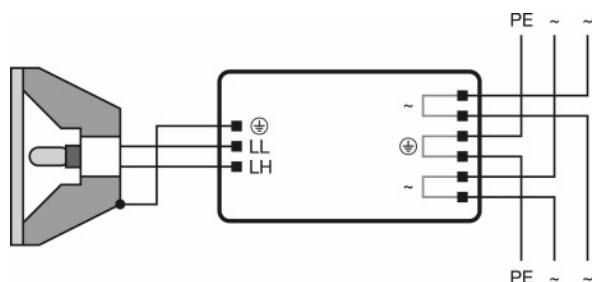

Wiring diagram




Thermal characteristics

Ballast losses and lamp heat radiation can lead to heat accumulation in a completely closed case. Therefore it is necessary to ensure that the temperature at the measuring point t_c of the ECG does not exceed the maximum value.








Attention!

For safety reasons disconnect the device before replacing the lamp!

Download Data

File	
	Tender Documents Tender Document for POWERTRONIC EVG.eng
	Certificates EMC-Marks approval
	Certificates PTi - PTo - PTg VDE-ENEC-Cert

Product datasheet

	Declarations of conformity Declaration of conformity PTi 20
	Declarations of conformity VDE Declaration of conformity
	Installation/Operation notice Technical guide - POWERTRONIC for HID-lamps (GB)
	CAD data 3-dim PTi 20 I
	CAD data 3-dim PTi 20 I
	CAD data 3-dim PTi 20 I
	CAD data PDF PTi 20 I

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321672513	PTi 20/220...240 I/2P-01	Shipping carton box 12	410 mm x 270 mm x 260 mm	28.78 dm ³	7498.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.