






LV HRC fuse element, NH000, In: 40 A, gG, Un AC: 500 V, Un DC: 250 V, Combined indicator, live grip lugs



Model	
Product brand name	SETRON
Product designation	LV HRC fuse link
Design of the product	With blade contacts
Design of an identification indicator	Combination alarms
Design of the switching contact	Non-corroding, silver-plated
Design of the fuse link	LV HRC fuse link
General technical data	
Size of fuse system / acc. to DIN EN 60269-1	NH000
Operating class of the fuse link	gG
circuit-breaker / Design	3NA7
Type of voltage	AC/DC
Current / at AC / rated value	40 A
Supply voltage	
• at AC / rated value	500 V
• at DC	250 V
Protection class	
Protection class IP	IP20, with connected conductors

Switching capacity	
Switching capacity current	
<ul style="list-style-type: none"> • at DC / acc. to IEC 60947-2 / rated value 	25 kA
<ul style="list-style-type: none"> • acc. to IEC 60947-2 / rated value 	120 kA
Dissipation	
Power loss [W]	3.1 W
Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	3.1 W
Current	
Tripping residual / rated value / derated current / at 40 Cel	38 A
Diken-export / Let-through energy	DE_3NA_00_500_gG_40
Mechanical Design	
Width	
<ul style="list-style-type: none"> • of the enclosure 	21 mm
Mounting position	Any, preferably vertical
Net weight	129 g
Environmental conditions	
Ambient temperature	
<ul style="list-style-type: none"> • minimum 	-5 °C
<ul style="list-style-type: none"> • maximum 	40 °C
Ambient temperature / during storage	Air humidity 90% at 20 °C
Environmental category	-20 to +50 at 95% relative humidity
Certificates	
Reference code	
<ul style="list-style-type: none"> • acc. to DIN EN 61346-2 	F
<ul style="list-style-type: none"> • acc. to DIN EN 81346-2 	F

General Product Approval			Declaration of Conformity	Test Certificates	
 CSA	 KEMA	 VDE	 EG-Konf.	Type Test Certificates/Test Report	Special Test Certificate

Test Certificates	Shipping Approval	other
Miscellaneous	 GL	Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NA7817>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NA7817>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA7817

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

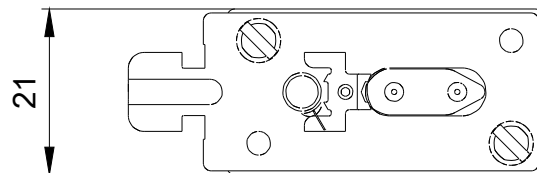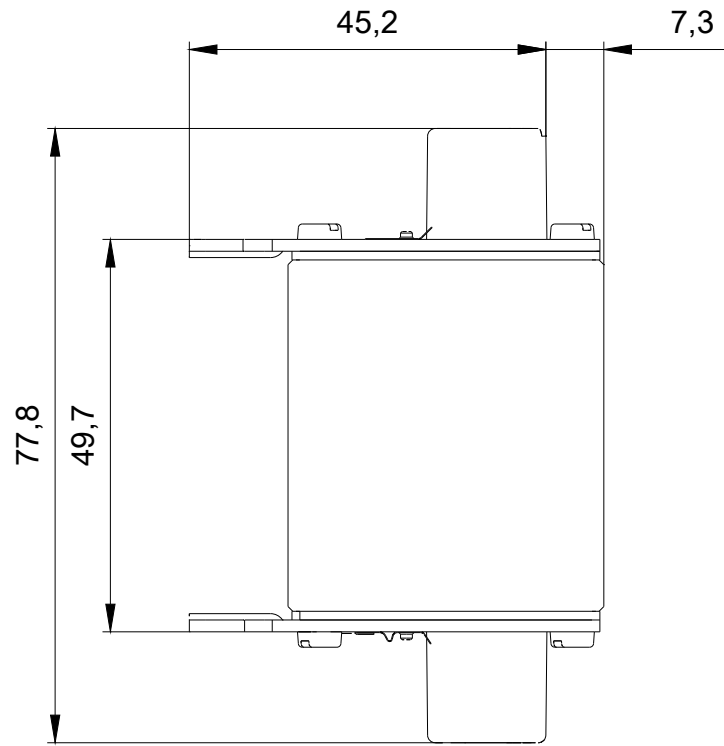

1

-F1



2

