

Surface Mount Fuse, 7 x 2 mm, Quick-Acting F, 125 VAC, 125 VDC



UL 248-14 · 125VAC · 125VDC · Quick-Acting F



### Description

- High breaking capacity
- Directly solderable on printed circuit boards

### Standards

- UL 248-14
- CSA C22.2 no. 248.14

### Approvals

- UL File Number: E42088
- CSA File Number: 34549

### Applications

- Telecom
- Industrial electronic
- Household appliances

### References

[Packaging Details](#)


Square Footprint Type [MKF](#)

Corresponding Fuseholder [231786](#); [231787](#)

### Weblinks


[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)


### Technical Data

Rated Voltage	63 - 125VAC, 65 - 125VDC
Rated current	0.063 - 15 A
Breaking Capacity	300A
Characteristic	Quick-Acting F
Mounting	PCB,SMT
Admissible Ambient Air Temp.	-55 °C to 125 °C
Climatic Category	55/125/56 acc. to IEC 60068-1
Material: Tube	Ceramic
Material: Endcaps	Tin-Plated Copper Alloy
Unit Weight	0.07 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 , Rated current

Soldering Methods	Reflow, Wave
Solderability	235 °C / 2 sec acc. to IEC 60068-2-58, Test Td, Fig. 2B (Reflow) // 245 °C / 3 sec (Wave)
Resistance to Soldering Heat	260 °C / 10 sec acc. to IEC 60068-2-58, Test Td

### Dimension

 7 mm




Soldering pads

### Pre-Arcing Time

Rated Current In	1.0 x In min.	2.0 x In max.	2.75 x In max.	4.0 x In max.	10.0 x In max.
0.063 A - 0.75 A	4 h	5 s	300 ms	30 ms	5 ms
1 A - 15 A	4 h	10 s	-	60 ms	5 ms

Time-Current-Curves

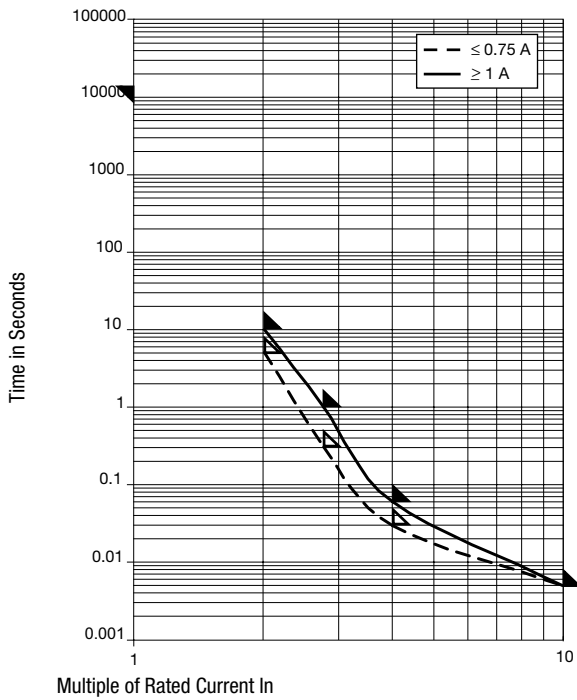

All Variants

Rated Current [A]	Rated Voltage [VAC]	Rated Voltage [VDC]	Breaking Capacity	Voltage Drop 1.0 I <sub>n</sub> typ. [mV]	Power Dissipation 1.0 I <sub>n</sub> typ. [mW]	Melting I <sup>2</sup> t 10.0 Intyp. [A <sup>2</sup> s]	Order Number
0.063	125	125	1)	590	37	0.00022	● 7010.9750.xx
0.125	125	125	1)	640	80	0.0024	● 7010.9760.xx
0.25	125	125	1)	275	69	0.0061	● 7010.9770.xx
0.375	125	125	1)	215	81	0.012	● 7010.9780.xx
0.5	125	125	1)	205	103	0.046	● 7010.9790.xx
0.75	125	125	1)	190	143	0.09	● 7010.9800.xx
1	125	125	1)	180	180	0.11	● 7010.9810.xx
1.5	125	125	1)	185	278	0.25	● 7010.9820.xx
2	125	125	1)	160	320	0.72	● 7010.9830.xx
2.5	125	125	1)	160	400	0.91	● 7010.9840.xx
3	125	125	1)	155	465	1.3	● 7010.9850.xx
3.5	125	125	1)	145	510	1.7	● 7010.9860.xx
4	125	125	1)	140	560	2.6	● 7010.9870.xx
5	63	125	2)	125	625	4	● 7010.9880.xx
7	63	125	2)	120	840	8.5	● 7010.9890.xx
10	65	65	3)	110	1100	31	● 7010.9892.xx
12	65	65	3)	115	1380	48	● 7010.9894.xx
15	65	65	3)	105	1575	92	● 7010.9896.xx

Most Popular:

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 300 A @ 125 VAC , p.f. ≥ 0.95 / 300 A @ 125 VDC

2) 300 A @ 63 VAC , p.f. ≥ 0.95 / 300 A @ 125 VDC

3) 300 A @ 65 VAC , p.f. ≥ 0.95 / 300 A @ 65 VDC

Packaging Unit

.xx = .63 Plastic Bag (100 pcs.)

.xx = .57 Blister Tape 18 cm Reel (1500 pcs.)