


https://www.phoenixcontact.com/gb/products/3240062



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.





### Your advantages

- · Electrogalvanized
- · Hard-soldered crimping zone for maximum conductor pull-out forces in connection with CRIMPFOX RCI... pliers
- · Halogen-free
- · Conductor protection against pushing through

#### Commercial data

| Item number                          | 3240062             |
|--------------------------------------|---------------------|
| Packing unit                         | 50 pc               |
| Minimum order quantity               | 50 pc               |
| Sales key                            | BH34V1              |
| Product key                          | BH34V1              |
| Catalog page                         | Page 501 (C-3-2019) |
| GTIN                                 | 4046356452809       |
| Weight per piece (including packing) | 1.415 g             |
| Weight per piece (excluding packing) | 1.38 g              |
| Customs tariff number                | 85369010            |
| Country of origin                    | CN                  |

3240062

https://www.phoenixcontact.com/gb/products/3240062



#### Technical data

#### Product properties

| Product type     | Connector   |
|------------------|---|
| Product property | Halogen-free                                      |
|                  | With "Easy Entry" system                          |
|                  | With conductor protection against pushing through |
|                  | PA-insulated                                      |

#### **Dimensions**

| Dimensional drawing                       |         |
|---|---------|
| Sleeve length                             | 25.5 mm |
| Maximum stripping length                  | 8 mm    |
| Min. material thickness                   | 0.8 mm  |
| Inner dimensions of the insulating collar | 4.5 mm  |

#### Material specifications

| Color                                  | blue (RAL 5015)   |
|--|-------------------|
| Material                               | Cu                |
| Flammability rating according to UL 94 | V2                |
| Coating                                | electrogalvanized |
| Insulating material                    | PA                |
| Components                             | halogen-free      |

#### Mechanical properties

| Tec | hnica | l data |
|-----|-------|--------|

| Sleeve length | 25.5 mm |
|---------------|---------|
|---------------|---------|

#### Environmental and real-life conditions

#### Ambient conditions

| Ambient temperature (operation) | -20 °C 105 °C |
|---------------------------------|---------------|
| Permanent temperature           | 105 °C        |
| Short-term temperature          | 120 °C        |


3240062

https://www.phoenixcontact.com/gb/products/3240062



### Drawings

#### Dimensional drawing

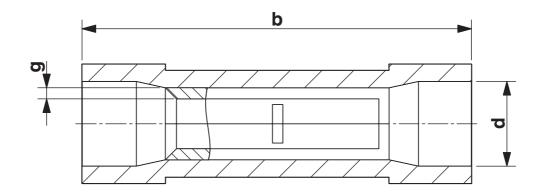



https://www.phoenixcontact.com/gb/products/3240062



### Classifications

| _ |          |             |
|---|----------|-------------|
| _ | $\sim$ 1 | $\Delta SS$ |
| _ |          | A. >. >     |

|        | ECLASS-13.0 | 27400204 |  |  |
|--------|-------------|----------|--|--|
| ETIM   |             |          |  |  |
|        | ETIM 9.0    | EC001052 |  |  |
| UNSPSC |             |          |  |  |
|        | UNSPSC 21.0 | 27121700 |  |  |



https://www.phoenixcontact.com/gb/products/3240062



### Environmental product compliance

#### EU RoHS

| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |  |
|---|--|--|
| China RoHS                              |  |  |
| Environment friendly use period (EFUP)  | EFUP-E                                   |  |
|   | No hazardous substances above the limits |  |
| EU REACH SVHC                           |  |  |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |  |

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT Ltd Halesfield 13, Telford Shropshire, TF7 4PG 01952 681700 info@phoenixcontact.co.uk