



Figure similar

TIME RELAY, ON-DELAY, 2C, 15 RANGES
(1,3,10,30,100) (S,MIN,H) AC 24,200...240 V AND DC
24 V, WITH LED

General technical data:

product brand name		SIRIUS
Product designation		timing relay
mounting position		any
Product function non-volatile		No
Product component		Yes
• Relay output		No
• semi-conductor output		No
Installation altitude at height above sea level maximum	m	2 000
Ambient temperature		
• during operation	°C	-25 ... +60
• during storage	°C	-40 ... +85
• during transport	°C	-40 ... +85
Relative humidity during operation	%	10 ... 95
EMC emitted interference acc. to IEC 61812-1		EN 61000-6-4(3)
EMI immunity acc. to IEC 61812-1		EN 61000-6-2
Conducted interference due to burst acc. to IEC 61000-4-4		2 kV network connection / 1 kV control connection
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5		2 kV
Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5		1 kV
Electrostatic discharge acc. to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling acc. to IEC 61000-4-3		10 V/m
Surge voltage resistance Rated value	V	4 000

Active power loss total typical	W	2
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		K
Equipment marking acc. to DIN EN 81346-2		K
Category acc. to EN 954-1		none
Protection against electrical shock		finger-safe
Protection class IP		IP20
Mechanical service life (switching cycles) typical		10 000 000
Electrical endurance (switching cycles) at AC-15 at 230 V typical		100 000
Operating frequency with 3RT2 contactor maximum	1/h	5 000
Shock resistance acc. to IEC 60068-2-27		11g / 15 ms
Relative repeat accuracy	%	1
Recovery time	ms	150
Degree of pollution		3
Insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 Rated value	V	300
Relative setting accuracy relating to full-scale value	%	5

Switching Function:

Switching function		
• ON-delay		Yes
• ON-delay/instantaneous contact		No
• passing make contact		No
• passing make contact/instantaneous contact		No
• OFF delay		No
• flashing asymmetrically starting with interval		No
• flashing asymmetrically starting with pulse		No
• flashing symmetrically starting with pulse		No
• flashing symmetrically starting with pulse/instantaneous		No
• flashing symmetrically starting with interval		No
• flashing symmetrically starting with interval/instantaneous		No
• star-delta circuit		No
• star-delta circuit with delay time		No
Switching function with control signal		
• additive ON delay		No
• passing break contact		No
• OFF delay		No
• pulse-shaping		No
• OFF delay/instantaneous		No
• ON-delay/OFF-delay/instantaneous		No

<ul style="list-style-type: none"> • passing break contact/instantaneous 		No
<ul style="list-style-type: none"> • additive ON delay/instantaneous 		No
<ul style="list-style-type: none"> • ON-delay/OFF-delay 		No
<ul style="list-style-type: none"> • passing make contact 		No
<ul style="list-style-type: none"> • passing make contact/instantaneous contact 		No
<ul style="list-style-type: none"> • pulse delayed 		No
<ul style="list-style-type: none"> • pulse delayed/instantaneous 		No
<ul style="list-style-type: none"> • pulse-shaping/instantaneous 		No
Switching function of interval relay with control signal		
<ul style="list-style-type: none"> • retrotriggerable with deactivated control signal/instantaneous contact 		No
<ul style="list-style-type: none"> • retrotriggerable with activated control signal 		No
<ul style="list-style-type: none"> • retrotriggerable with activated control signal/instantaneous contact 		No
<ul style="list-style-type: none"> • retriggerable with deactivated control signal 		No

Control circuit/ Control:

Adjustable time	s	0.05 ... 360 000
Type of voltage of the control supply voltage		AC/DC
Control supply voltage frequency 1	Hz	50 ... 60
Control supply voltage frequency 2	Hz	50 ... 60
Control supply voltage 2 with AC		
<ul style="list-style-type: none"> • at 50 Hz 	V	200 ... 240
<ul style="list-style-type: none"> • at 60 Hz 	V	200 ... 240
Operating range factor control supply voltage rated value		
<ul style="list-style-type: none"> • with AC 		
<ul style="list-style-type: none"> — at 50 Hz 		0.85 ... 1.1
<ul style="list-style-type: none"> — at 60 Hz 		0.85 ... 1.1
<ul style="list-style-type: none"> • for DC 		0.85 ... 1.1

Auxiliary circuit:

Contact reliability of the auxiliary contacts		one incorrect switching operation of 100 million switching operations (17 V, 5 mA)
Material of switching contacts		AgSnO ₂
Operating current of the auxiliary contacts		
<ul style="list-style-type: none"> • at AC-15 		
<ul style="list-style-type: none"> — at 24 V 	A	3
<ul style="list-style-type: none"> — at 250 V 	A	3
<ul style="list-style-type: none"> • at DC-13 		
<ul style="list-style-type: none"> — at 24 V 	A	1
<ul style="list-style-type: none"> — at 125 V 	A	0.2
<ul style="list-style-type: none"> — at 250 V 	A	0.1

Design of the fuse link for short-circuit protection of the auxiliary switch required		fuse gL/gG: 4 A
Thermal current	A	5
Number of NC contacts		
• delayed switching		0
• instantaneous contact		0
Number of NO contacts		
• delayed switching		0
• instantaneous contact		0
Number of CO contacts		
• delayed switching		2
• instantaneous contact		0

Installation/ mounting/ dimensions:

Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	22.5
Height	mm	102
Depth	mm	91
Required spacing with side-by-side mounting		
• upwards	mm	0
• forwards	mm	0
• at the side	mm	0
• Backwards	mm	0
• downwards	mm	0
Required spacing for grounded parts		
• Backwards	mm	0
• at the side	mm	0
• upwards	mm	0
• forwards	mm	0
• downwards	mm	0
Required spacing for live parts		
• downwards	mm	0
• Backwards	mm	0
• at the side	mm	0
• forwards	mm	0
• upwards	mm	0

Connections/ Terminals:

Type of electrical connection for auxiliary and control current circuit		screw-type terminals
Type of connectable conductor cross-section		
• solid		1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
• finely stranded		

- with core end processing
- for AWG conductors
 - stranded
 - solid

		1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
		2x (20 ... 14)
		2x (20 ... 14)
Tightening torque	N·m	0.8 ... 1.2

Certificates/ approvals:

General Product Approval	Declaration of Conformity	Test Certificates
--------------------------	---------------------------	-------------------



[Special Test Certificate](#)

Shipping Approval



Shipping Approval	other
-------------------	-------



[Environmental Confirmations](#)

[other](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP15251BP30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RP15251BP30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP15251BP30&lang=en

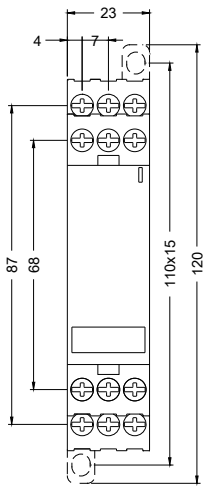

last modified:

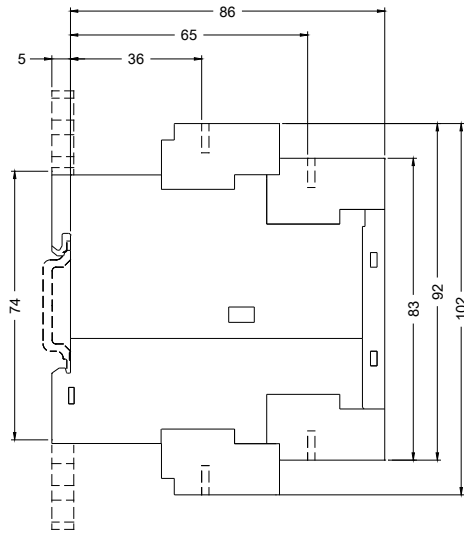

27.04.2015