

## Bus system flat-type plug - SACC-EC-FSD-4CON-M16/0,5 SCO - 1535215


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Bus system flush-type socket, PROFINET, 4-pos., M12-SPEEDCON, D-coded, front/screw mounting with M16 thread, can be positioned, with 0.5 m TPE litz wire, 4 x 0.34 mm<sup>2</sup>



### Key commercial data

Packing unit	1 pc
GTIN	 4 046356 026963
Weight per Piece (excluding packing)	24.7 g
Custom tariff number	85444290
Country of origin	Germany

### Technical data

#### Mechanical characteristics

Standards/specifications	M12 connector IEC 61076-2-101
Number of positions	4
Shielded	No
Insertion/withdrawal cycles	> 100
Connection method	Individual wires
Length of cable	0.5 m

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)
	-25 °C ... 85 °C (cable, flexible installation)
	-40 °C ... 85 °C (cable, fixed installation)
Degree of protection	IP67

#### Material data

Inflammability class according to UL 94	V0
---	----

# Bus system flat-type plug - SACC-EC-FSD-4CON-M16/0,5 SCO - 1535215

## Technical data

### Material data

Contact carrier material	PA 66
Contact material	CuZn
Contact surface material	Ni/Au
Cable gland material	Zinc die-cast, nickel-plated
Sealing material	NBR

### Electrical characteristics

Number of positions	4
Nominal voltage $U_N$	250 V
Nominal current $I_N$	4 A
Surge voltage category	II
Pollution degree	3

## Classifications

### eCl@ss

eCl@ss 4.0	27140815
eCl@ss 4.1	27140815
eCl@ss 5.0	27143423
eCl@ss 5.1	27143423
eCl@ss 6.0	27143423
eCl@ss 7.0	27449001
eCl@ss 8.0	27449001

### ETIM

ETIM 2.0	EC001297
ETIM 3.0	EC002061
ETIM 4.0	EC002061
ETIM 5.0	EC002061

### UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

## Approvals

### Approvals

## Bus system flat-type plug - SACC-EC-FSD-4CON-M16/0,5 SCO - 1535215

### Approvals


Approvals

UL Recognized / GOST / GOST


Ex Approvals

Approvals submitted

### Approval details

UL Recognized 	
mm²/AWG/kcmil	26-20
Nominal current I <sub>N</sub>	4 A
Nominal voltage U <sub>N</sub>	250 V

GOST 
--

GOST 
--

### Accessories

Accessories

Protective cap

Screw plug - PROT-M12 - 1680539



An M12 screw plug for the unoccupied M12 sockets of the sensor/actuator cable, boxes and flush-type connectors

## Bus system flat-type plug - SACC-EC-FSD-4CON-M16/0,5 SCO - 1535215

### Accessories

Screw plug - PROT-M12 SH - 1503302



An M12 screw plug for the unoccupied M12 sockets of the shielded sensor/actuator cable, boxes and flush-type connectors

Screw plug - PROT-M12 FB - 1555538



M12 high-grade steel screw plug, for unoccupied M12 sockets of the sensor/actuator cables, boxes and flush-type connectors for the food industry

### Seal


Flat gasket - SACC-M16-SEAL CLM - 1430394



M16 flat gasket, for rear mounting of M12 flush-type connectors with M16 fastening thread


### Drawings

Dimensioned drawing



Housing cutout for M16 fastening thread, mounting panel with thread


Schematic diagram



Pin assignment M12 socket, 4-pos., D-coded, female side


## Bus system flat-type plug - SACC-EC-FSD-4CON-M16/0,5 SCO - 1535215

Dimensioned drawing

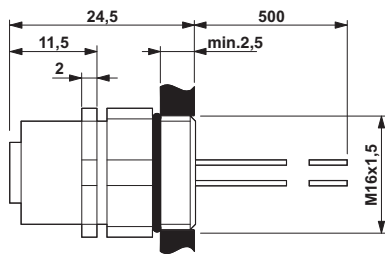

M12 flush-type socket, can be positioned

Circuit diagram

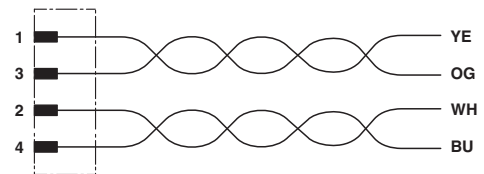

Contact assignment of the M12 socket