

High Temperature Series

Nickel-Cadmium

VNT D U HC

The new VNT U series benefits from the latest innovation on Saft's PNE (plastic bonded nickel electrode) technology. The VNT U series operates until + 55°C but also brings an improvement at low temperature, suiting perfectly with severe outdoor applications.

VNT D U HC is specially designed to accept a permanent charge in high temperature environment such as emergency lighting equipment. VNT D U HC offers at least 4 years of life duration at an average temperature up to + 55°C in accordance to the IEC 61951-1 standard (U type cells). VNT D U HC is ICEL 1010 registered for + 55°C applications.

To meet customers' requirements, Saft provides custom-designed and standardized battery packs.

For your battery design and system needs, please contact Saft's engineers.

Applications

- Emergency lighting
- Professional lighting
- Memory back-up systems
- Security devices

Main advantages

- Good charge efficiency at high temperature
- Good autonomy at low temperature
- Permanent charge
- Good storage retention
- Long life duration at high temperature

Technology

- Plastic-bonded positive electrode
- Plastic-bonded negative electrode



Electrical characteristics

Nominal voltage (V)	1.2
Typical capacity (mAh)*	4500
IEC minimum capacity (mAh)*	4200
IEC designation	KRMU 33/62
Impedance at 1000 Hz (mΩ)	6

* Charge 16 h at C/10, discharge at C/5.

Dimensions

Diameter (mm)	32.15 ± 0.1
Height (mm)	59.9 ± 0.4
Top projection (mm)	3.1 ± 0.4
Top flat area diameter (mm)	5.6
Weight (g)	124

Dimensions are given for bare cells.

Charge conditions

Rate	Time (h)	Temp. (°C)	Charge current (mA)
Standard *	16	+ 15 to + 55	420
Permanent		+ 15 to + 55	210
Trickle **			100 to 130

* End of charge cut-off is requested: timer, coulomb meter.

** Trickle charge follows full charge.

Maximum discharge current

Continuous (A) at + 20°C	14
Peak (A) at + 20°C*	150

* Peak duration: 0.3 second - final discharge voltage 0.65 volt/cell.



saft

Temperature range in discharge
- 20°C to + 70°C


Storage

Recommended: + 5°C to + 25°C
Relative humidity: 65 ± 5 %


Typical performances

For graph shown, C is the IEC₅ capacity.


Dimensions in mm.

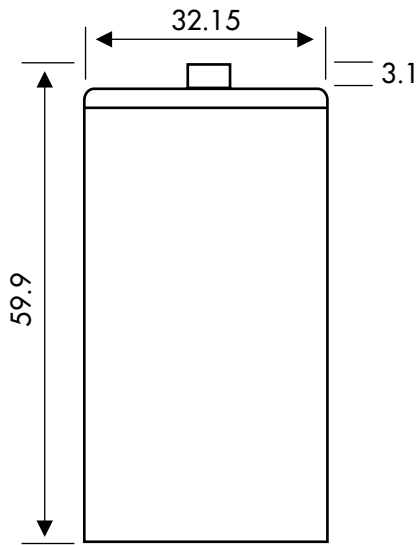


Charge 24h at C/20 at different temperature

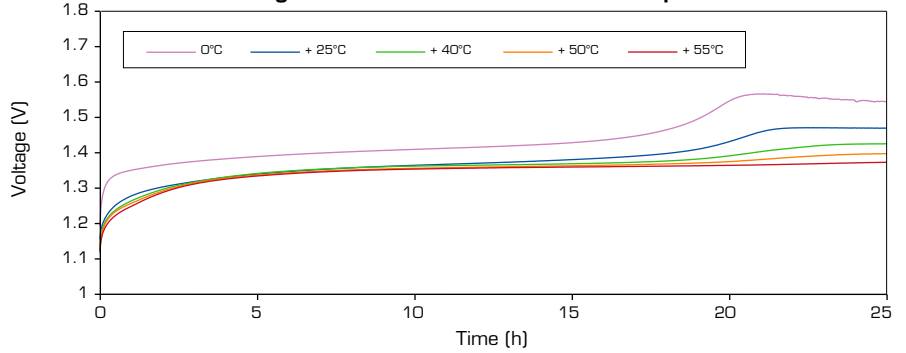


Discharge at 0.6C at different temperature after charge 24h at C/20 at different temperature

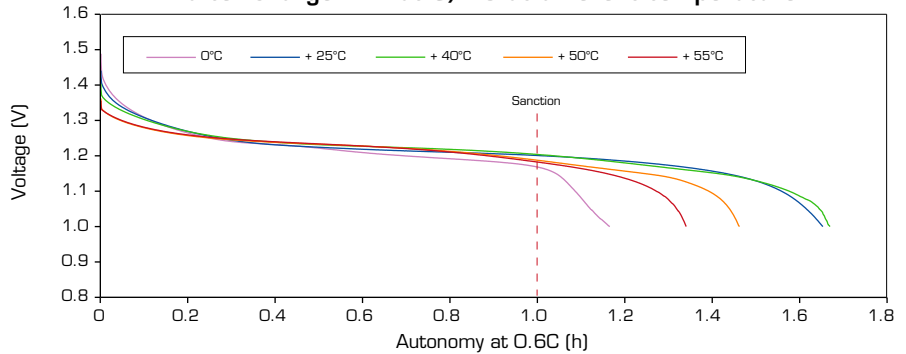

**Accelerated ageing test
ICEL 1010: 2009: E55 type**

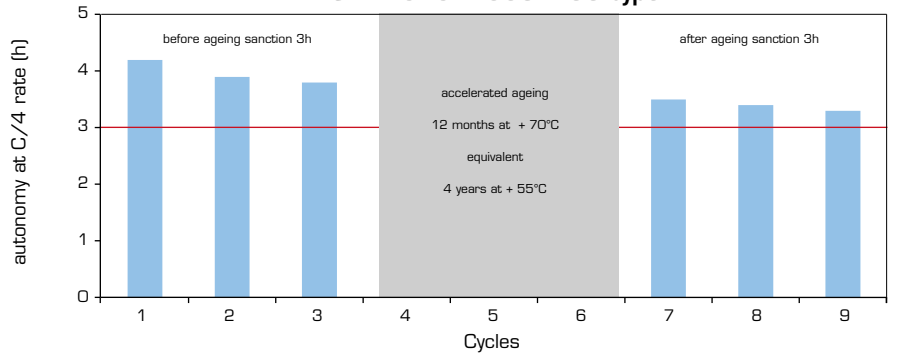

Permanent charge at C/20 @ + 55°C permanent discharge at 1.0 A every 10 weeks

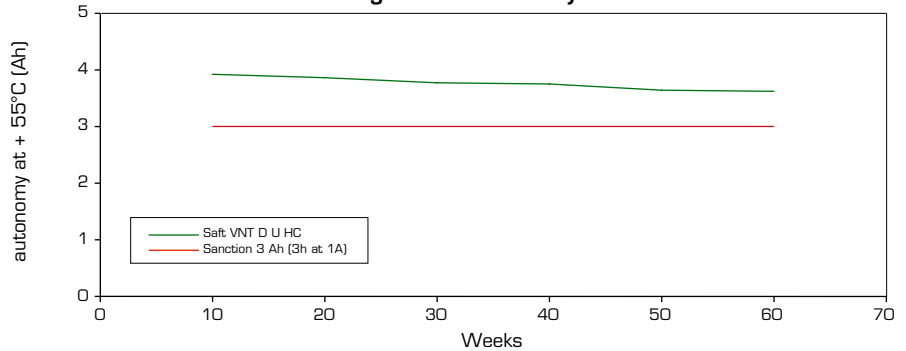

Saft
Industrial Battery Group
12, rue Sadi Carnot
93170 Bagnolet - France
Tel.: +33 (0)1 49 93 19 18
Fax: +33 (0)1 49 93 19 68
Email: rbs.info@saftbatteries.com

www.saftbatteries.com

DOC N°11136-2-0311
Data in this document are subject to change without notice and become contractual only after written confirmation by Saft.
Photo credits: Saft
Published by the Communication Department
Saft SAS Stock capital 31.944.000 €
RCS Bobigny B 383 703 873
Designed by Soyouzgraphic

