


PIN BUS BAR SHOCKHAZARD SAFETY, 16QMM 3  
PHASE, L= 214MM CAN BE CUT, WITH END CAPS



Model		
product brandname		SENTRON
Product designation		Pin busbar
Design of the product		16mm <sup>2</sup> 3PH L214mm
Busbar design		laminated
General technical data		
Surface processing / tin-plated		No
Main circuit		
Operating current / rated value	A	80
Product details		
Product feature / flexible		Yes
Mechanical Design		
Width	mm	18
Length	mm	214
Thickness / of busbar	mm	18.3
Net weight	g	119.46
Material / of the busbar		SF-Cu F 24

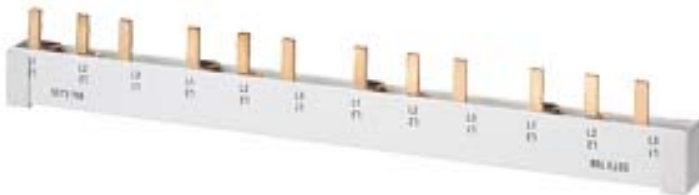

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5ST3708>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/5ST3708/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mfb=5ST3708](http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=5ST3708)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://ausschreibungstexte.siemens.com/tiplv>

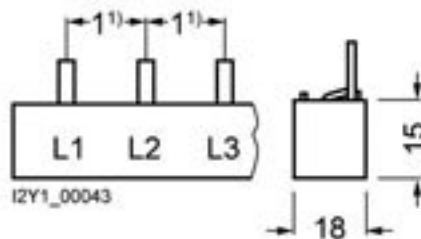

<sup>1)</sup> Pin spacings in MW (Modular widths, 1 MW = 18 mm).

last modified:

09/22/2016