

The power to do more



Outstanding performance, robust security, excellent value.

Empower your business to do more. Dell™ Color Printers (C3760n/dn) and Multifunction Printer (C3765dnf) offer the ultimate combination of excellent print quality at a low cost per page, exceptionally high print speeds, advanced security management capabilities and reliable performance. The feature-rich Dell C3765dnf combines multifunction versatility with Nuance PaperPort Pro 14 document management software to help boost office efficiency.

Designed to handle the demanding workloads of medium workgroups, the award winning Dell C3760n/dn and C3765dnf printers have been applauded for their superb performance, rich features and outstanding value.



Dell Color Printers
- C3760n/dn



Dell Color
Multifunction Printer
- C3765dnf



Dell C3765dnf
Outstanding A4
Colour MFP for
Mid-Size Workgroups
January 2013



Dell C3760dn
Outstanding A4
Colour SFP for
Mid-Size Workgroups
January 2013



Dell C3760dn
4/5 rating
October 2012



Dell C3765dnf
4/5 rating with
Editors' Choice
November 2012



Dell C3760dn
4/5 rating with
Editors' Choice
August 2012



Dell C3765dnf
8/10 rating
November 2012



Excellent value

- Packed with crucial high performance features with one of the most attractive total costs of printing (TCOP) and Cost Per Page (CPP) in the industry.
- Industry-leading high yield drums to reduce running cost and total cost of ownership.
- High yield imaging drums help reduce operating cost and total cost of ownership.
- Toner is separate from the drum unit and can be replaced individually without wastage.
- Fuser maintenance kit is covered under the warranty¹ so there are no additional costs if parts wear out during the warranty period.

Superb performance and increased productivity

- Gain efficiency with the multifunction Dell C3765dnf. Print, Scan, Copy, Fax and organise your digital documents easily with included Nuance® PaperPort® Pro 14 document management software.
- Get blazing print speeds of up to 35 pages per minute (ppm) (A4) in both mono and colour².
- Benefit from a high level of security through a combination of Lightweight Directory Access Protocol (LDAP) and Kerberos authentication measures.
- Help boost productivity with a high speed duplexer for two-sided printing (available on Dell C3760dn and C3765dnf). Dell C3765dnf also features a Duplex Automatic Document Feeder (DADF) for fast two-sided scanning.
- ColorbyDell offers excellent colour saturation and image sharpness plus outstanding print quality using advanced print technologies.



Energy efficient and environmentally conscious

- Energy efficient Emulsion Aggregation Eco Toner (EA-Eco) print technology allows less energy output, faster warm up and print time compared to printers with conventional toners.
- Easy one-touch operation activates Sleep Mode via the Energy Saver button help to save energy.
- Help reduce paper consumption with features like "N-Up" which prints multiple pages on one sheet of paper.

Easy to set up, manage and use

- Dell C3765dnf is equipped with a 4.3 inch (10.8cm) colour touchscreen LCD control panel featuring intuitive menu icons that can be easily customised for your organisation's needs.
- Get the most out of your printer with Dell's suite of management software including Dell Toner Management System™, Dell Printer Configuration Web Tool and Dell ColorTrack Pro v1.1 allowing managers to monitor toner levels, configure the printer remotely using a web browser, and manage colour printing access to control printing costs.

Outstanding reliability

- Robust performance with a high duty cycle of up to 80,000 pages (max)³.
- Gain peace of mind with Dell's standard 1-Year Next Business Day Service after Remote Diagnosis¹ that includes a Fuser Maintenance Kit; Optional: extended service options available during term of warranty for up to four years⁴.

¹ For copy of Limited Hardware Warranty, write Dell Products, Dell House, The Boulevard, Cain Road, Bracknell, Berkshire, RG12 1LF, UK or see www.dell.com/warranty. For warranty information for other countries, see website: www.dell.com/servicecontracts and then select the country. Service may be provided by third party. Technician will be dispatched if necessary following phone-based troubleshooting. Subject to parts availability, geographical restrictions and terms of service contract. Service timing dependent upon time of day call placed to Dell. Defective unit must be returned.

² Measured in accordance with ISO IEC 27434/35 methodology. Actual print speed may vary depending upon system configuration, software application and document complexity.

³ Duty cycle is defined as the maximum number of imaged outputs a device could deliver in a month. This metric provides a comparison of robustness in relation to other Dell printers and multifunction printers.

⁴ Availability and terms of Dell Services vary by region. For more information, visit www.dell.com/servicesdescriptions

Take your business productivity to the next level



Get fast print speeds of up to 35ppm (A4) in both mono and colour.



Scan, digitise and manage documents efficiently with included Nuance® PaperPort® Pro 14 document management software (Dell C3765dnf only).



Ease of operation with intuitive 4.3 inch colour touchscreen LCD and control panel (Dell C3765dnf only).



Get fast two-sided scanning with the Duplex Automatic Document Feeder (Dell C3765dnf only).



Networking versatility with built-in Ethernet and optional WiFi options.



Reduce wastage with separated toner and drum kit for convenient individual replacement.

Direct Printing from Mobile Devices

Enjoy easy printing on the move, straight from your mobile device. There is a range of mobile printing solutions to connect your mobile device to Dell C3760n/dn and C3765dnf printers¹.




Discover a fast and easy way to print directly from your Android™ mobile device with Dell Mobile Print App¹. It's simple to print documents, photos, web pages and more with this easy-to-use app which supports direct printing from a vast array of applications. Download it for free at Google Play™.



Print directly from your iPad®, iPhone® and iPod touch® to these AirPrint™-enabled printers².



Print on the go from your smartphone or computer using Google Cloud Print³ enabled apps.

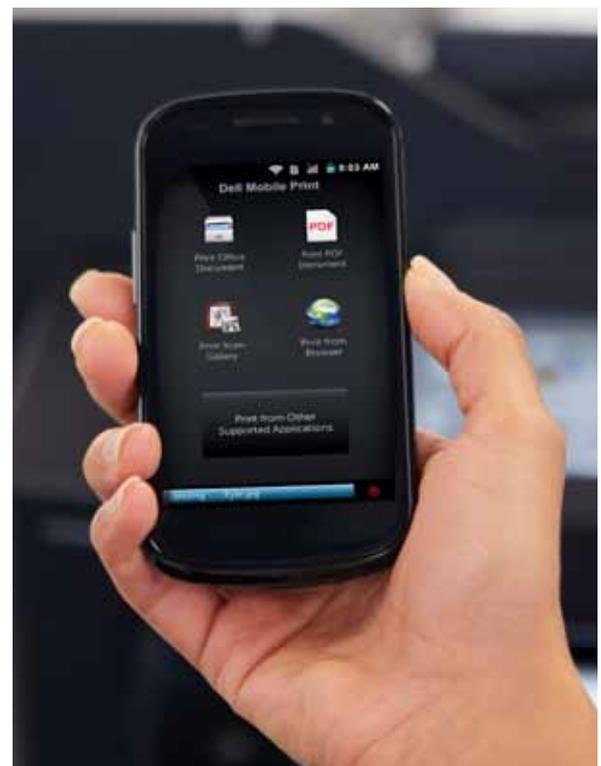

¹ The printer and the mobile device must be connected to the same wireless network.

² AirPrint-enabled printers works with iPad (all models), iPhone (3GS or later), and iPod touch (3rd generation or later) running the latest version of iOS.

³ To enable printing with Google Cloud Print, a firmware update is required prior to registering the printer to your Google account. Android, Google and Google Cloud Print are trademarks of Google Inc.

Dell C3760n/dn



1. Control panel - 4 line LCD, 10 digit keypad, one-touch Power Save button
2. Duplex Automatic Document Feeder (DADF)
3. Flatbed scanner

Dell C3765dnf



4. Control panel - 4.3" Colour LCD touchscreen
5. 250-sheet output tray
6. Front USB port

7. 150 sheet multipurpose tray with bypass function
8. 550-sheet input tray

Consumables

Ship-with/Standard toner cartridge capacity¹

Up to 3,000 pages black
Up to 3,000 pages colour (CMY)

High capacity toner cartridge¹

Up to 7,000 pages black
Up to 5,000 pages colour (CMY)

Extra high capacity toner cartridge¹

Up to 11,000 pages black
Up to 9,000 pages colour (CMY)

Imaging drum capacity

55,000-60,000 pages (varies with printer models)

Toner waste container capacity

Up to 30,000 pages

Warranty and service options

1-Year Next Business Day On-Site Service After Remote Diagnosis²

Extended service options are available up to 4 years³

Accessories (sold separately)



Dell Wireless Card

Easily connect to a wireless network with the optional Dell Wireless Card.



Enterprise Security and Wireless kit

Enhance wireless security with the optional 160GB⁴ Hard Disc and wireless dongle that meets WPA 2.0 Enterprise.



550-sheet paper trays

Increase the printing capacity with the optional input paper tray.



Memory (RAM)

Add extra memory to your printer and achieve faster processing speeds.

¹ Toner yield based on testing in accordance with ISO/IEC 19798. Yields vary with usage and environmental conditions.

² For copy of Limited Hardware Warranty, write Dell Products, Dell House, The Boulevard, Cain Road, Bracknell, Berkshire, RG12 1LF, UK or see www.dell.com/warranty. For warranty information for other countries, see website: www.dell.com/servicecontracts and then select the country. Service may be provided by third party. Technician will be dispatched if necessary following phone-based troubleshooting. Subject to parts availability, geographical restrictions and terms of service contract. Service timing dependent upon time of day call placed to Dell. Defective unit must be returned.

³ Availability and terms of Dell Services vary by region. For more information, visit www.dell.com/servicesdescriptions

⁴ 1 MB means 1 million bytes, 1 GB means 1,000 megabytes or 1,000,000,000 bytes; total accessible capacity varies depending on operating environment.

Tray Configuration Options

■ Standard □ Optional (sold separately)

Dell C3760n/dn



Standard configuration:

■ Standard tray	550-sheet
■ Multipurpose tray	150-sheet
Total	700-sheet



Extended configuration:

■ Standard tray	550-sheet
■ Multipurpose tray	150-sheet
□ 550-sheet tray	550-sheet
Total	1,250-sheet

Dell C3765dnf



Standard configuration:

■ Standard tray	550-sheet
■ Multipurpose tray	150-sheet
Total	700-sheet



Extended configuration:


■ Standard tray	550-sheet
■ Multipurpose tray	150-sheet
□ 550-sheet tray	550-sheet
Total	1,250-sheet

Be in full control of the printer fleet with Dell OpenManage™ Printer Manager V2 (OMPM)

Quickly and easily monitor, manage and report the status of network printers from the Dell™ OMPM centralised dashboard.

Use Dell OMPM to:

- Remotely locate printers that have errors and identify problems, enabling IT managers to take the appropriate actions to remedy the situation.
- Obtain alerts via email notifications, when a printer needs attention.
- Remotely monitor toner and paper-in-tray status (applicable to most printer models).
- Group multiple printers with similar setups together for easy upgrades of all the printers in the group.

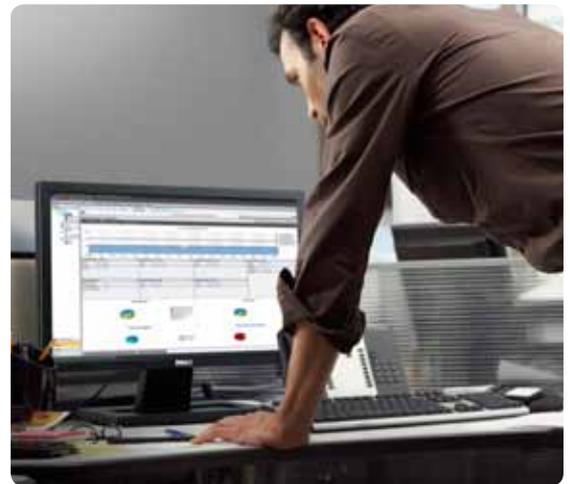

Simplify workload with Dell Open Printer Driver (OPD)

Eliminate the clutter on PCs by replacing multiple print drivers with one versatile solution, the Dell Open Printer Driver (OPD). It can help to reduce the huge workload of driver deployment and setting changes.

Product Specifications		C3760n/dn Print	C3765dnf Print, Scan, Copy, Fax	
Printer specifications	Print speed	Up to 35 pages per minute (ppm) ¹ (A4) in both mono and colour		
	Duplex speed	Up to 23 pages per minute (ppm) (A4) in both mono and colour		
	Warm up time	Less than 19.9 sec from "Power on" to Ready state on display		
	First page out time from ready state	Less than 13.5 sec (mono), 14 sec (colour)		
	Print resolution	600 x 600 dpi		
	User interface	4-line with bitmap-based mono LCD with scalable font, backlight: white backlight, 21 buttons, status LED: 1 LED (combination "data green/error amber"), power saver button (light on/off)	4.3 inch (10.8 cm) Colour Touchscreen and 10 digit keypad	
	Print Language Support	PCL® 6 Emulation (includes PCL 5e), Adobe® PostScript® 3™, PDF v1.6 Emulation		
	Processor speed	533 MHz		
	Memory (RAM)	256 MB	512 MB	
	Memory expansion	Up to 512 MB RAM via one DDR2 SO-DIMM slot (768 MB RAM max including standard memory)	Up to 512 MB RAM via one DDR2 SO-DIMM slot (1024 MB RAM max including standard memory)	
	Read-only memory (ROM)	64 MB (programs, fonts)		
Maximum duty cycle	Up to 80,000 pages per month			
Mobile printing	Dell Mobile Print (Android OS) ² , AirPrint (iOS) ³ , Google Cloud Print ⁴			
Copy specifications	Copy speed (1 to N)	Not applicable	Up to 35 copies per minute (cpm) letter/A4	
	Copy speed (N to N)		Up to 13 copies per minute (cpm) letter/A4	
	Copy resolution		Text, text/photo, and photo 600 x 600dpi	
	First copy out time		Ready mode: Platen: <20 sec /16 sec (colour/mono); ADF: <22 sec/18 sec (colour/mono) Sleep mode: Platen: <40 sec /16 sec (colour/mono); ADF: <42 sec/18 sec (colour/mono)	
	Maximum copies		Up to 99	
	Reduce/enlarge		25% to 400% (25% to 400% - ADF)	
	Flatbed copy size		Letter, A4, A5, B5, Executive	
	Copy functionality		ID copy, N-Up, collate, sharpness, colour balance, background removal, colour saturation	
	Fax specifications	Modem speed / fax transmission speed (LTR)	Not applicable	Up to 33.6 Kbps / Approximately 3 seconds per page
Fax job storage			4 MB or up to 200 pages	
Fax functionality			Fax broadcasting, delayed fax/scheduled fax, fax forwarding, secure fax receive, distinctive ring pattern detection (manual mode), ECM, PC fax, speed dial 200 locations, group dial, search LDAP support, junk fax prevention with white list filtering	
Scan specifications	Scan resolution	Not applicable	Optical: 1200 x 1200 dpi (colour@platen), Software enhanced: 9600 x 9600 dpi (max)	
	Scan depth		Colour: 24-bit; mono: 8-bit grey scale, 1 bit lineart	
	Scan utilities / applications		Nuance® PaperPort® Pro 14, Languages supported: English, French, Italian, German, Spanish, OS: Windows Vista/Windows 7 (32-bit/64-bit), Windows XP (32-bit only)	
	Scanning functionality		Scan to USB, Scan to email, Scan to FTP (network server), Scan to SMB (network folder)	
	Scan to media (file format)		JPEG, TIFF (single/multi), PDF (v1.6)	
Automatic Document Feeder (ADF)	ADF type	Not applicable	Duplex Automatic Document Feeder (DADF)	
	Input / output capacity		Up to 50 sheets, 60-125 gsm (bond paper)	
	Media size		A4, A5, B5, US Letter, Executive, US Legal, folio; Width: 139 to 216 mm; Length: 140 to 356 mm	
Paper handling	Standard input sources	150 sheet multipurpose tray with bypass function, 550 sheet standard tray		
	Additional input capacity	Optional 550-sheet drawer		
	Maximum input capacity	1250 sheets		
	Duplexer (for two-sided printing)	Standard (C3760dn only)	Standard	
	Standard output destination	250-sheet bin		
	Maximum output capacity	250 sheets		
Supported media types, sizes and paper weights	Media types supported	Plain paper (60 - 90 gsm), thicker paper (91 - 105 gsm), heavier paper-L (106 - 163 gsm) / heavier paper-H (164 - 216 gsm), label, envelope, post card, recycled paper (up to 70%), coated paper-L (95 - 105 gsm) / coated paper-M (106 - 163 gsm) / coated paper-H (164 - 216 gsm)		
	Media sizes	- Multipurpose 150-sheet tray	A4, B5, A5, US Letter, Executive, Folio, US Legal, Legal13 SEF / Legal14 SEF, Com-10 SEF, Monarch/ DL-SEF, C5 SEF, post card; Custom size: Width: 76.2 mm - 215.9 mm, Length: 127 mm - 355.6 mm	
		- Standard and optional 550-sheet drawers and duplexer	A4, B5, A5, US Letter, Executive, Folio, US Legal, Legal13 SEF / Legal14 SEF; Custom size: Width: 148.5 mm to 215.9 mm; Length: 210 mm to 355.6 mm	
	Media weight	Multipurpose tray: paper density @ bond paper, 60 - 216 gsm, Standard and optional tray: paper density @ bond paper, 60 - 216 gsm		
	Maximum printable area	207.9 mm x 347.6 mm		
Page layout options	Portrait or landscape orientation, multiple copies, duplex printing, multipage printing (N-Up), poster, booklet printing, watermarks, collate, form, rotation			

¹ Measured in accordance with ISO IEC 27434/35 methodology. Actual print speed may vary depending upon system configuration, software application and document complexity.

² The printer and the mobile device must be connected to the same wireless network.

³ AirPrint-enabled printers works with iPad (all models), iPhone (3GS or later), and iPod touch (3rd generation or later) running the latest version of iOS.

⁴ To enable printing with Google Cloud Print, a firmware update is required prior to registering the printer to your Google account. Android, Google and Google Cloud Print are trademarks of Google Inc.

Product Specifications		C3760n/dn Print	C3765dnf Print, Scan, Copy, Fax	
Consumables	Toner management	Dell Supplies Ordering Utility intelligently monitors toner status and proactively notifies the user in advance of running out of toner		
	Ship-with toner cartridge capacity ¹	Up to 3,000 pages black; Up to 3,000 pages colour (CMY)		
	Standard toner cartridge ¹	Up to 3,000 pages black; Up to 3,000 pages colour (CMY)		
	High capacity toner cartridge ¹	Up to 7,000 pages black; Up to 5,000 pages colour (CMY)		
	Extra high capacity toner cartridge ¹	Up to 11,000 pages black; Up to 9,000 pages colour (CMY)		
	Additional consumables	Imaging drum: 55,000 – 60,000 pages (varies with printer models); Toner waste container: Up to 30,000 pages		
	Toner recycling	Toner cartridges are recyclable using Dell's recycling program. For details, visit Dell.com/recycle .		
Connectivity	Standard interfaces	USB 2.0 (high speed) Client port, Ethernet port (Gigabits), Wireless port (For optional dongle), USB Host Port (USB 2.0 Embedded Host Port for USB Direct Print)		
	Wireless kit (Options: Wireless Dongle and 160GB HDD)	Enterprise Security (WPA2 Enterprise, Digital Certificate, Hard Disc Encryption and Secured Erase), WPA2 Personal, WPA, WEP		
	Network transport, print & management protocols standard	TCP/IP, IPv4/IPv6, Port 9100, LPD/LPR, FTP, SMB, IPP, IPP over SSL (with Hard Disc), WSD, HTTP, HTTPS, SSL/TLS, SNMP (v1, v2, v3), MIBv2 (RFC1213 compliant), BOOTP, DHCP, RARP, Auto IP, WINS, DNS, Bonjour (mDNS), Telnet		
Security	Security print job management	Secure Print with 4 digit Pin, virtual mail box, print job disable/enable scheduling-driver: printing disable on printer-printer EWS control		
	Storage media security management	HDD Encryption with AES 256 bit, HDD Erase (1x and 3x)		
	Network transport	HTTP, SSL/TLS, Ipsec(IKE V1), IPP Over SSL/TLS with hard disc		
	Network authentication	SNMP V3, Kerberos/digital cert, self signed, CA signed (with hard disc)	SNMP V3, Kerberos/Digital cert, self signed, CA Signed (with hard disc), NTLM (ScanToSMB only)	
	Data encryption	IPsec(IKE)/Pre-Shared Key, IPsec(IKE)/Digital Signature: HDD Required, Encryption method: AES 256bits		
	Access control management	Admin to network access lock, printer settings, reports, control panel lock features locking -USB host direct print	Admin lock network, printer settings, reports, control panel lock, feature lock copy, scan, fax, USB host printing	
	I/O access control	IO port (USB, USB front) enable/disable, network protocols enable/disable, IP filtering-EWS	Fax/I/O control (enable/disable), IO Port (USB, USB front) enable/disable, Network protocols enable/disable, IP filtering-EWS	
	Colour control	Printing via ColorTrack Pro v1.1		
	Wireless security	WEP – 64/128 bits, WPA – TKIP or AES, WPA2 Personal, WPA2 Enterprise -IEEE 802.1x (Wireless) – PEAP v0 with hard disc		
	MFP authentication	Not applicable	Copy/scan/print features lock with Op-Panel common password; Address book with LDAP Kerberos user authentication	
	Fax security	Not applicable	Secure Fax received	
	Lock type and location	Kensington lock for printer & Accessories (memory, wireless stick and HDD), Kensington lock for primary input tray, Kensington lock for optional secondary input tray, (Legal size paper could not be locked out)		
	Consumables lock type and encryption	Toner cart CRUM electronics locked and, mechanically CMYK not interchangeable		
Operating systems support	Windows®	Windows 8.1/ Windows 8, Windows RT 8/8.1, Windows 7 32bit / 64bit, Vista 32bit / 64bit (Home Basic, Home Premium, Ultimate, Business), Windows Server 2008 R1&R2, Windows XP 32 bit, 64 bit & embedded, Windows 2003 Server (all service packages), Windows Cluster Server Environment		
	Macintosh®	Mac OS 10.3.9 to 10.9, (Status Monitor supports Mac OS 10.4 - 10.6), PowerPC 64bit -No scanner driver		
	Others	SUSE Linux Enterprise Desktop 11 (x86), SUSE Linux Enterprise Desktop ver 10, Red Hat Linux Enterprise Desktop 5 (x86); Unix HP UX 11i v2 onwards, Solaris 9, IBM AIX 5.1.5.2,5.3 and 6; Novell certification, iPrint; SAP R/3 Release 4.6B onwards.		
	Citrix Presentation Server® (Metaframe) Support	Windows Server 2003 32/64bits : Citrix Presentation Server™ 4.5, Windows Server 2003 32/64bits: Citrix XenApp™ 5.0 Windows Server 2008 32/64bits: Citrix Presentation Server™ 4.5, Windows Server 2008 32/64bits: Citrix XenApp™ 5.0 Windows Server2008 R2 : Citrix XenApp™ 6.0 *Citrix with PCL Driver support only		
Supported printer languages	Print languages and fonts	Print languages: PCL 6, PostScript 3, XPS, PDF v1.6; Fonts: HP PCL® 6 Emulation: 80 scalable fonts PostScript® Level 3 136 scalable fonts	Print languages: PCL 6, PostScript 3, XPS, PDF v1.6; Fonts: HP PCL® 6 Emulation: 80 scalable fonts PostScript® Level 3 136 scalable fonts	
	Supported languages	Printer firmware and printer driver software User documentation (on CD) English, French, Italian, German, Spanish, Dutch, Danish, Norwegian and Swedish		
Regulatory certifications	Safety certifications	IEC/EN60950-1:2005 2nd edition (International); EN60950-1:2006 2nd edition IEC60825-1 (Laser); CE Mark (EU); cTUVus FDA/DHHS (21CFR, Chapter 1, Subchapter J) Other safety approvals required by individual countries.		
	EMC certifications	CE mark (EU countries) EMC/Safety Standard: EN55022:2006 + A1:2007 Class B; EN61000-3-2:2006 + A:2009 + A2:2009 Class A, EN 61000-3-3:2008, EN55024:1998 +A1:2001 +A2:2003; FCC CFR Title 47, Part 15 Class B (USA); ICES-003, Issue 4 (Canada)		
	Environmental compliance and other certifications / compliances	ErP Lot 6 Tier 1 (2010), Tier 2 (2013), ErP Lot 4 Tier 1 (2010), Tier 2 (2012), GS Mark (Germany), RoHS-compliant ² , Energy Star-qualified (C3760dn / C3765dnf only) ³ , WEEE, Citrix, SAP, Novell, USB, WiFi		
Printer management	Dell Printer Configuration Web Tool, Dell Supplies Ordering Utility, Dell ColorTrack Professional v1.1			

¹ Toner yield based on testing in accordance with ISO/IEC 19798. Yields vary with usage and environmental conditions.

² Meets the requirements of the EU Directive on the Restriction of the use of certain Hazardous Substances (RoHS) dated 27 January 2003.

³ For details on energy efficiency of Energy Star-qualified products, refer to: <http://www.energystar.gov>.

Product Specifications		C3760n/dn Print	C3765dnf Print, Scan, Copy, Fax
Physical specifications	Dimensions (W x D x H)	Printer: 439 mm x 485 mm x 379 mm; Shipping: 570 mm x 686 mm x 526 mm	Printer: 439 mm x 530 mm x 558 mm; Shipping: 570 mm x 686 mm x 706 mm
	550 sheet tray	550 sheet tray @A4 - 80 gsm, stack height 59.4 mm	
	Weight	Printer: 25.6 kg; Shipping: 30.5 kg	Printer: 32.6 kg; Shipping: 37.5 kg
	Operating environment	Temperature: 5 to 32 °C; Relative humidity: 15 to 85% RH, non-condensing; Altitude: ≤ 3,100 m above sea level	
	Storage	Packaged: Temperature: 0 to 35° C; Relative humidity: 15 to 80% RH; Altitude: ≤ 3,100 m above sea level	
	Acoustics ¹	- Printing (simplex mode)	Sound Pressure, Bystander position (LpAm): 54dB (Ref); Average Sound Power (LWAd), declared: 7.15B Colour, 6.95B Mono
	- Standby mode	Sound pressure, bystander position (LpAm): 29dB (Ref); Average Sound Power (LWAd), declared: 4.69B	Sound Pressure, Bystander position (LpAm): 27dB (Ref); Average Sound Power (LWAd), declared: 4.69B
Power specifications	Voltage	- 230 vac models	220 to 240 vac ± 10 %, 50 ± 3 Hz / 60 ± 3 Hz nominal
	Power consumption (Energy Star®-compliant) ²	Continuous printing: 705W; Standby mode: 76W; Power Saver mode: Sleep: 14W, Deep sleep: 5W; Off: 0W	Continuous printing: 750W; Standby mode: 82W; Power Saver mode: Sleep: 19.5W, Deep sleep: 6W; Off: 0W
	Typical energy consumption	3.1KWH/week (TEC 230V / 120V) ⁴	
	Average current consumption	3A or less @220V	
	Power Save options	User definable 5 - 60 mins. (default 6 mins.)	
	Contents in a box	Dell C3760n/dn Printer, Dell ship-with black, cyan, magenta and yellow cartridges (3,000 page yield ³), placemat, Product Information Guide, safety precaution techsheet, drivers and utilities CD, power cord	Dell C3765dnf Printer, Dell ship-with black, cyan, magenta and yellow cartridges (3,000 page yield ³), placemat, safety precaution techsheet, drivers and utilities CD, Product Information Guide, RJ11 cable, fax terminator plug (Europe only), power cord

¹ Tested in accordance with ISO 7779 and reported in accordance with ISO 9296, Acoustics - Declared noise emission values of computer and business equipment.

² For details on energy efficiency of Energy Star-qualified products, refer to: <http://www.energystar.gov>.

³ Toner yield based on testing in accordance with ISO/IEC 19798. Yields vary with usage and environmental conditions.

⁴ For the Typical Energy Consumption value calculation details please visit: http://www.energystar.gov/ia/products/fap/IE_TEC_Test_Procedure.pdf.

©2014 Dell Corporation Limited. Dell, the Dell logo and Dell Toner Management System are registered trademarks or trademarks of Dell Inc. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Dell disclaims proprietary interest in the marks and names of others. Microsoft, Windows and Windows NT are registered trademarks or trademarks of Microsoft Corporation. Android and Google Cloud Print are registered trademarks of Google Inc. iPad, iPhone, iPod, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. AirPrint and the AirPrint logo are trademarks of Apple Inc. PCMag is a trademark of Ziff Davis, Inc. Used under license. Reprinted with permission. © 2011/2012 Ziff Davis, Inc. All Rights Reserved. Dell Products, Dell House, The Boulevard, Cain Road, Bracknell, Berkshire, RG12 1LF, UK. — C3760n/dn, C3765dnf EN

Specifications are subject to change without notice. Dell cannot be responsible for errors and omissions in typography or photography. Product availability varies by country. Please contact your Dell representative for more information.

G13000507 - 01/14

