




Power Triple Lock

TE Internal #: 2-1971876-4
12 Position, Plug, Housing, Crimp, Wire-to-Wire, UL 94V-0, 6 mm [.236 in] Centerline, 3 Row, 600 VAC, Wire & Cable, Power, Power Triple Lock

[View on TE.com >](#)

Connectors > Rectangular Connectors > Standard Rectangular Connectors > POWER TRIPLE LOCK Plug, Standard Temperature

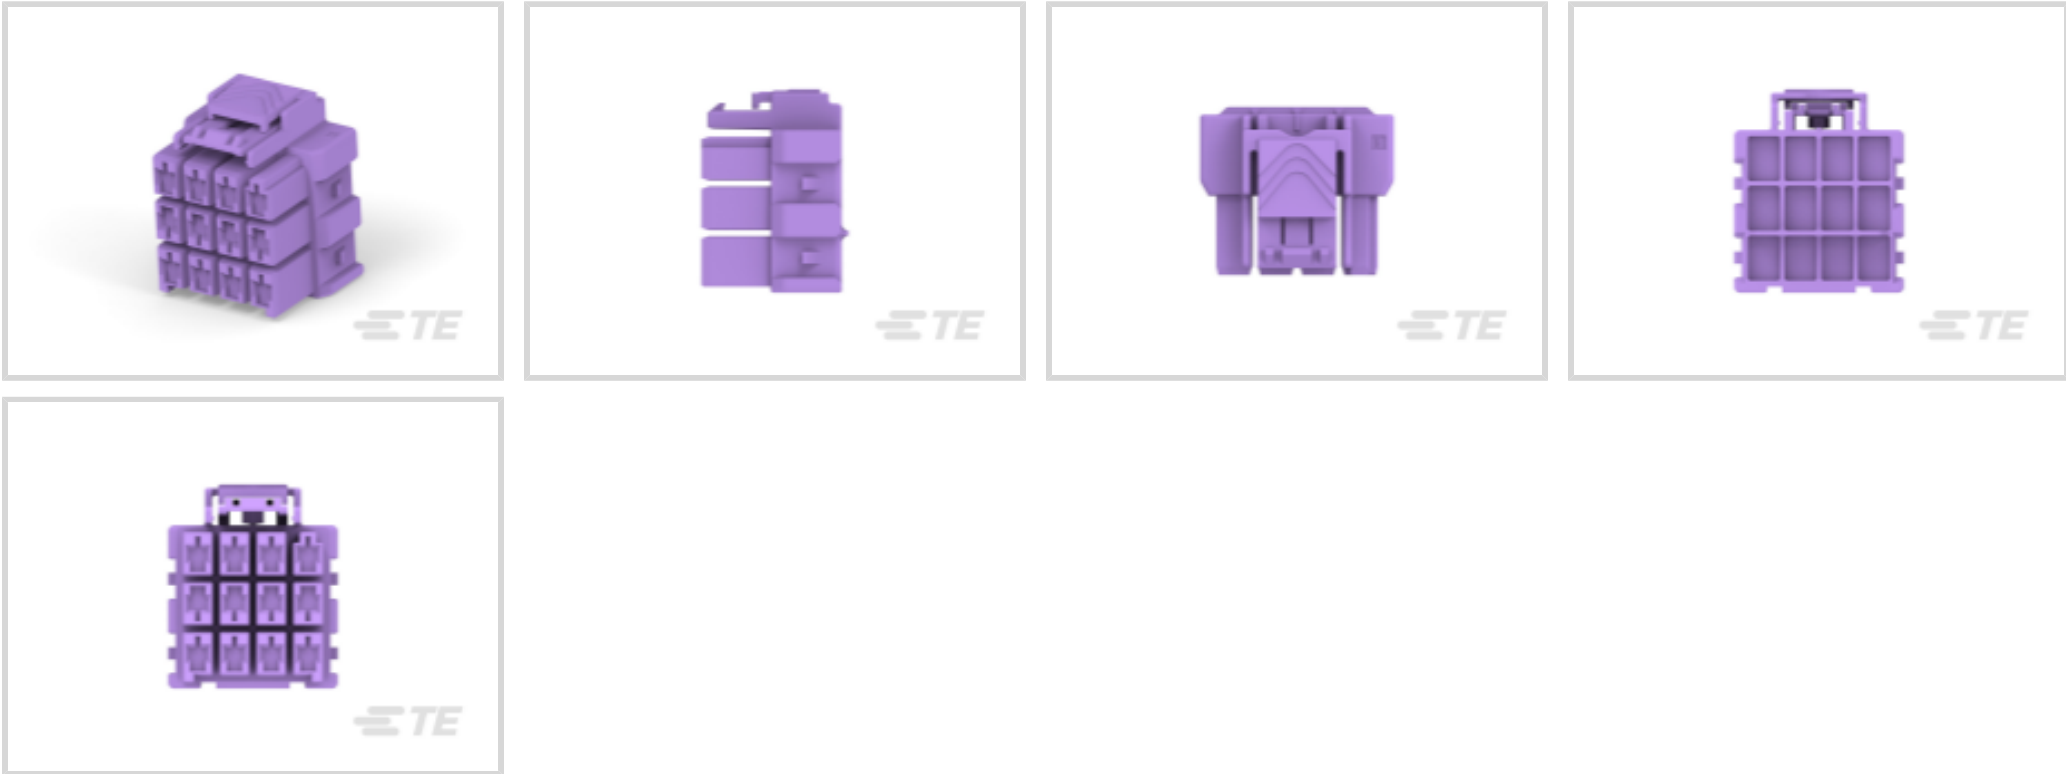

Connector Product Type: **Housing**
Connector & Housing Type: **Plug**
Termination Method to Wire & Cable: **Crimp**
Connector System: **Wire-to-Wire**
Contact Retention Within Housing: **Without**

[All POWER TRIPLE LOCK Plug, Standard Temperature \(48\)](#)

Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	12
Number of Rows	3
Number of Power Positions	12

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Body Features

--	--



Connector & Keying Code	B
Primary Product Color	Purple
Cable Exit Angle	180 °

Contact Features

Contact Layout	Matrix
Contact Retention Within Housing	Without
Contact Type	Receptacle

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Panel Mount Feature	Without
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Centerline (Pitch)	6 mm [.236 in]
Housing Material	PBT GF

Dimensions

Row-to-Row Spacing	8.1 mm [.319 in]
--------------------	------------------

Usage Conditions

Operating Temperature Range	-55 – 105 °C [-67 – 221 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Identification Marking

Circuit Identification Feature	With
--------------------------------	------

Industry Standards

Compatible With Agency/Standards Products	UL
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Method	Carton
------------------	--------



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1452426-1
EXTRACTION TOOL

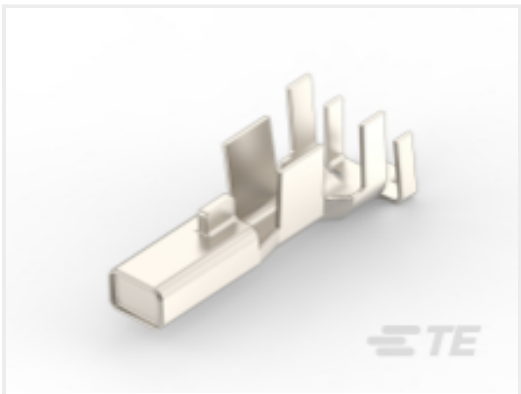

TE Part # CAT-P87074-R2435
Receptacle Contact — POWER TRIPLE LOCK



TE Part # CAT-P87074-T669
Locking Plate, POWER TRIPLE LOCK, TPA



TE Part # 2-1971875-4
PTL 3X4 CAP PANEL MT STD TEMP KEY B PUR



TE Part # 1-2232357-4
PTL 3X4 PLUG HSG HOT WIRE KEY A
BLK

TE Part # 1971789-1
CPA

Also in the Series

Power Triple Lock

Connector Contacts(26)

Connector Hardware(12)

Insertion & Extraction Tools(1)

PCB Headers & Receptacles(21)

Power Contacts(26)

Rectangular Power Connectors(301)

Wire-to-Board Headers & Receptacles
(21)

Customers Also Bought

TE Part #EC9833-000
ZHD-SCE-3.2-50-S1-4

TE Part #ASA158F12390235000
623 PLUG

TE Part #55992-1
TERMINAL,AMPOWER R 2/0 5/16

TE Part #1-1415543-5
RTE44110

TE Part #1614770-4
BDS 2 A 250 10R 10%

TE Part #ZPF000000000205373
PLUG MALE ANG.90 CAL.20 - FXP

TE Part #ZPF000000000136485
RECEPTACLE MALE FOR 12 PINS,
CAL1,6

TE Part #ZPF000000000205378
CONTACT MALE ANG.90, CAL20,
120MM2 - FXP



Documents

Product Drawings

[PTL 3X4 PLUG HSG STD TEMP KEY B PUR](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_2-1971876-4_E.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-1971876-4_E.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-1971876-4_E.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[9-1773465-1Power Triple Lock QRG](#)

English

Product Specifications

[Application Specification](#)

English