

Ordering code system

B37979N
1
100
K
0
54
Packaging

51 $\triangle$ cardboard tape, reel packing (360-mm reel)

54 $\triangle$ Ammo packing (standard)

00 $\triangle$ bulk

Internal coding
Capacitance tolerance
J $\triangle$ $\pm 5\%$ (standard for C0G)

K $\triangle$ $\pm 10\%$ (standard for X7R)

M $\triangle$ $\pm 20\%$ (standard for Z5U (Y5U))

Capacitance, coded 101 $\triangle$ $10 \cdot 10^1$ pF = 100 pF
(example) 222 $\triangle$ $22 \cdot 10^2$ pF = 2,2 nF
 473 $\triangle$ $47 \cdot 10^3$ pF = 47 nF

Rated voltage

Rated voltage [VDC]	50	100
Code	5	1

Type and size

With radial leads
EIA standard

Temperature characteristic
C0G X7R

Z5U (Y5U)

Lead spacing 2,5 mm
5,5 $\times$ 5,0 $\times$ 2,5
6,5 $\times$ 5,0 $\times$ 2,5

B37979N
B37986N

B37981M
B37987M

B37982N
B37988N

Lead spacing 5,0 mm
5,5 $\times$ 5,0 $\times$ 2,5
6,5 $\times$ 5,0 $\times$ 2,5
9,0 $\times$ 7,5 $\times$ 2,5

B37979G
B37986G
—

B37981F
B37987F
B37984M

B37982G
B37988G
B37985N

Features

- High volumetric efficiency
- Non-linear capacitance change
- High insulation resistance
- High pulse strength



Applications

- Blocking
- Coupling and decoupling
- Interference suppression

Termination

- Parallel wire leads, iron-nickel, tinned
- Crimped leads
- Non-standard lead lengths on request

Marking

- Rated capacitance, tolerance, manufacturer's logo, ceramic material, voltage

Delivery mode

- Cardboard tape in Ammo packing (standard)
- Cardboard tape on 360-mm reel or bulk on request


Electrical data

Temperature characteristic		X7R	
Climatic category (IEC 60068-1)		55/125/56	
Standard		EIA	
Dielectric		Class 2	
Rated voltage ¹⁾	V_R	50, 100	VDC
Test voltage	V_{test}	$2,5 \cdot V_R / 5 \text{ s}$	VDC
Capacitance range / E series	C_R	470 pF ... 1 μ F (E6)	
Max. relative capacitance change	$\Delta C/C$	± 15	%
Dissipation factor (limit value)	$\tan \delta$	$< 25 \cdot 10^{-3}$	
Insulation resistance ²⁾ at + 25 °C	R_{ins}	$> 10^5$	M Ω
Insulation resistance ²⁾ at +125 °C	R_{ins}	$> 10^4$	M Ω
Time constant ²⁾ at + 25 °C	τ	> 1000	s
Time constant ²⁾ at +125 °C	τ	> 100	s
Operating temperature range	T_{op}	-55 ... +125	°C
Ageing ³⁾		yes	

1) Note: No operation on AC line.

2) For $C_R > 10 \text{ nF}$ the time constant $\tau = C \cdot R_{ins}$ is given.


3) Refer to chapter "General Technical Information", page 197.



Capacitance tolerances

Code letter	K (standard)	M
Tolerance	$\pm 10\%$	$\pm 20\%$

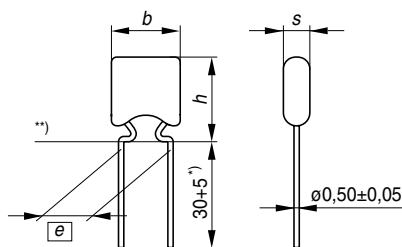Dimensional drawing






*) Lead length for bulk packaging

**) Seating plane in acc. with IEC 600717


KKE0456-R-E

Dimensions (mm)

	Lead spacing $\boxed{e} = 2,5 + 0,6 / - 0,1$ mm	
Type	B37981M	B37987M
		
$h_{\max}$	5,5	6,5
$b_{\max}$	5,0	5,0
$s_{\max}$	2,5	2,5

	Lead spacing $\boxed{e} = 5,0 + 0,6 / - 0,1$ mm		
Type	B37981F	B37987F	B37984M
			
$h_{\max}$	5,5	6,5	9,0
$b_{\max}$	5,0	5,0	7,5
$s_{\max}$	2,5	2,5	2,5

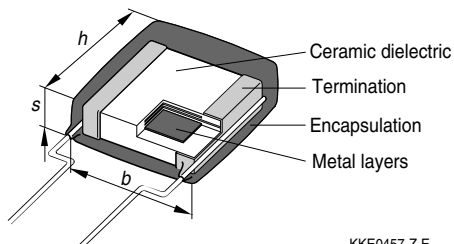Termination








KKE0457-Z-E

Multilayer Ceramic Capacitors

X7R

Product range leaded capacitors

	X7R									
Lead spacing	2,5 mm				5,0 mm					
										
$h \times b \times s$ (mm)	5,5 × 5,0 × 2,5		6,5 × 5,0 × 2,5		5,5 × 5,0 × 2,5		6,5 × 5,0 × 2,5		9,0 × 7,5 × 2,5	
Type	B37981M		B37987M		B37981F		B37987F		B37984M	
V_R (VDC)	50		100		50		100		50	
C_R	50		100		50		100		50	
470 pF										
680 pF										
1,0 nF										
1,5 nF										
2,2 nF										
3,3 nF										
4,7 nF										
6,8 nF										
10 nF										
15 nF										
22 nF										


Product range leaded capacitors

	X7R									
Lead spacing	2,5 mm				5,0 mm					
										
$h \times b \times s$ (mm)	5,5 × 5,0 × 2,5		6,5 × 5,0 × 2,5		5,5 × 5,0 × 2,5		6,5 × 5,0 × 2,5		9,0 × 7,5 × 2,5	
Type	B37981M		B37987M		B37981F		B37987F		B37984M	
V_R (VDC)	50	100	50	100	50	100	50	100	50	
C_R										
33 nF										
47 nF										
68 nF										
100 nF										
150 nF										
220 nF										
330 nF										
470 nF										
680 nF										
1,0 μ F										

Multilayer Ceramic Capacitors

X7R

Ordering codes and packing for X7R, 50 VDC, lead spacing 2,5 mm

C _R	Ordering code ¹⁾	Ammo packing	Reel packing	Bulk
		** $\triangle$ 54	** $\triangle$ 51	** $\triangle$ 00
		pcs	pcs/reel	pcs


B37981, 50 VDC, 5,5 × 5,0 × 2,5 mm

3,3 nF	B37981M5332K0**	2500	2500	2000
4,7 nF	B37981M5472K0**	2500	2500	2000
6,8 nF	B37981M5682K0**	2500	2500	2000
10 nF	B37981M5103K0**	2500	2500	2000
15 nF	B37981M5153K0**	2500	2500	2000
22 nF	B37981M5223K0**	2500	2500	2000
33 nF	B37981M5333K0**	2500	2500	2000
47 nF	B37981M5473K0**	2500	2500	2000

B37987, 50 VDC, 6,5 × 5,0 × 2,5 mm

68 nF	B37987M5683K0**	2500	2500	2000
100 nF	B37987M5104K0**	2500	2500	2000
150 nF	B37987M5154K0**	2500	2500	2000
220 nF	B37987M5224K0**	2500	2500	2000

1) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 164.

**Ordering codes and packing for X7R, 50 VDC, lead spacing 5,0 mm**

C_R	Ordering code ¹⁾	Ammo packing	Reel packing	Bulk
		** $\triangle$ 54	** $\triangle$ 51	** $\triangle$ 00
		pcs	pcs/reel	pcs

B37981, 50 VDC, 5,5 × 5,0 × 2,5 mm

3,3 nF	B37981F5332K0**	2500	2500	2000
4,7 nF	B37981F5472K0**	2500	2500	2000
6,8 nF	B37981F5682K0**	2500	2500	2000
10 nF	B37981F5103K0**	2500	2500	2000
15 nF	B37981F5153K0**	2500	2500	2000
22 nF	B37981F5223K0**	2500	2500	2000
33 nF	B37981F5333K0**	2500	2500	2000
47 nF	B37981F5473K0**	2500	2500	2000

B37987, 50 VDC, 6,5 × 5,0 × 2,5 mm

68 nF	B37987F5683K0**	2500	2500	2000
100 nF	B37987F5104K0**	2500	2500	2000
150 nF	B37987F5154K0**	2500	2500	2000
220 nF	B37987F5224K0**	2500	2500	2000

B37984, 50 VDC, 9,0 × 7,5 × 2,5 mm

330 nF	B37984M5334K0**	2000	2000	2000
470 nF	B37984M5474K0**	2000	2000	2000
680 nF	B37984M5684K0**	2000	2000	2000
1,0 μ F	B37984M5105K0**	2000	2000	2000

1) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 164.

Multilayer Ceramic Capacitors

X7R

Ordering codes and packing for X7R, 100 VDC, lead spacing 2,5 mm

C _R	Ordering code ¹⁾	Ammo packing	Reel packing	Bulk
		** $\triangle$ 54	** $\triangle$ 51	** $\triangle$ 00
		pcs	pcs/reel	pcs


B37981, 100 VDC, 5,5 × 5,0 × 2,5 mm

470 pF	B37981M1471K0**	2500	2500	2000
680 pF	B37981M1681K0**	2500	2500	2000
1,0 nF	B37981M1102K0**	2500	2500	2000
1,5 nF	B37981M1152K0**	2500	2500	2000
2,2 nF	B37981M1222K0**	2500	2500	2000
3,3 nF	B37981M1332K0**	2500	2500	2000
4,7 nF	B37981M1472K0**	2500	2500	2000
6,8 nF	B37981M1682K0**	2500	2500	2000
10 nF	B37981M1103K0**	2500	2500	2000
15 nF	B37981M1153K0**	2500	2500	2000

B37987, 100 VDC, 6,5 × 5,0 × 2,5 mm

22 nF	B37987M1223K0**	2500	2500	2000
33 nF	B37987M1333K0**	2500	2500	2000
47 nF	B37987M1473K0**	2500	2500	2000
68 nF	B37987M1683K0**	2500	2500	2000
100 nF	B37987M1104K0**	2500	2500	2000
150 nF	B37987M1154K0**	2500	2500	2000

¹⁾ The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 164.

**Ordering codes and packing for X7R, 100 VDC, lead spacing 5,0 mm**

C_R	Ordering code ¹⁾	Ammo packing	Reel packing	Bulk
		** $\triangle$ 54	** $\triangle$ 51	** $\triangle$ 00
		pcs/reel	pcs	pcs

B37981, 100 VDC, 5,5 × 5,0 × 2,5 mm

470 pF	B37981F1471K0**	2500	2500	2000
680 pF	B37981F1681K0**	2500	2500	2000
1,0 nF	B37981F1102K0**	2500	2500	2000
1,5 nF	B37981F1152K0**	2500	2500	2000
2,2 nF	B37981F1222K0**	2500	2500	2000
3,3 nF	B37981F1332K0**	2500	2500	2000
4,7 nF	B37981F1472K0**	2500	2500	2000
6,8 nF	B37981F1682K0**	2500	2500	2000
10 nF	B37981F1103K0**	2500	2500	2000
15 nF	B37981F1153K0**	2500	2500	2000

B37987, 100 VDC, 6,5 × 5,0 × 2,5 mm

22 nF	B37987F1223K0**	2500	2500	2000
33 nF	B37987F1333K0**	2500	2500	2000
47 nF	B37987F1473K0**	2500	2500	2000
68 nF	B37987F1683K0**	2500	2500	2000
100 nF	B37987F1104K0**	2500	2500	2000
150 nF	B37987F1154K0**	2500	2500	2000

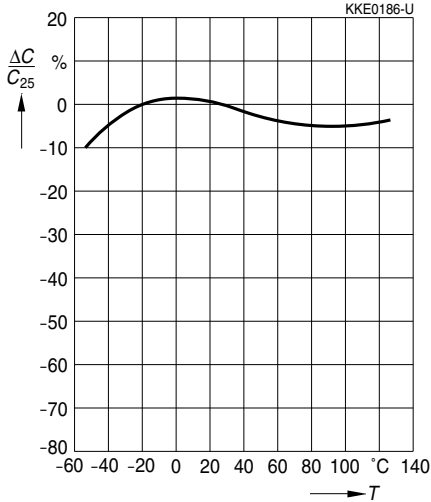
1) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 164.

Multilayer Ceramic Capacitors


X7R

Typical characteristics


Capacitance change $\Delta C/C_{25}$ versus temperature T



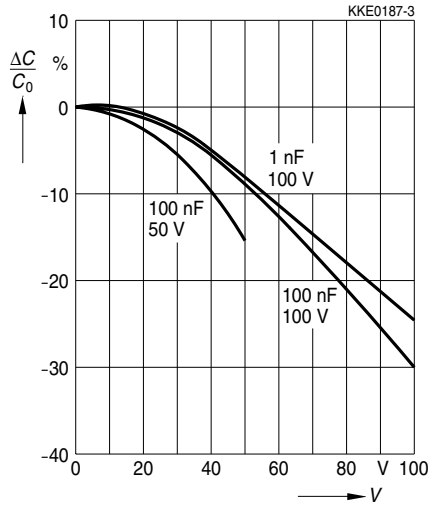
Capacitance change $\Delta C/C_0$ versus superimposed DC voltage V




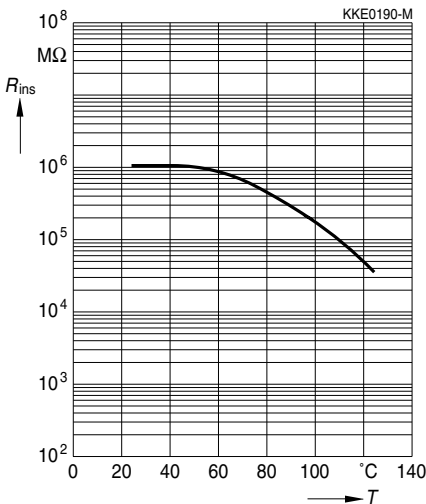Insulation resistance R_{ins} versus temperature T



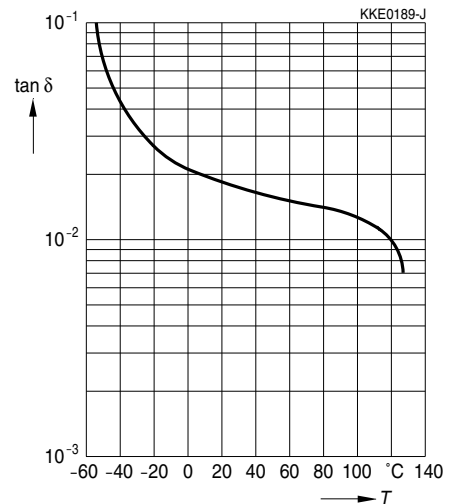
Dissipation factor $\tan \delta$ versus temperature T





Typical characteristics

Impedance $|Z|$ versus
frequency f

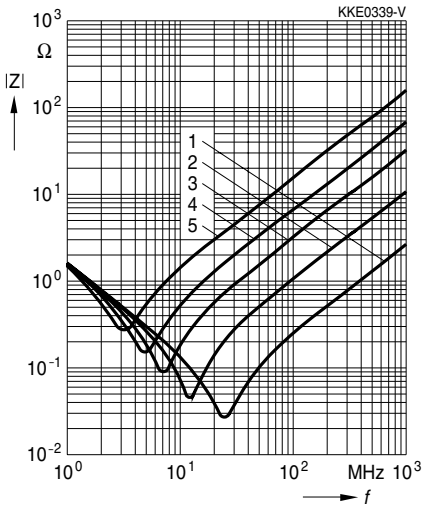

- 1: Chip
- 2: 1,5 mm lead length
- 3: 5,0 mm lead length
- 4: 10,0 mm lead length
- 5: 20,0 mm lead length

Capacitance change $\Delta C/C_1$ versus
time t

