
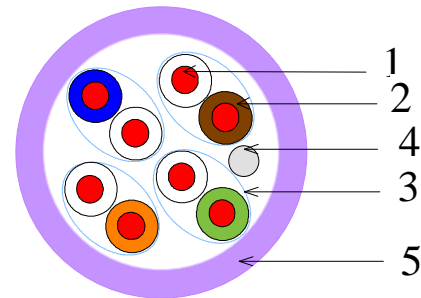


REF : 525xSH

100 Ω U/FTP 4 or 8 pairs cable Category 6a – LSZH outer sheath

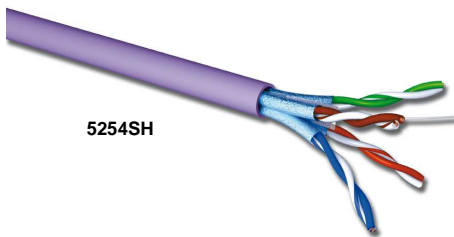

1. **Conductor** : Solid bare copper AWG23
2. **Insulation** : PE Skin-Foam-Skin
3. **Individual shield of pairs**: Aluminium/Polyester foil ; Coverage:110%
4. **Drain wire** : Solid tinned copper
5. **Outer jaket** : LSZH –Violet RAL 4001

Description

PIMF (Pair In Metallic foil) data cable used in full shielded structured cabling system, for horizontal or vertical (Backbone) configuration.

Its performances exceed the limits required by current standards thanks to its excellent high-speed and error free transmission up to 525 Mhz. It constitutes an investment for the future network applications.

This cable is used for transmission of digital and analogue voice, data and video signals.

This cable can transmit :

- ISDN - RNIS
- TOKEN RING 4/16 Mbits
- 100 VG-AnyLAN
- TP-PMD/TP-DDI
- ATM 155, 622 Mbits/s and 1,2Gbits
- ETHERNET 10 Base T
- ETHERNET 100 Base Tx, 100 Base T4
- ETHERNET 1000 Base T – GIGABIT Ethernet
- IEEE 802.3 af – PoE (Power Over Ethernet) and DRAFT 4.2 IEEE 802.3 at - future PoE+
- 10 GIGABIT ETHERNET (Up to 100 m)

Standards

CABLE	IEC 61156-5 Cat6a
SYSTEM	ISO/IEC 11801 CLASS Ea

REF : 525xSH

100 Ω U/FTP 4 or 8 pairs cable Category 6a – LSZH outer sheath

Electrical properties	Physical characteristics
Max. electrical resistance of conductors : 95 Ω / Km	Fire behaviour : IEC 60332-1 & NF C 32070 C2
Mutual capacitance (nom.) : 45 pF / m	Operating temperature : - 20° C / + 70° C
Characteristic impedance from 1 to 525MHz : 100 Ω	Minimum bending radius: 8 x cable diameter
Velocity of propagation : 79 %	Conform to RoHS directive

Transmission performances

MESURES (MHZ)	ATTENUATION (dB/100m)		NEXT (dB)		PS NEXT (dB)		ELFLEXT (dB/100m)		PSELFEXT (dB/100m)		RETURN LOSS (dB)	
	Standard	M.M.C	Standard	M.M.C	Standard	M.M.C	Standard	M.M.C	Standard	M.M.C	Standard	M.M.C
4	3.8	3.7	66.3	67	63.3	64	55.9	66	52.9	63	23.0	25
10	5.9	5.8	60.3	62	57.3	59	48	63	45	60	25.0	27
16	7.5	7.3	57.2	59	54.2	56	43.9	62	40.9	59	25.0	27
25	9.4	9.2	54.3	56	51.3	53	40	57	37	54	24.3	27
31.25	10.5	10	52.9	55	49.9	52	37.9	52	35.1	49	23.6	25
100	19.1	18.8	45.3	47	42.3	44	28	44	25	41	20.1	22
200	27.6	27	40.8	43	37.8	40	22	35	19	32	18	20
250	31.1	30.	39.3	42	36.3	39	20.0	29	17.0	26	17.3	19
300	34.3	34	38.1	40	35.1	37	18.4	27	15.4	24	17.3	19
400	40.0	39	36.3	38	33.3	35	16	26	13	23	17.3	18
500	45.3	44.8	34.8	37	31.8	34	14	26	11	23	17.3	18
525	NC	45.0	NA	36	NA	33	NA	22	NA	19	NA	17

Standard values at 20°C according to IEC 61156-5 / Cat6A;

Ordering information

Reference	5254SH	5258SH
Pairs nb	4	2X4
AWG	23	23
Outer diameter (mm)	7.3	7.3 x 15.2
Weight (Kg/Km)	58	116
Pack	Box 305m - C100m- 500m – 1000 m drums	500m drums