



Application

Use these protectors on low current mains power supplies, e.g. CCTV cameras, alarm panels, industrial battery chargers and telemetry equipment.


Installation

Connect in-line with the power supply usually either within the equipment panel (or for CCTV cameras, in an enclosure close by), or on the fused connection that supplies equipment.

Combined Type 1, 2 and 3 tested protector (to BS EN 61643) for use on low current (up to 10 or 32 A) single phase systems to protect connected electronic equipment from transient overvoltages on the mains supply, e.g. fire/intruder alarm panels. Available for 90-150 Volts, 200-280 Volts and 232-350 Volts supplies. For use at boundary LPZ 0 through to LPZ 3 boundaries to protect sensitive electronic equipment.

Features and benefits

- ✓ Very low let-through voltage (enhanced protection to BS EN 62305) between all sets of conductors (phase to neutral, phase to earth, neutral to earth - Full Mode protection) allowing continuous operation of equipment
- ✓ Repeated protection in lightning intense environments
- ✓ Compact space saving DIN housing for easy incorporation in the protected system
- ✓ Innovative multiple thermal disconnect technology for safe disconnection from faulty or abnormal supplies (without compromising protective performance)
- ✓ Three way visual indication of protector status and advanced pre-failure warning so you need never be unprotected.
- ✓ Advanced status (DS) version has remote indication facility to a BMS via an active changeover volt-free contact to show pre-failure warnings and potential phase loss (i.e. power failure, blown fuses etc), and a flashing warning of potentially fatal neutral to earth supply volts.

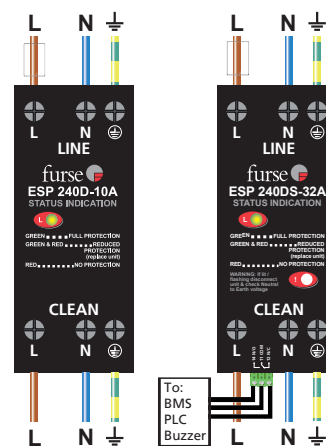

Connect in-line on supplies fused up to 10 A (ESP 120D-10A, ESP 120DS-10A, ESP 240D-10A, ESP 240DS-10A, ESP 277D-10A or ESP 277DS-10A) or 32 A (ESP 120D-32A, ESP 120DS-32A, ESP 240D-32A, ESP 240DS-32A, ESP 277D-32A or ESP 277DS-32A).

To protect equipment inside a building from transients entering on an outgoing feed (e.g. to CCTV cameras or to site lighting) the protector should be installed as close to where the cable leaves the building as possible. Protectors should be installed either within an existing cabinet/cubicle or in a separate enclosure.

Accessories

Weatherproof enclosure WBX D4

If your supply is fused at more than 32 Amps the ESP 120 M1, ESP 240 M1 or ESP 277 M1 are suitable.

** New Improved**

Technical specification

Electrical specification	ESP 120D-10A	ESP 120D-32A	ESP 240D-10A	ESP 240D-32A	ESP 277D-10A	ESP 277D-32A
	ESP 120DS-10A	ESP 120DS-32A	ESP 240DS-10A	ESP 240DS-32A	ESP 277DS-10A	ESP 277DS-32A
Nominal voltage - Phase-Neutral U_o (RMS)	120 V		240 V		277 V	
Maximum voltage - Phase-Neutral U_c (RMS)	150 V		280 V		350 V	
Temporary Overvoltage TOV U_{Tr}^1	175 V		350 V		402 V	
Short circuit withstand capability	10 kA, 50 Hz					
Working voltage (RMS)	90-150 V		200-280 V		232-350 V	
Frequency range	47-63 Hz					
Current rating (supply)	10 A or less	32 A or less	10 A or less	32 A or less	10 A or less	32 A or less
Max. back-up fuse (see installation instructions)	10 A	32 A	10 A	32 A	10 A	32 A
Leakage current (to earth)	Zero					
Indicator circuit current	< 10 mA					
Volt free contact (DS versions only) ²	Screw terminal					
- current rating	1 A					
- nominal voltage (RMS)	250 V					

Transient specification	ESP 120D-10A	ESP 120D-32A	ESP 240D-10A	ESP 240D-32A	ESP 277D-10A	ESP 277D-32A
	ESP 120DS-10A	ESP 120DS-32A	ESP 240DS-10A	ESP 240DS-32A	ESP 277DS-10A	ESP 277DS-32A
Type 1 (BS EN/EN), Class I (IEC)						
Nominal discharge current 8/20 μ s (per mode) I_n	20 kA					
Let-through voltage U_p at I_n	<700 V		<1000 V		<1200 V	
Impulse discharge current 10/350 μ s I_{imp} (per mode) ⁴	4 kA					
Let-through voltage U_p at I_{imp}	<650 V		<900 V		<1000 V	
Total discharge current (total to earth) I_{total} ^{4,5}	6.25 kA					
Type 2 (BS EN/EN), Class II (IEC)						
Nominal discharge current 8/20 μ s (per mode) I_n	20 kA					
Let-through voltage U_p at I_n	<700 V		<1000 V		<1200 V	
Maximum discharge current I_{max} (per mode) ⁴	40 kA					
Type 3 (BS EN/EN), Class III (IEC)						
Let-through voltage at U_{oc} of 6 kV 1.2/50 μ s and I_{sc} of 3 kA 8/20 μ s (per mode) ^{3,6}	390 V		600 V		680 V	

Mechanical specification	ESP 120D-10A	ESP 120D-32A	ESP 240D-10A	ESP 240D-32A	ESP 277D-10A	ESP 277D-32A
	ESP 120DS-10A	ESP 120DS-32A	ESP 240DS-10A	ESP 240DS-32A	ESP 277DS-10A	ESP 277DS-32A
Temperature range	-40 to +80 °C					
Connection type	Screw terminal - maximum torque 0.8 Nm ⁷					
Conductor size (stranded)	4 mm ²					
Earth connection	Screw terminal - maximum torque 0.8 Nm ⁷					
Volt free contact (DS versions only)	Connect via screw terminal with conductor up to 1.5 mm ² (stranded) - maximum torque 0.25 Nm ⁷					
Degree of protection (IEC 60529)	IP20					
Case material	Flame retardant to UL-94 V-0					
Weight - unit	0.23 kg					
- packaged	0.25 kg					
Dimensions to DIN 43880 - HxDxW ⁸	90 mm x 75 mm x 36 mm (2TE)					

¹ Temporary Overvoltage rating is for a maximum duration of 5 seconds tested to BS/EN/IEC 61643

² Minimum permissible load is 5 V DC, 10 mA to ensure reliable operation.

³ The maximum transient voltage let-through of the protector throughout the test ($\pm 10\%$).

⁴ The electrical system, external to the unit, may constrain the actual current rating achieved in a particular installation.

⁵ Rating is considered as the current capability of the protector for equipotential bonding near the service entrance.

⁶ Combination wave test within BS EN/IEC 61643, IEEE C62.41-2002 Location Cats C1 & B3, SS 555:2010, AS/NZS 1768-2007, UL 1449 mains wire-in.

⁷ Torque should typically be 50% to 75% of the maximum value.

⁸ The remote signal contact (removable) adds 10 mm to height.

** To enclose the products to IP65, fit within a WDX D4, available from Furse. **

