

# G-INB-M32-M68N-PEPDS-LG - Cable gland



1415176

<https://www.phoenixcontact.com/gb/products/1415176>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 13 mm ... 21 mm, shielding: no, connecting thread: M32 x 1.5, color: lightgray RAL 7035, with bend protection sleeve

## Your advantages

- Glow-wire test: 750°C
- Weatherproof sealing material
- Halogen-free

## Commercial data

Item number	1415176
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	AF7DEX
Product key	AF7DEX
Catalog page	Page 696 (C-2-2019)
GTIN	4055626038070
Weight per piece (including packing)	67.34 g
Weight per piece (excluding packing)	60.99 g
Customs tariff number	39269097
Country of origin	DE

# G-INB-M32-M68N-PEPDS-LG - Cable gland



1415176

<https://www.phoenixcontact.com/gb/products/1415176>

## Technical data


### Product properties

Product type	Cable screw gland
Application	Standard
No. of conductors	1
Type	with bend protection sleeve
Manufacturer	WISKA
Manufacturer Designation	ESKVS 32
Shielded	no
Execution of the strain relief	A

### Characteristics

Category of shock impact	4
Design, Strain relief	A

### Dimensions

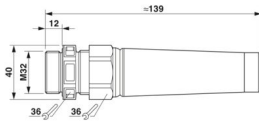Dimensional drawing	
Length	138 mm
Length of the connecting thread	12 mm
Hole diameter	32.1 mm ... 32.3 mm
Wrench size, union nut	36 mm
Wrench size, support	36 mm
Hexagon angular dimension	40 mm
Thread type connection side	M32 x 1.5
Thread pitch	1.5 mm

### Connection data

Tightening torque	6 Nm (Union nut: EN 62444)
	15 Nm (Support: EN 62444)

### Material specifications

Color	light gray (RAL 7035)
Material	PA (Screw connection, halogen-free)
Seal material	EPDM
Glow wire ignition temperature GWIT according to EN 60695-2-13	750
Material for screw connection	PA

# G-INB-M32-M68N-PEPDS-LG - Cable gland



1415176

<https://www.phoenixcontact.com/gb/products/1415176>

## Cable/line

External cable diameter Cable 1	13 mm ... 21 mm
Halogen-free	yes

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP68 (5 bar / 0.5 h)
	IP69 (DIN EN 60529 / IEC 60529)
Ambient temperature (operation)	-40 °C ... 100 °C (static)

# G-INB-M32-M68N-PEPDS-LG - Cable gland




1415176

<https://www.phoenixcontact.com/gb/products/1415176>

## Drawings

Dimensional drawing

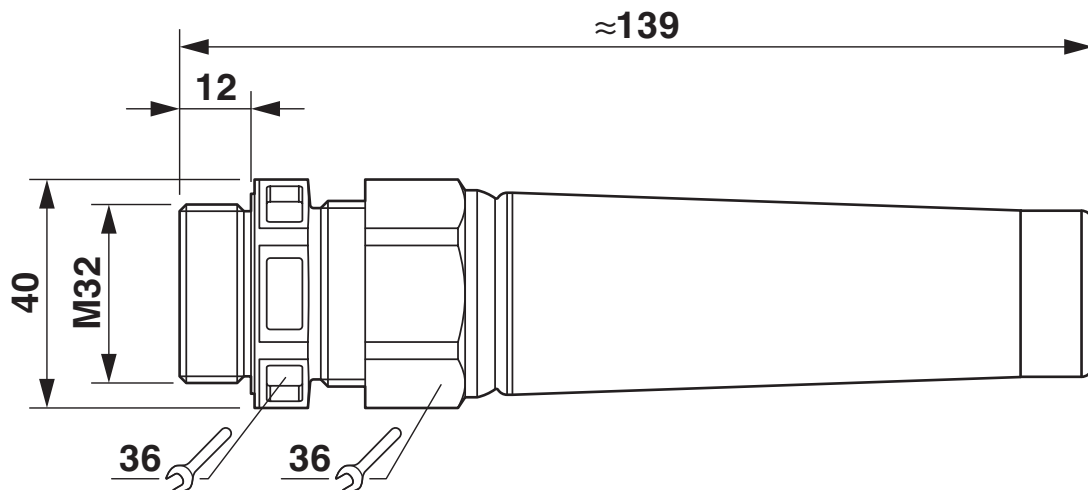

# G-INB-M32-M68N-PEPDS-LG - Cable gland



1415176

<https://www.phoenixcontact.com/gb/products/1415176>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/1415176>



**cUL Recognized**

Approval ID: E179850



**UL Recognized**

Approval ID: E179850



**GOST-R**

Approval ID: POCC DE.A\*98.H12052

# G-INB-M32-M68N-PEPDS-LG - Cable gland



1415176

<https://www.phoenixcontact.com/gb/products/1415176>

## Classifications

### ECLASS

ECLASS-13.0	27140801
-------------	----------

### ETIM

ETIM 9.0	EC000441
----------	----------

### UNSPSC

UNSPSC 21.0	39121300
-------------	----------

# G-INB-M32-M68N-PEPDS-LG - Cable gland



1415176

<https://www.phoenixcontact.com/gb/products/1415176>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd  
Halesfield 13, Telford  
Shropshire, TF7 4PG  
01952 681700  
[info@phoenixcontact.co.uk](mailto:info@phoenixcontact.co.uk)