

# Rittal – The System.

Faster – better – everywhere.

## ► Punched section with mounting flange, 23 x 64 mm for VX – VX 8617.120

Date : Jun 14, 2019

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# Punched section with mounting flange, 23 x 64 mm for VX – VX 8617.120

created: 14.06.2019 on [www.rittal.com/com-en](http://www.rittal.com/com-en)

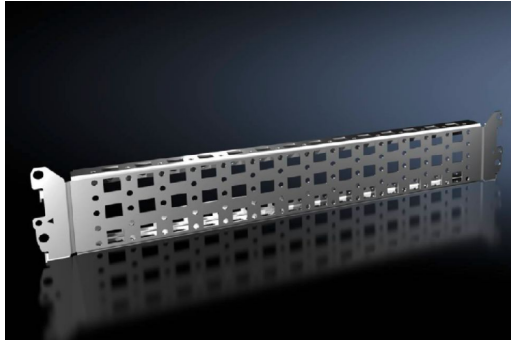

## Product description

<b>Description:</b>	For variable, individual interior installation of the enclosure frame on the inner mounting level.
<b>Benefits:</b>	Simply locate into the system punchings and screw-fasten System punchings on all four sides With slots at the top and bottom for cage nuts, for attaching your own components via metric screws
<b>Material:</b>	Sheet steel
<b>Surface finish:</b>	Zinc-plated
<b>Supply includes:</b>	Assembly parts

## Product features

<b>To fit:</b>	Width/height/depth: 500 mm
<b>Installation options:</b>	Base/plinth VX in the width and depth, combined with an base/plinth installation bracket On identical punched sections with mounting flanges
<b>Packs of:</b>	4 pc(s).
<b>Weight/pack:</b>	1.97 kg
<b>Copper weight (kg per piece):</b>	0

**EAN:** 4028177829121

---

**Customs tariff number:** 94039010

---

**ETIM 6.0:** EC002625

---

**ETIM 5.0:** EC002625

---

**eCl@ss 8.0/8.1:** 27189234

---

**eCl@ss 7.0/7.1:** 23159101

---

**eCl@ss 6.0/6.1:** 23159101

---

**eCl@ss 5.1/5.1.4:** 27189250

---

**Product description:** VX Punched section, with mounting flange 23 x 64 mm, for inner mounting level, for W/H/D: 500 mm

---