


■ Features

- High accuracy
- Long life(More than 5 years in normal air)
- Continuous calibration and maintenance not required
- Calibration gas not required
- From ppm to 95%O₂, Wide measurement range
- No interference to media
- No pressure dependence

■ Applications

- Oxygen concentrator
- Nitrogen purifier
- Alarm for oxygen shortage
- Culture oven or Incubator
- Food packaging, preservation & logistics
- Combustion control
- Soldering system

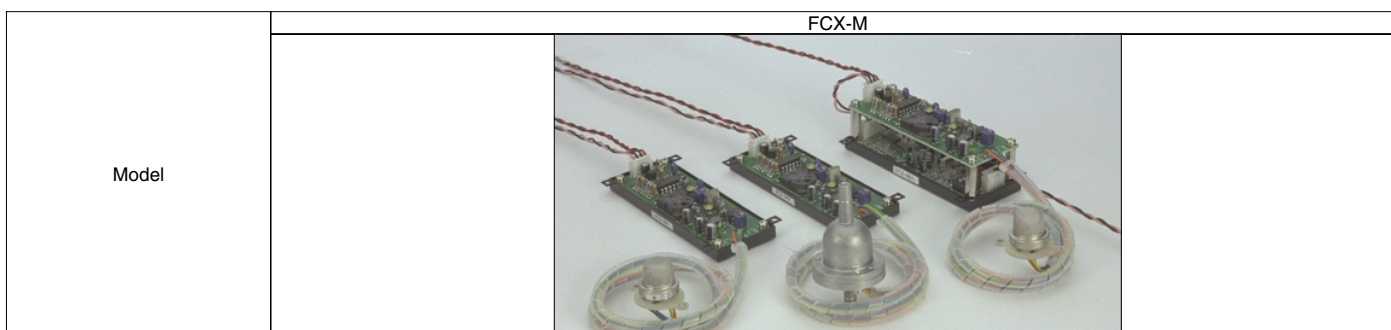

■ Specifications

Item	Unit	FCX-						
		MP-AC	MQ-AC	MV	MW	MWGP-1/2	MVGP-2	MEP2
Measurement range	%O ₂	50~1000 ^{※3}	0.05~1.0	0.1~25	0.1~95	75~95	15~25	0.1~25
Accuracy	%FS	±5.0		±1.0	±0.5	±2.0		±1.0
Response time ^{※4}	secs.	90			30			
Output	mV	50~1000		0~250	1~2700	1235~2700	145~256	4~20 ^{※5}
		$= -999.5 \times 10^3 \times \ln \left[1 - \frac{O_2\%}{10^6} \right]$	$= -99.5 \times 10^3 \times \ln \left[1 - \frac{O_2\%}{100} \right]$	$= -891 \times \ln \left[1 - \frac{O_2\%}{100} \right]$			$= -57 \times \ln \left[1 - \frac{O_2\%}{10^6} \right]$ ⁺⁴	
Power supply ^{※6}	Vdc	5±0.2				5+0.1/—0.25		12±3
Power consumption	W	5				4		3
Operating temperature	°C	—10~50				0~60		—10~50
Operating humidity ^{※7}	%RH	0~85						
Dimensions (w × h × l)	mm	50 × 16 × 104				80 × 23 × 80/40	80 × 23 × 40	45 × 20 × 52
Weight	g	65						40

Item	Unit	FCX-	
		MVL	MWL
Measurement range	%O ₂	0.1~25	0.1~95
Accuracy	%FS	±1.0	±0.5
Response time ^{※4}	secs.	30	
Output	mV	1~250	1~950
		$= 10 \times O_2\%$	
Power supply ^{※6}	Vdc	5±0.2	
Power consumption	W	5	
Operating temperature	°C	—10~50	
Operating humidity ^{※7}	%RH	0~85	
Dimensions (w × h × l)	mm	50 × 38 × 104	
Weight	g	120	

Instruction for use ;

1. Sensor modules are calibrated with N₂-O₂ balance gases. Other gases may affect the sensor performance by increase errors.
2. Do NOT to separate the sensing element from the circuit board and lead wires length must be remained unchanged.
3. Do NOT use in harsh environmental conditions containing halogen atoms(F, Cl, Br), SO_x, NO_x or H₂S, which make the sensor inferior in a short time.
4. Flammable gases, such as H₂, CO, methane or Alcohol make a big error. And please note that the temperature at the sensing part goes up to 450degrees C during the operation, which may exceed the flash point and cause explosion.
5. Silicone gas or vapour including Siloxane also make the sensor inferior in a short time.
6. Dust or oil mist cause failures of the products, errors or a slow response. They must be eliminated with a filter.
7. Water drop's contact may give a damage to the sensor. It must be also eliminated with a filter.
8. Temperature at the sensor mesh surface reach 50~80degrees C during operation. Please take precautions against burning yourself.
9. A strong shock such as drop may cut internal wires or break the sensor pellet which is made of ceramic. Do NOT apply a shock of 10G or more to the sensor.
10. The warranty period is one year from the ex-factory date. This warranty does NOT apply to the sensors as follows :
 1.) There are any defects or faults caused by an improper dealing during the transportation after Fujikura has delivered the sensor to a place where the buyer had instructed. 2.) There are any defects or faults caused by the buyer's misuses, abuse or neglect. 3.) The buyer fixed or remake the sensors. 4.) There are any identical or consequential damages which are given in the usage. 5.) There are any defects or faults caused by natural disasters such as fire, earthquake, flood or thunder.
11. Fujikura's oxygen sensors are NOT developed, designed, manufactured, sold, intended or authorized for use as components in systems intended for the surgical implant into the body, other applications intended to support or sustain life, fail-safe applications in which the failures, breakages or where misused of the sensors could create a situation where personal injury or death, explosion or fire, or serious social damage may occur. Fujikura and its subcontractors and distributors accept NO responsibility the buyer's selection and use of Fujikura's oxygen sensors without Fujikura's written approval in any such unintended or unauthorized and situation where personal injury or death, explosion or fire, or serious social damage may occur.
12. A fail-safe design is strongly required when customers use the sensor in medical applications or alarm systems for oxygen shortage even except above.

- ※1 : Depends on operating environment.
 ※2 : Annual calibration or maintenance are still recommended.
 ※3 : ppm
 ※4 : From 10 to 90%step change.
 ※5 : mA
 ※6 : Regulated DC power supply, The current capacity must be 1A
 ※7 : Without vapour condensation

Note ; Please read above instructions before using the sensor.
 Fujikura reserves the right to change specifications without notice.

Fujikura Ltd.

If you have any questions regarding technical issues or specifications, please contact us.
 Sensor Engineering Department, Akita Branch Office
 Phone +81-(0)18-826-1115 Fax. +81-(0)18-826-1150
 E-mail : sensor@fujikura.co.jp