

Safety relay JSBT4



6

Safety relay with synchronised dual input channels (within 0.5s)

The JSBT4 has two inputs, both of which have to be closed in order to keep the safety output contacts closed. A short circuit between inputs A and B will cause the output contacts to open. The inputs can be continuously short circuited without damaging the safety relay.

For the outputs to close, the test input must be closed. The test input is intended to monitor that contactors or valves have dropped/returned before a new start is permitted.

This test input must not be confused with the reset function required for gates that a person can walk through and where there is a high safety requirement (see JSBR4).

If the JSBT4 is used for safety Mats and safety Strips, the "stop" condition is given following detection of a short circuit. The safety mat, safety strip or the relay will not be damaged by a continuous short-circuit. This also provides the advantage that if there is a failure between inputs A and B in the installation, the safety relay will not be damaged.

Safety level

The JSBT4 has a twin supervised safety function. Component failure, short-circuit or external disturbance (e.g. loss of power supply) will not prevent the safe function of the relay. Safety category level 3 or 4, depending on use.

The true two-channel safety function has the advantage that the cabling installation demands for safety can be reduced,

Approvals:



Safety relay for:

- Emergency stops
- Three position devices
- Interlocked Hatches
- Safety mats
- Contact strips
- Foot operated switches

Features:

- Dual input channels synchronism 0.5 s
- Test input
- Width 45 mm
- LED indications for power on, inputs and outputs
- 3 NO/1NC relay outputs
- Supply 24 VDC
- Quick release connector blocks

due to the fact that a short-circuit between the inputs will directly open the relay's safety outputs.


Regulations and standards

The JSBT4 is designed and approved in accordance with appropriate directives and standards. See technical data.

Connection examples

For examples of how our safety relays can solve various safety problems, please see the section "Connection examples".

Technical description – JSBT4

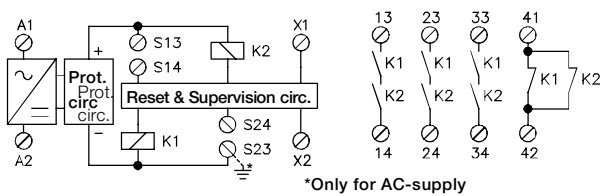

The electrical supply is connected across A1 and A2. After Voltage reduction and Rectification (AC-versions) or reverse polarity protection (DC-version) there is an overload protection-circuit.

When the inputs S13-S14 and S23-S24 are closed within 0.5 seconds of each other the relays K1 and K2 are energized. A dual stop signal is given, K1 and K2 de-energize, when there is a short circuit between or an opening of the inputs or at power loss. If one input is opened the other one also has to be opened in order to activate K1 and K2 again. The test circuit, X1 - X2, has to be closed in order to activate the outputs, thereafter the test circuit can be opened or closed continuously. If the test circuit is closed after the inputs there is no requirement to close them within 0.5 seconds of each other.

The internal supervision circuit monitors the two Inputs and relays K1, K2. The stop function then fulfils the requirement that one failure (short circuit, component, external disturbance) shall not prevent the safe function of the JSBT4.

The safety outputs consist of contacts from K1 and K2 connected internally in series across terminals 13 - 14, 23 - 24 and 33 - 34. These contacts are used to cut the power to components which stop or prevent hazardous movements/functions. It is recommended that all switched loads are adequately suppressed and/or fused in order to provide additional protection for the safety contacts.

The NC output 41 - 42 should only be used for monitoring purposes e.g. Indication lamp or PLC input etc. The output contacts are closed until the module is reset.

NOTE! Output 41-42 is intended for indication purposes only, e.g. gate opened. No load between S14 and S24 allowed.

Technical data – JSBT4

Article number	JSBT4 24 VDC	2TLA010004R0000
	JSBT4 24 VAC	2TLJ010004R0200
	JSBT4 230 VAC	2TLJ010004R0500
Colour		Grey
Power supply		24 VDC ±15%
Power consumption		BT50 1.4W/BT50T 1.8W
Relay outputs		3 NO + 1 NC
Max. switching capacity		
Resistive load AC		6A/250 VAC/1500 VA
Inductive load AC		AC15 240VAC 2A
Resistive load DC		6A/24 VDC/150 W
Inductive load DC		DC13 24VDC 1A
Max. res. load total switching capacity		12A distributed on all contacts
Min. load		10mA/10 V (if load on contact has not exceeded 100 mA)
Contact material		Ag + Au flash
Fuses output (external)		5A gL/gG
Conditional short-circuit current (1 kA)		6A gG
Max. Input wire res. at nom. voltage		300 Ohm (S13 - S14 and S23 - S24)
Response time at deactivation		< 20 ms, 145 ms with switched supply/power loss
Terminals (max. screw torque 1 Nm)		
Single strand		1x4 mm ² / 2x1.5 mm ²
Conductor with socket contact		1x2.5 mm ² / 2x1 mm ²
Mounting		35 mm DIN-rail
Protection class		IP40 / IP20 IEC 60529
Operating temperature range		-10°C to +55°C (with no icing or condensation)
Impulse withstand voltage		2.5kV
Pollution degree		2
Operating humidity range		35% to 85%
LED indication		Electrical Supply, Inputs, Outputs
Weight		350 g (24 VDC), 460 g (24-230 VAC)
Values (With Proof test interval 1 year)		Safety Category 4 according to, PL e, SIL 3, PFD _h , 1.51E-08
Conformity		2006/42/EC, 2006/95/EC, 2004/108/EC, EN 62061:2005, EN ISO 13849-1:2008

Electrical connection – JSBT4

