

**CHERRY** 



**G80-11900**

DATASHEET

# CHERRY G80-11900

The multifunctional TouchBoard is the perfect solution for limited spaces in situations requiring the functions of a "mouse". Particularly in hard industrial applications, the CHERRY keyboard shows what it is made of. The model combines outstanding quality with long service life and precise, easy-to-operate touchpad.



## HIGHLIGHTS

- Individual keys with Gold Crosspoint contacts (MX technology)
- Designed for continuous usage - over 100 mill. confirmations per key
- Robust and reliable
- Space-saving and ergonomic
- Ideal for limited space and 19" applications
- Can be used with the standard drivers of the operating system
- USB keyboard: the following keys can be programmed freely using KeyM@n software (software macros) in 3 levels (single confirmation in combination with "CTRL", in combination with "SHIFT"): function keys "F1"- "F12", "INSERT", "DELETE", "POSITION1", "END", "PAGE-UP", "PAGE-DOWN", "PRINT", "PAUSE", comma and zero in the numeric field.

## SCOPE OF DELIVERY

- Manual
- Keyboard

# TECHNICAL DATA

## PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>

## TEMPERATURE

Min. operating temperature	0 °C
Max. operating temperature	50 °C


## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no

## SWITCHES: CHERRY MX1A-1XXX KS MX

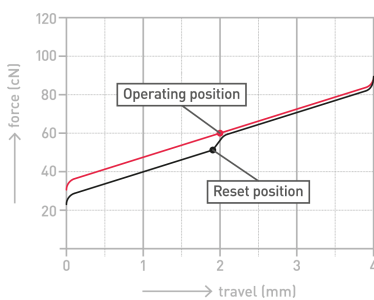

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black

Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN
Initial force	30 cN
Final force	110 cN

# PRODUCT VARIANTS

PART NUMBER	LAYOUT	COLOUR	SWITCHES
G80-11900LTMDE-2	DE (Germany)	black	CHERRY MX BLACK
G80-11900LTMEU-2	EU (USA+ €- Symbol)	black	CHERRY MX BLACK
G80-11900LTMFR-2	FR (France)	black	CHERRY MX BLACK
G80-11900LTMUS-2	US (USA)	black	CHERRY MX BLACK
G80-11900LTMXY-0		black	CHERRY MX BLACK
G80-11900LUMBE-2	BE (Belgium)	light-grey	CHERRY MX BLACK
G80-11900LUMCH-2	CH (Switzerland)	black	CHERRY MX BLACK
G80-11900LUMDE-2	DE (Germany)	black	CHERRY MX BLACK
G80-11900LUMES-2	ES (Spain)	black	CHERRY MX BLACK
G80-11900LUMEU-2	EU (USA+ €- Symbol)	black	CHERRY MX BLACK
G80-11900LUMFA-2		black	CHERRY MX BLACK
G80-11900LUMFR-2	FR (France)	black	CHERRY MX BLACK
G80-11900LUMGB-2	GB (United Kingdom)	black	CHERRY MX BLACK
G80-11900LTMDE-0	DE (Germany)	grey	CHERRY MX BLACK
G80-11900LTMEU-0	EU (USA+ €- Symbol)	grey	CHERRY MX BLACK
G80-11900LTMFR-0	FR (France)	grey	CHERRY MX BLACK
G80-11900LTMUS-0	US (USA)	grey	CHERRY MX BLACK
G80-11900	BE (Belgium)	light-grey	CHERRY MX BLACK
G80-11900LUMCH-0	CH (Switzerland)	light-grey	CHERRY MX BLACK
G80-11900LUMDE-0	DE (Germany)	light-grey	CHERRY MX BLACK
G80-11900LUMES-0	ES (Spain)	light-grey	CHERRY MX BLACK

<b>PART NUMBER</b>	<b>LAYOUT</b>	<b>COLOUR</b>	<b>SWITCHES</b>
G80-11900LUMEU-0	EU (USA+ €- Symbol)	light-grey	CHERRY MX BLACK
G80-11900	FR (France)	light-grey	CHERRY MX BLACK
G80-11900LUMGB-0	GB (United Kingdom)	light-grey	CHERRY MX BLACK

## G80-11900 [G80-11900LTMDE-2]



**Layout:** DE (Germany)

**Product colour:** Black

**Switches:** CHERRY MX BLACK

Part number	G80-11900LTMDE-2
EAN	4025112045127

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	<ul style="list-style-type: none"><li>- USB-A</li><li>- PS/2</li></ul>
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE

Min. operating temperature	0 °C
----------------------------	------


Max. operating temperature	50 °C
----------------------------	-------

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	105
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black

Bottom housing colour	black
Actuation force	60 cN
Initial force	30 cN
Final force	110 cN

## G80-11900 [G80-11900LTMEU-2]



**Layout:** EU (USA+ €-Symbol)  
**Product colour:** Black  
**Switches:** CHERRY MX BLACK

Part number	G80-11900LTMEU-2
EAN	4025112049514

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	<ul style="list-style-type: none"><li>- USB-A</li><li>- PS/2</li></ul>
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE

Min. operating temperature	0 °C
----------------------------	------

Max. operating temperature 50 °C

## CABLE

Cable length 175 cm

## KEYBOARD

Keycap material ABS

Key labeling Laser etching

Palm rest Palm rest not available

USB-Hub no

Number of keys 104

Illumination no

Adjustable feet integrated

Status LEDs in housing

Key technology Mechanical

Service life per key (in million strokes) 50 mio. actuations


Max. current consumption (mA) of keyboard 36 mA

Keyboard format Full-size (100%)

N-Key Rollover no

Anti-ghosting no

Key encryption no



## SWITCHES: MX1A-1GFL

Type mechanical, MX1A

Operating life >100m.

stem colour black

Pre-Travel 2 mm

RGB no

Spring Stainless steel

Cover colour black

Bottom housing colour	black
Actuation force	60 cN
Initial force	30 cN
Final force	110 cN

## CHERRY G80-11900 [G80-11900LTMFR-2]



**Layout:** FR (France)

**Product colour:** Black

**Switches:** CHERRY MX BLACK

Part number	G80-11900LTMFR-2
EAN	4025112055638

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	<ul style="list-style-type: none"><li>- USB-A</li><li>- PS/2</li></ul>
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE

Min. operating temperature	0 °C
----------------------------	------

Max. operating temperature 50 °C

## CABLE

Cable length 175 cm

## KEYBOARD

Keycap material ABS

Key labeling Laser etching

Palm rest Palm rest not available

USB-Hub no

Number of keys 105

Illumination no

Adjustable feet integrated

Status LEDs in housing

Key technology Mechanical

Service life per key (in million strokes) 50 mio. actuations


Max. current consumption (mA) of keyboard 36 mA

Keyboard format Full-size (100%)

N-Key Rollover no

Anti-ghosting no

Key encryption no



## SWITCHES: MX1A-1GFL

Type mechanical, MX1A

Operating life >100m.

stem colour black

Pre-Travel 2 mm

RGB no

Spring Stainless steel

Cover colour black

Bottom housing colour	black
Actuation force	60 cN
Initial force	30 cN
Final force	110 cN

## G80-11900 [G80-11900LTMUS-2]



**Layout:** US (USA)

**Product colour:** Black

**Switches:** CHERRY MX BLACK

Part number	G80-11900LTMUS-2
EAN	4025112045134
UPC	840183600082

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	<ul style="list-style-type: none"><li>- USB-A</li><li>- PS/2</li></ul>
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

## TEMPERATURE


Min. operating temperature	0 °C
Max. operating temperature	50 °C

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	104
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no

Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN
Initial force	30 cN
Final force	110 cN

# CHERRY G80-11900 [G80-11900LTMXY-0]



**Product colour:** Black  
**Switches:** CHERRY MX BLACK

Part number	G80-11900LTMXY-0
EAN	4025112060427

## PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	<ul style="list-style-type: none"><li>- USB-A</li><li>- PS/2</li></ul>
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

## TEMPERATURE

Min. operating temperature	0 °C
----------------------------	------


Max. operating temperature 50 °C

## CABLE

Cable length 175 cm

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black

Actuation force	60 cN
Initial force	30 cN
Final force	110 cN

## G80-11900 [G80-11900LUMBE-2]



**Layout:** BE (Belgium)  
**Product colour:** Black  
**Switches:** CHERRY MX BLACK

Part number	G80-11900LUMBE-2
EAN	4025112050848

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE


Min. operating temperature	0 °C
Max. operating temperature	50 °C

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	105
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN

Initial force	30 cN
Final force	110 cN

## G80-11900 [G80-11900LUMCH-2]



**Layout:** CH (Switzerland)  
**Product colour:** Black  
**Switches:** CHERRY MX BLACK

Part number	G80-11900LUMCH-2
EAN	4025112050824

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE


Min. operating temperature	0 °C
Max. operating temperature	50 °C

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	105
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN

Initial force	30 cN
Final force	110 cN

## G80-11900 [G80-11900LUMDE-2]



**Layout:** DE (Germany)

**Product colour:** Black

**Switches:** CHERRY MX BLACK

Part number	G80-11900LUMDE-2
EAN	4025112049958

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE


Min. operating temperature	0 °C
Max. operating temperature	50 °C

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	105
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN

Initial force	30 cN
Final force	110 cN

## G80-11900 [G80-11900LUMES-2]



**Layout:** ES (Spain)

**Product colour:** Black

**Switches:** CHERRY MX BLACK

Part number	G80-11900LUMES-2
EAN	4025112068003

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE


Min. operating temperature	0 °C
Max. operating temperature	50 °C

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	105
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN

Initial force 30 cN

Final force 110 cN

## G80-11900 [G80-11900LUMEU-2]



**Layout:** EU (USA+ €-Symbol)  
**Product colour:** Black  
**Switches:** CHERRY MX BLACK

Part number	G80-11900LUMEU-2
EAN	4025112050763
UPC	840183600105

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE

Min. operating temperature	0 °C
----------------------------	------

Max. operating temperature 50 °C

## CABLE

Cable length 175 cm

## KEYBOARD

Keycap material ABS

Key labeling Laser etching

Palm rest Palm rest not available

USB-Hub no

Number of keys 104

Illumination no

Adjustable feet integrated

Status LEDs in housing

Key technology Mechanical

Service life per key (in million strokes) 50 mio. actuations


Max. current consumption (mA) of keyboard 36 mA

Keyboard format Full-size (100%)

N-Key Rollover no

Anti-ghosting no

Key encryption no



## SWITCHES: MX1A-1GFL

Type mechanical, MX1A

Operating life >100m.

stem colour black

Pre-Travel 2 mm

RGB no

Spring Stainless steel

Cover colour black

Bottom housing colour	black
Actuation force	60 cN
Initial force	30 cN
Final force	110 cN

## CHERRY G80-11900 [G80-11900LUMFA-2]



**Product colour:** Black  
**Switches:** CHERRY MX BLACK

Part number	G80-11900LUMFA-2
EAN	4025112077043
UPC	840183600112

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE

Min. operating temperature	0 °C
----------------------------	------


Max. operating temperature 50 °C

## CABLE

Cable length 175 cm

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black

Actuation force	60 cN
Initial force	30 cN
Final force	110 cN

## G80-11900 [G80-11900LUMFR-2]



**Layout:** FR (France)

**Product colour:** Black

**Switches:** CHERRY MX BLACK

Part number	G80-11900LUMFR-2
EAN	4025112050800

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE


Min. operating temperature	0 °C
Max. operating temperature	50 °C

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	105
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no

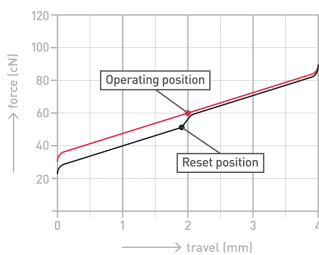

## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN

Initial force 30 cN

Final force 110 cN

## G80-11900 [G80-11900LUMGB-2]



**Layout:** GB (United Kingdom)  
**Product colour:** Black  
**Switches:** CHERRY MX BLACK

Part number	G80-11900LUMGB-2
EAN	4025112050787

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE


Min. operating temperature	0 °C
Max. operating temperature	50 °C

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	105
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no

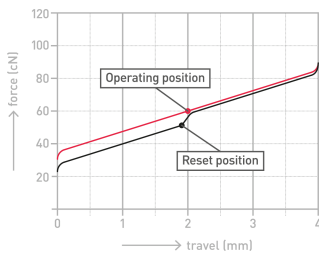

## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN

Initial force	30 cN
Final force	110 cN

# CHERRY G86-71511 [G80-11900LTMDE-0]



**Layout:** DE (Germany)

**Product colour:** Grey

**Switches:** CHERRY MX BLACK

---

Part number	G80-11900LTMDE-0
-------------	------------------

---

EAN	4025112022029
-----	---------------

---

## PRODUCT INFORMATION

---

Model number	MX11900
--------------	---------

---

Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
-------------	--

---

Warranty	1 additional year voluntary limited manufacturers warranty
----------	--

---

Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
-------------------	--

---

Software support	CHERRY KEYS
------------------	-------------

---

Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
------------------	---

---

System Requirements-Hardware	<ul style="list-style-type: none"><li>- USB-A</li><li>- PS/2</li></ul>
------------------------------	--

---

Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g
---------------------------	-----------------------------------

---

## TEMPERATURE

---

Min. operating temperature	0 °C
----------------------------	------

---

Max. operating temperature 50 °C

## CABLE

Cable length 175 cm

## KEYBOARD

Keycap material ABS

Key labeling Laser etching

Palm rest Palm rest not available

USB-Hub no

Number of keys 105

Illumination no

Adjustable feet integrated

Status LEDs in housing

Key technology Mechanical

Service life per key (in million strokes) 50 mio. actuations


Max. current consumption (mA) of keyboard 36 mA

Keyboard format Full-size (100%)

N-Key Rollover no

Anti-ghosting no

Key encryption no



## SWITCHES: MX1A-1GFL

Type mechanical, MX1A

Operating life >100m.

stem colour black

Pre-Travel 2 mm

RGB no

Spring Stainless steel

Cover colour black

Bottom housing colour	black
Actuation force	60 cN
Initial force	30 cN
Final force	110 cN

## G80-11900 [G80-11900LTMEU-0]



**Layout:** EU (USA+ €-Symbol)  
**Product colour:** Grey  
**Switches:** CHERRY MX BLACK

---

Part number	G80-11900LTMEU-0
EAN	4025112040177

---

### PRODUCT INFORMATION

---

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	<ul style="list-style-type: none"><li>- USB-A</li><li>- PS/2</li></ul>
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

---

### TEMPERATURE

---

Min. operating temperature	0 °C
----------------------------	------

---


Max. operating temperature	50 °C
----------------------------	-------

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	104
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black

Bottom housing colour	black
Actuation force	60 cN
Initial force	30 cN
Final force	110 cN

# CHERRY G86-71511 [G80-11900LTMFR-0]



**Layout:** FR (France)  
**Product colour:** Grey  
**Switches:** CHERRY MX BLACK

---

Part number	G80-11900LTMFR-0
EAN	4025112022043

---

## PRODUCT INFORMATION

---

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	<ul style="list-style-type: none"><li>- USB-A</li><li>- PS/2</li></ul>
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

---

## TEMPERATURE

---

Min. operating temperature	0 °C
----------------------------	------

---

Max. operating temperature 50 °C

## CABLE

Cable length 175 cm

## KEYBOARD

Keycap material ABS

Key labeling Laser etching

Palm rest Palm rest not available

USB-Hub no

Number of keys 105

Illumination no

Adjustable feet integrated

Status LEDs in housing

Key technology Mechanical

Service life per key (in million strokes) 50 mio. actuations


Max. current consumption (mA) of keyboard 36 mA

Keyboard format Full-size (100%)

N-Key Rollover no

Anti-ghosting no

Key encryption no



## SWITCHES: MX1A-1GFL

Type mechanical, MX1A

Operating life >100m.

stem colour black

Pre-Travel 2 mm

RGB no

Spring Stainless steel

Cover colour black

Bottom housing colour	black
Actuation force	60 cN
Initial force	30 cN
Final force	110 cN

# CHERRY G86-71511 [G80-11900LTMUS-0]



**Layout:** US (USA)

**Product colour:** Grey

**Switches:** CHERRY MX BLACK

Part number	G80-11900LTMUS-0
EAN	4025112022067
UPC	840183600075

## PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	<ul style="list-style-type: none"><li>- USB-A</li><li>- PS/2</li></ul>
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

## TEMPERATURE


Min. operating temperature	0 °C
Max. operating temperature	50 °C

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	104
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no

Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN
Initial force	30 cN
Final force	110 cN

## CHERRY G86-71511 [G80-11900]



**Layout:** BE (Belgium)  
**Product colour:** Grey  
**Switches:** CHERRY MX BLACK

---

Part number	G80-11900
-------------	-----------

---

### PRODUCT INFORMATION

---

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A

---

### TEMPERATURE

---

Min. operating temperature	0 °C
Max. operating temperature	50 °C


---

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	105
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN

Initial force	30 cN
Final force	110 cN

## G80-11900 [G80-11900LUMCH-0]



**Layout:** CH (Switzerland)

**Product colour:** Grey

**Switches:** CHERRY MX BLACK

Part number	G80-11900LUMCH-0
EAN	4025112050817

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE


Min. operating temperature	0 °C
Max. operating temperature	50 °C

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	105
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN

Initial force	30 cN
Final force	110 cN

## G80-11900 [G80-11900LUMDE-0]



**Layout:** DE (Germany)

**Product colour:** Grey

**Switches:** CHERRY MX BLACK

Part number	G80-11900LUMDE-0
EAN	4025112048616

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE


Min. operating temperature	0 °C
Max. operating temperature	50 °C

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	105
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN

Initial force	30 cN
Final force	110 cN

## G80-11900 [G80-11900LUMES-0]



**Layout:** ES (Spain)

**Product colour:** Grey

**Switches:** CHERRY MX BLACK

Part number	G80-11900LUMES-0
EAN	4025112068720

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE


Min. operating temperature	0 °C
Max. operating temperature	50 °C

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	105
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN

Initial force 30 cN

Final force 110 cN

## G80-11900 [G80-11900LUMEU-0]



**Layout:** EU (USA+ €-Symbol)  
**Product colour:** Grey  
**Switches:** CHERRY MX BLACK

Part number	G80-11900LUMEU-0
EAN	4025112050756
UPC	840183600099

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g
Min. operating temperature	0 °C

Max. operating temperature 50 °C

## CABLE

Cable length 175 cm

## KEYBOARD

Keycap material ABS

Key labeling Laser etching

Palm rest Palm rest not available

USB-Hub no

Number of keys 104

Illumination no

Adjustable feet integrated

Status LEDs in housing

Key technology Mechanical

Service life per key (in million strokes) 50 mio. actuations


Max. current consumption (mA) of keyboard 36 mA

Keyboard format Full-size (100%)

N-Key Rollover no

Anti-ghosting no

Key encryption no



## SWITCHES: MX1A-1GFL

Type mechanical, MX1A

Operating life >100m.

stem colour black

Pre-Travel 2 mm

RGB no

Spring Stainless steel

Cover colour black

Bottom housing colour	black
Actuation force	60 cN
Initial force	30 cN
Final force	110 cN

## CHERRY G86-71511 [G80-11900]



**Layout:** FR (France)

**Product colour:** Grey

**Switches:** CHERRY MX BLACK

---

Part number	G80-11900
-------------	-----------

---

### PRODUCT INFORMATION

---

Model number	MX11900
--------------	---------

---

Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
-------------	--

---

Warranty	1 additional year voluntary limited manufacturers warranty
----------	--

---

Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
-------------------	--

---

Software support	CHERRY KEYS
------------------	-------------

---

Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
------------------	---

---

System Requirements-Hardware	USB-A
------------------------------	-------

---

### TEMPERATURE

---

Min. operating temperature	0 °C
----------------------------	------

---

Max. operating temperature	50 °C
----------------------------	-------


---

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	105
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN

Initial force	30 cN
Final force	110 cN

## G80-11900 [G80-11900LUMGB-0]



**Layout:** GB (United Kingdom)  
**Product colour:** Grey  
**Switches:** CHERRY MX BLACK

Part number	G80-11900LUMGB-0
EAN	4025112050770

### PRODUCT INFORMATION

Model number	MX11900
Reliability	MCBF > 10 Mrd. Betätigungen MTBF > 874.000 Stunden
Warranty	1 additional year voluntary limited manufacturers warranty
Product approvals	<ul style="list-style-type: none"><li>- BSMI</li><li>- CE</li><li>- cURus</li><li>- FCC</li><li>- VCCI</li><li>- VDE</li><li>- China RoHS</li><li>- UKCA</li><li>- ICES-003 (Canada)</li></ul>
Software support	CHERRY KEYS
Operating system	<ul style="list-style-type: none"><li>- Windows 7</li><li>- Windows 8</li><li>- Windows 10</li><li>- Windows 11</li></ul>
System Requirements-Hardware	USB-A
Dimensions inc. packaging	445 mm × 250 mm × 45 mm   1,186 g

### TEMPERATURE


Min. operating temperature	0 °C
Max. operating temperature	50 °C

## CABLE

Cable length	175 cm
--------------	--------

## KEYBOARD

Keycap material	ABS
Key labeling	Laser etching
Palm rest	Palm rest not available
USB-Hub	no
Number of keys	105
Illumination	no
Adjustable feet	integrated
Status LEDs	in housing
Key technology	Mechanical
Service life per key (in million strokes)	50 mio. actuations
Max. current consumption (mA) of keyboard	36 mA
Keyboard format	Full-size (100%)
N-Key Rollover	no
Anti-ghosting	no
Key encryption	no



## SWITCHES: MX1A-1GFL

Type	mechanical, MX1A
Operating life	>100m.
stem colour	black
Pre-Travel	2 mm
RGB	no
Spring	Stainless steel
Cover colour	black
Bottom housing colour	black
Actuation force	60 cN

Initial force	30 cN
Final force	110 cN

## © Cherry Europe GmbH

Cherrystraße 2 · 91275 Auerbach/OPf. · Germany  
**cherry-world.com · cherry.de**

Sales Support · Technischer Support · eHealth Support

**+49 9643 - 2061 - 100**  
**www.cherry.de/de-de/kontakt**

Errors, technical changes and delivery options reserved. Technical information refers only to the specification of the products. Properties are not guaranteed.