

ENGLISH

Product Datasheet

Stock No: 1882476**Model Name:** SDM3045X**RS Pro DIGITAL MULTI-METER SDM3045X SERIES**

Product Overview

RSDM3045X is a digital multimeter designed with 4 ½ digits readings resolution and dual-display, especially fitting to the needs of high-precision, multifunction and automatic measurement.



Application fields

- Research Laboratory
- Development Laboratory
- Detection and Maintenance
- Calibration Laboratory
- Automatic Production Test

User-Friendly Design

- 4.3" TFT-LCD, 480*272
- Support double display, Chinese and English Menu
- Built-in help system makes information acquisition easier
- File management (support for U-disc and local storage)

Main Function

Basic Measurement Function

- DC Voltage: 200 mV ~ 1000 V
- DC Current: 200 µA ~ 10 A
- AC Voltage: True-RMS, 200 mV ~ 750 V
- AC Current: True-RMS, 20 mA ~ 10 A
- 2/4-Wire Resistance: 200Ω ~ 100 MΩ
- Capacitance: 2 nF ~ 10000 µF
- Continuity Test: Range is fixed at 2 kΩ
- Diode Test: Range is fixed at 2.0 V
- Frequency Measurement: 20 Hz ~ 1 MHz
- Period Measurement: 1 µs ~ 0.05 s
- Temperature: Support for TC and RTD sensor


Math Function

- Max, Min, Average, Standard Deviation, dBm/dB, Relative Measurement, Pass/Fail Histogram, Trending, Bar Chart


Main Feature

- Real 5½ digits readings resolution
- Up to 150 rdgs/s measurement speed
- True-RMS AC Voltage and AC Current measuring
- 1Gb Nand flash size, Mass storage configuration files and data files
- Built-in cold terminal compensation for thermocouple
- With easy, convenient and flexible any sensor measurement control software: Ultra Sensor
- Standard interface: USB Device, USB Host, LAN, USB-GPIB adaptor (only for RSDM3055A)
- Support remote control via commands and compatible with commands of main stream multimeters


Special Features

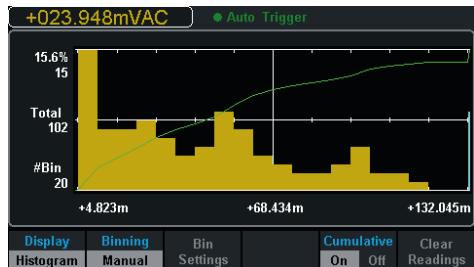


Historygram

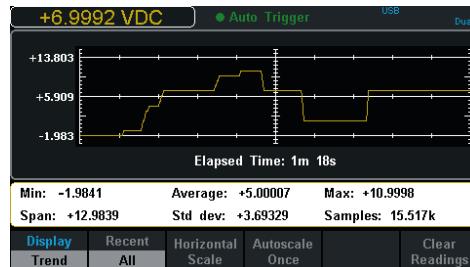

Trend Chart

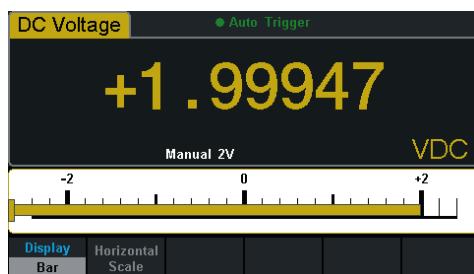

Bar Chart

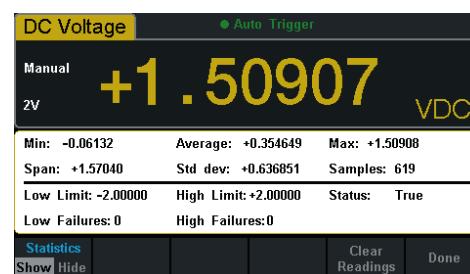

Statistics



Double Display



Hold Measurement



Back Interface

Specifications

DC Characteristic

Accuracy± (% of Reading + % of Range) [1]				
Function	Range ^[2]	Test current or Load voltage	1 Year 23°C±5°C	Temperature coefficient 0°C~18°C
DC Voltage	200 mV		0.015+ 0.004	0.0015+ 0.0005
	2 V		0.015+ 0.003	0.0010+ 0.0005
	20 V		0.015+ 0.004	0.0020+ 0.0005
	200 V		0.015+ 0.003	0.0015+ 0.0005
	1000 V ^[4]		0.015+ 0.003	0.0015+ 0.0005
DC Current	200 µA	< 8 mV	0.055+ 0.005	0.003+ 0.001
	2 mA	< 80 mV	0.055+ 0.005	0.002+ 0.001
	20 mA	< 0.05 V	0.095+ 0.020	0.008+ 0.001
	200 mA	< 0.5 V	0.070+ 0.008	0.005+ 0.001
	2 A	< 0.1 V	0.170+ 0.020	0.013+ 0.001
	10 A ^[5]	< 0.3 V	0.250+ 0.010	0.008+ 0.001
Resistance ^[3]	200 Ω	1 mA	0.030+ 0.005	0.0030+ 0.0006
	2 KΩ	1 mA	0.020+ 0.003	0.0030+ 0.0005
	20 KΩ	100 µA	0.020+ 0.003	0.0030+ 0.0005
	200 KΩ	10 µA	0.020+ 0.010	0.0030+ 0.0005
	2 MΩ	1 µA	0.040+ 0.004	0.0040+ 0.0005
	10 MΩ	200 nA	0.250+ 0.003	0.0100+ 0.0005
Diode Test	100 MΩ	200 nA 10 MΩ	1.75+ 0.004	0.2000+ 0.0005
	2.0 V ^[6]	1 mA	0.05+ 0.01	0.0050+ 0.0005
Continuity Test	2000 Ω	1 mA	0.05+ 0.01	0.0050+ 0.0005

Remarks:

- [1] Specifications are for 0.5 Hour warm-up, "Slow" measurement rate and calibration temperature 18°C~28°C.
- [2] 20% over range on all ranges except for DCV 1000 V, ACV 750 V, DCI 10 A and ACI 10 A.
- [3] Specifications are for 4-wire measure or 2-wire measure under "REF" operation. ±0.2Ω of extra errors will be generated if perform 2-wire measure without "REF" operation.
- [4] Plus 0.02 mV of error per 1 V after the first ±500 VDC.
- [5] 30 seconds OFF after 30 seconds ON is recommend for the continuous current that higher than DC 7 A or AC RMS 7 A.
- [6] Accuracy specifications are only for voltage measuring at input terminal. The typical value of current under measure is 1 mA. Voltage drop at diode junction may vary with current supply.

AC Characteristic

Accuracy \pm (% of Reading + % of Range) [1]

Function	Range ^[2]	Frequency Range	1 Year 23°C \pm 5°C	Temperature coefficient 0°C~18°C 28°C~50°C
True-RMS AC Voltage ^[3]	200 mV	20 Hz – 45 Hz	1.5 + 0.10	0.01 + 0.005
		45 Hz – 20 KHz	0.2 + 0.05	0.01 + 0.005
		20 KHz – 50 KHz	1.0 + 0.05	0.01 + 0.005
		50 KHz – 100 KHz	3.0 + 0.05	0.05 + 0.010
	2 V	20 Hz – 45 Hz	1.5 + 0.10	0.01 + 0.005
		45 Hz – 20 KHz	0.2 + 0.05	0.01 + 0.005
		20 KHz – 50 KHz	1.0 + 0.05	0.01 + 0.005
		50 KHz – 100 KHz	3.0 + 0.05	0.05 + 0.010
	20 V	20 Hz – 45 Hz	1.5 + 0.10	0.01 + 0.005
		45 Hz – 20 KHz	0.2 + 0.05	0.01 + 0.005
		20 KHz – 50 KHz	1.0 + 0.05	0.01 + 0.005
		50 KHz – 100 KHz	3.0 + 0.05	0.05 + 0.010
True-RMS AC Current ^[4]	750 V	20 Hz – 45 Hz	1.5 + 0.10	0.01 + 0.005
		45 Hz – 20 KHz	0.2 + 0.05	0.01 + 0.005
		20 KHz – 50 KHz	1.0 + 0.05	0.01 + 0.005
		50 KHz – 100 KHz	3.0 + 0.05	0.05 + 0.010
	20 mA	20 Hz – 45 Hz	1.5 + 0.10	0.015 + 0.015
		45 Hz – 2 KHz	0.50 + 0.10	0.015 + 0.006
		2 KHz – 10 KHz	2.50 + 0.20	0.015 + 0.006
		20 Hz – 45 Hz	1.5 + 0.10	0.015 + 0.005
	200 mA	45 Hz – 2 KHz	0.50 + 0.10	0.015 + 0.005
		2 KHz – 10 KHz	2.50 + 0.20	0.015 + 0.005
	2 A	20 Hz – 45 Hz	1.5 + 0.20	0.015 + 0.005
		45 Hz – 2 KHz	0.50 + 0.20	0.015 + 0.005
		2 KHz – 10 KHz	2.50 + 0.20	0.015 + 0.005
		20 Hz – 45 Hz	1.5 + 0.15	0.015 + 0.005
10 A ^[5]	10 A ^[5]	45 Hz – 2 KHz	0.50 + 0.15	0.015 + 0.005
		2 KHz – 10 KHz	2.50 + 0.20	0.015 + 0.005

Additional wave crest factor error (not Sine) [6]	
Wave crest coefficient	Error (% Range)
1-2	0.05
2-3	0.2

Remarks:

- [1] Specifications are for 0.5 Hour warm-up, "Slow" measurement rate and calibration temperature 18°C~28°C.
- [2] 20% over range on all ranges except for DCV 1000 V, ACV 750 V, DCI 10 A and ACI 10 A.
- [3] Specifications are for amplitude of sine wave input > 5% of range. For inputs from 1% to 5% of range and <50 kHz, add 0.1% of range extra error. For 50 kHz to 100 kHz, add 0.1% of range extra error.
- [4] Specifications are for sine wave input > 5% of range. 0.1% errors will be added when the range of input sine wave is 1% to 5% .
- 5] 30 seconds OFF after 30 seconds ON is recommended for the continuous current that higher than DC 7 A or AC RMS 7 A.

Frequency and Period Characteristic

Accuracy \pm (% of Reading + % of Range) [1]

Function	Range	Frequency Range	1 Year 23°C \pm 5°C	Temperature coefficient 0°C~18°C 28°C~50°C
Frequency /Period	200 mV 至 750 V ^[2]	20 Hz – 2 KHz	0.01+0.003	0.002+0.001
		2 KHz – 20 KHz	0.01+0.003	0.002+0.001
		20 KHz – 200 KHz	0.01+0.003	0.002+0.001
		200 KHz – 1 MHz	0.01+0.006	0.002+0.002

Remarks:

[1] Specifications are for 0.5 Hour warm-up.

[2] Except for special marks, the AC input voltage is 15% to 120% of range when <100 kHz and 30% to 120% of range when >100 kHz. 750 V range is limited to 750 Vrms.

Capacitance Characteristic

Accuracy \pm (% of Reading + % of Range) [1]

Function	Range ^[2]	Max Current	Testing Current 23°C \pm 5°C	Temperature coefficient 0°C~18°C 28°C~50°C
Capacitance	2 nF	200 nA	3+1.0	0.08+0.002
	20 nF	200 nA	1+0.5	0.02+0.001
	200 nF	2 μA	1+0.5	0.02+0.001
	2 μF	10 μA	1+0.5	0.02+0.001
	200 μF	100 μA	1+0.5	0.02+0.001
	10000 μF	1 mA	2+0.5	0.02+0.001

Remarks:

[1] Specifications are for 0.5 Hour warm-up and “REF” operation. Using of non-film capacitor may generate additional errors.

[2] Specifications are for from 1% to 120% on 2 nF range and ranges from 10% to 120% on other ranges.

Temperature Characteristic

Accuracy \pm (% of Reading + % of Range) [1]

Function	Probe Type	Probe Model	Working Temperature Range	1Year 23°C \pm 5°C	Temperature coefficient 0°C~18°C 28°C~50°C
Temperature	RTD ^[2] TC ^[3]	$\alpha=0.00385$	-200°C至 660°C	0.16°C	0.08+0.002
		B	0°C~1820°C	0.76 °C	0.14°C
		E	-270°C~1000°C	0.5°C	0.02°C
		J	-210°C~1200°C	0.5°C	0.02°C
		K	-270°C~1372°C	0.5°C	0.03°C
		N	-270°C~1300°C	0.5°C	0.04°C
		R	-270°C~1768°C	0.5°C	0.09°C
		S	-270°C~1768°C	0.6°C	0.11°C
		T	-270°C~400°C	0.5°C	0.03°C

Remarks:

[1] Specifications are for 0.5 Hour warm-up, not include probe error.

[2] Specifications are for 4-wire measure or 2-wire measure under “REF” operation.

[3] Built-in cold terminal compensation for thermocouple, accuracy is $\pm 1^\circ\text{C}$.

Measuring Method and other Characteristics

DC Voltage

Input Resistance	200 mV and 2 V Range 20 V, 200 V and 1000 V Range	10 MΩ or >10 GΩ selectable 10 MΩ ± 2%
Input Bias Current	<90 pA, 25°C	
Input Protection	1000 V on all ranges	
CMRR	120 dB (For the 1 KΩ unbalanced resistance in LO lead, max ±500 VDC)	
NMRR	60 dB at "slow" measurement rate 20 dB are added if open the "AC" filter.	

Resistance

Testing Method	4-wire resistance or 2-wire resistance selectable
Input Protection	1000 V on all ranges

DC Current

Shunt Resistor	200 μA sampling voltage < 8 mV 2 mA sampling voltage < 8 mV 1Ω for 20 mA, 200 mA 1Ω 0.01 Ω for 2 A, 10 A
Input Protection	Rear panel : accessible 10 A,250 V fast-melt fuse Internal :12 A,250 V slow-melt fuse

Continuity/Diode Test

Measurement Method	1 mA ±5% constant-current source or open-circuit voltage
Beeper	yes
Continuity Threshold	Adjustable
Input Protection	1000 V

True-RMS AC Voltage

Measurement Method	AC Coupled true RMS measure – up to 1000 V DC bias are permitted on every range.
Wave Crest Factor	≤3 at full scale
Input Impedance	1 MΩ ± 2% in parallel with <100 pF on all ranges
AC Filter Bandwidth	20 Hz ~ 100 KHz
CMRR	60 dB (For the 1 KΩ imbalance resistance among Lo lead and <60Hz, Max ±500 VDC)

True-RMS AC Current

Measurement Method	DC Coupled to the fuse and shunt; AC Coupled the True-RMS measurement (measures the AC components only)
Wave Crest Factor	≤3 at full scale
Max Input	<10A (include DC component)
Shunt Resistor	1Ω for 20 mA, 200 mA 1Ω; 0.01 Ω for 2 A, 10 A
Input Protection	Rear panel : accessible 10 A,250 V fast-melt fuse

Internal :12 A,250 V slow-melt fuse

Frequency/Period

Measurement Method	Reciprocal-counting technique, AC Coupled input, AC voltage or AC current measurement function
--------------------	--

Measure Attentions	Error are leaded into all frequency counters when measuring low voltage or low frequency signal.
--------------------	--

Capacitance Measuring

Measurement Method	Measure the rate of change of voltage generated during the current flowing the capacitance
--------------------	--

Connection Type	2-wire
-----------------	--------

Input Protection	1000 V on all ranges
------------------	----------------------

Temperature Measuring

Measurement Method	Support for TC and RTD types of sensor
--------------------	--

Trigger and Memory

Samples/Trigger	1~10000
-----------------	---------

Trigger Delay	6ms~10000ms optional
---------------	----------------------

External Trigger Input	Input Level	TTL compatible (High level when left input terminal is hanging in the air)
	Trigger Condition	Rising and Falling selectable
	Input Impedance	$\geq 20\text{K}\Omega /400\text{ pF}$, DC-coupled
	Min Pulse	500 us

VMC output	Level	TTL compatible
	Output Polarity	Straight and negative optional
	Output Impedance	200 Ω , typical

History Records

Volatile Memory	10K reading of history records
-----------------	--------------------------------

Nonvolatile Memory	1Gb Nand Flash, Mass storage configuration files and data files, Support U-disk external storage
--------------------	--

Math Functions

Min/Max/Average, dBm, dB, Pass/Fail, Relative, Standard deviation, Hold, histogram, Trend chart, Bar chart
--

General Specifications

Power Supply	
AC 100 V ~ 120 V	50/60 Hz
Consumption	20VA max
Mechanism	
Dimension	282mm×260mm×105mm
Weight	3.33Kg
Other Characteristics	
Display Screen	4.3" TFT-LCD with resolution 480*272
	Full accuracy from 0°C to 50°C, 80% RH and 40°C, non condensing
	Storage Temperature: -20°C-70°C
Operation Environment	Shock and Vibration: conforming to MIL-T-28800E, III , 5 level (only sine) Height above sea level: up to 3000 meters
Safety	Conforming to IEC61010-1:2001. Measure CAT I 1000V/CAT II 600V Class of pollution: 2
Remote Interface	USB-GPIB(only for RSDM3055A), 10/100Mbit LAN, USB2.0 Full Speed Device&Host
Programmer Language	Standard SCPI, compatible with commands of main stream multimeters
Warm Up Time	30 minutes

RS Stock No: 1882476