

SURGE SUPPRESSOR, RC COUPLING,  
AC 48...127V, DC 70...150V,  
FOR MOTOR CONTACTORS SZ S0,

**General technical data:**

<b>product brand name</b>		SIRIUS
<b>product designation</b>		surge suppressor
<b>Size of the contactor</b>		S0
<b>Design of the surge suppressor</b>		with RC elements
<b>Ambient temperature</b>		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60

**Control circuit:**

<b>Type of voltage / of the controlled supply voltage</b>		AC/DC
<b>Control supply voltage frequency</b>		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
<b>Control supply voltage / 1</b>		
• for DC		
• initial rated value	V	70
• final rated value	V	150
• at 50 Hz / for AC		
• initial rated value	V	48
• final rated value	V	127

- at 60 Hz / for AC
  - final rated value
  - initial rated value

V	127
V	48

### Installation/mounting/dimensions:

mounting position		any
Type of mounting		clip-on
Width	mm	30
Height	mm	19
Depth	mm	12

### Certificates/approvals:

Verification of suitability CE / UL / CSA / CCC

General Product Approval

Declaration of Conformity

Test Certificates



CSA



GOST



UL



EG-Konf.

[Special Test Certificate](#)

### Shipping Approval



ABS



DNV



GL



LRS



PRS



RINA

### Shipping Approval

other



RMRS

[Confirmation](#)



VDE

### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator




<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WWW/view/en/3RT2926-1CC00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RT2926-1CC00](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT2926-1CC00)

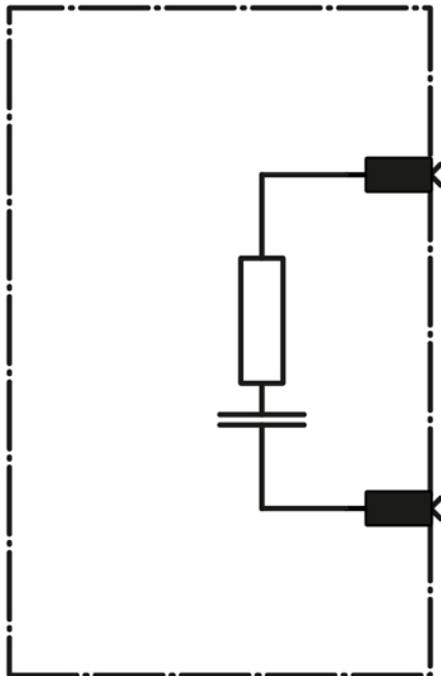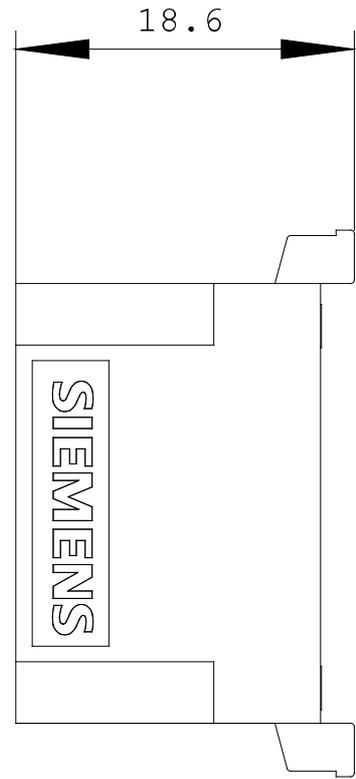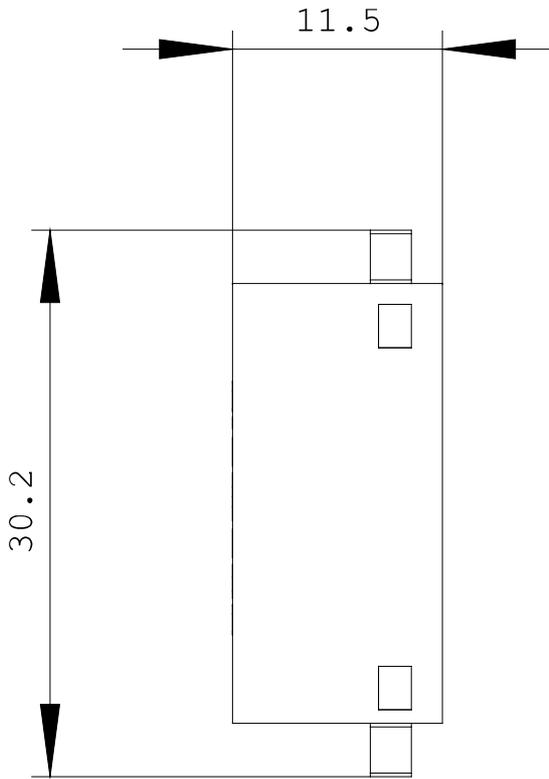

last change:

Jun 22, 2012