

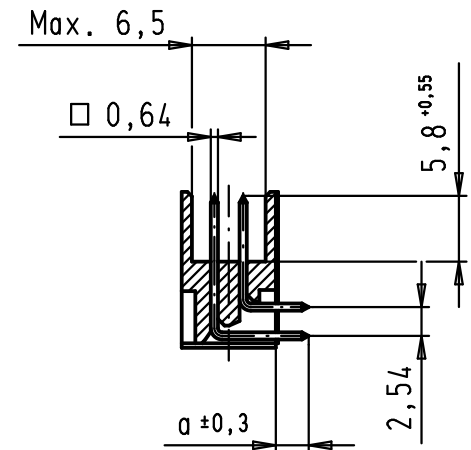

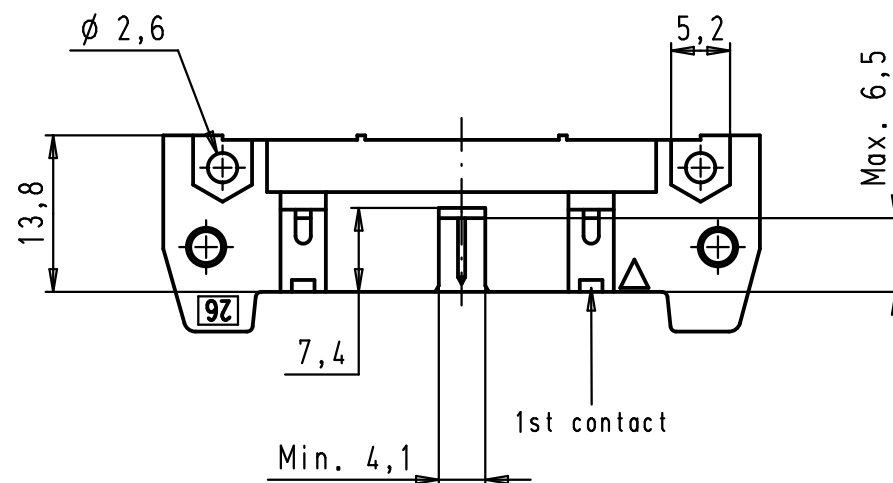
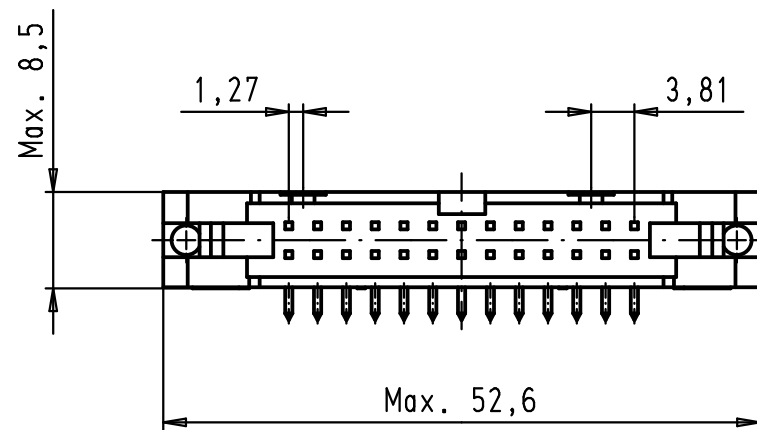


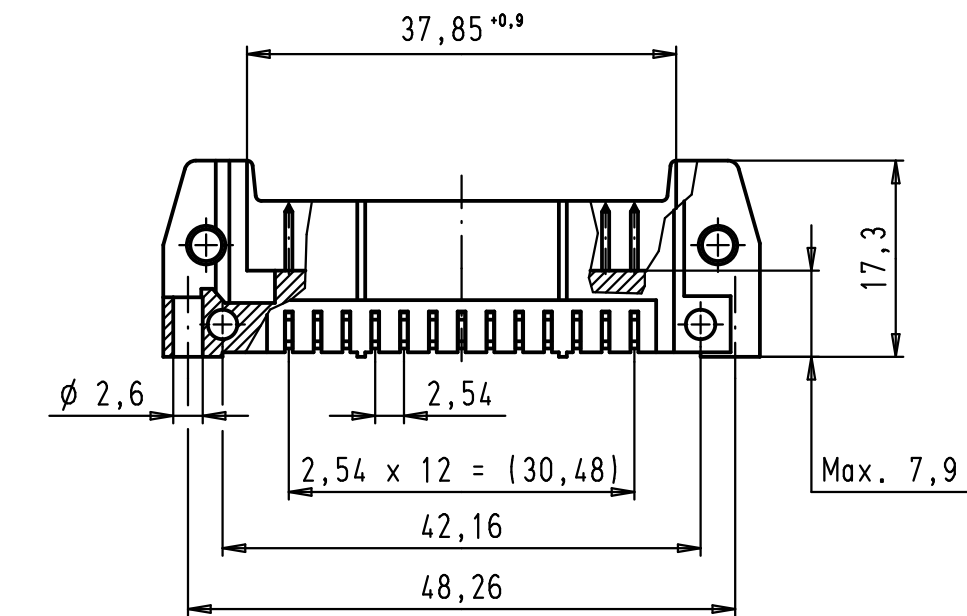

PCB layout, component side

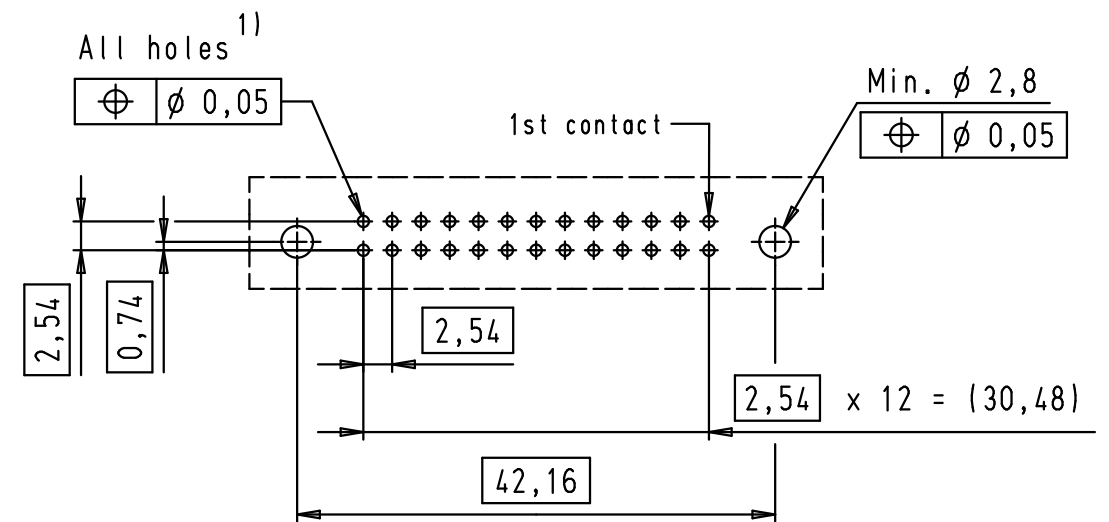

1) Solder pins for PCB connections
 $\phi 1 \pm 0,1$ according to IEC 60 326-3

09 18 526 7921	3	4,5
09 18 526 6921	2	4,5
09 18 526 5921	0,76 $\mu\text{m Au}$	4,5
09 18 526 7923	3	2,9
09 18 526 6923	2	2,9
09 18 526 5923	0,76 $\mu\text{m Au}$	2,9
Part number	Performance level	a

Mod.	Dat.	Name	Det.	Orig. Size	Orig. Size	Orig. Size	Orig. Size	Orig. Size	Orig. Size
34890	01/02/08	PK	Detail.	01/12/99	JB				
29753	11/03/02	JB	Insp.						
29739	03/12/01	JB	Stand.						
27931	15/06/00	JB							
26554	01/12/99	JB							
HARTING EURL	F-95972	Paris							
SEK 18 Male Connector Standard	26 poles	Angled pins	Without locking levers						
TB 09 18 526 X92X									
Maßstab/Scale	1,5:1								
Blatt/Page	2/2								