




TM3S25-C

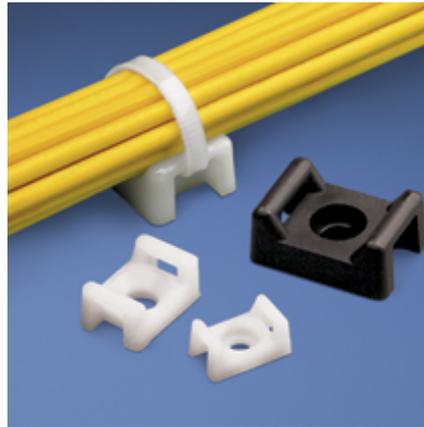

- Unique cradle design provides maximum stability for cable bundle
- Low profile design keeps bundle close to mounting surface where overhead space is limited
- ‡Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, HS = Heavy Standard, LH = Light-Heavy

▪ Part Number	TM3S25-C
▪ RoHS Compliancy Status	Compliant
▪ Part Description	Cable Tie Mount - Screw Applied
▪ Product Type	Cable Tie Mounts - Screw / Rivet Mounted
▪ Material	Nylon 6.6
▪ Color	Natural
▪ UL Recognized	E136577
▪ Height (In.)	.38
▪ Height (mm)	9.6
▪ Length (In.)	.88
▪ Length (mm)	22.3
▪ Width (In.)	.63
▪ Width (mm)	16.0
▪ CE Compliant	CT-ACC2 / 10.96
▪ Environment	Indoors
▪ Flammability Rating	UL94 V-2
▪ Hole Diameter (In.)	.26
▪ Hole Diameter (mm)	6.6
▪ Max. Bundle Diameter (mm)	7.6
▪ Mounting Method	1/4 (M6) screw
▪ Pricing Description	Cable Tie Mount, .62" (15.8mm)W, 1/4 Screw, Nylon
▪ Screw Size	1/4 (M6)
▪ Screw Size Metric	M6
▪ Used With Cable Ties	M, I, S, LH
▪ Min. Order UOM	PC
▪ Min. Order Qty.	100
▪ BOM Qty. (# of Pkgs.)	


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.*	MAT'L SUFFIX	RECOMMENDED FASTENER	'A'	'B'	'C'	'D'	'E'	'F'	'G' 'REF'	'H' 'REF'	'J' 'REF'	USE WITH THESE CABLE TIE CROSS SECTIONS	WEIGHT (g) lbs/100 pcs.
TM3S8	NONE -0 -30 -49	#8 (M4) SCREW	0.863 [21.9]	0.610 [15.5]	0.373 [9.4]	0.320 [8.1] ±.020 [0.5]	0.088 [2.2] ±.020 [0.5]	0.208 [5.3]	0.105 [2.7]	0.325	0.180	MINIATURE INTERMEDIATE STANDARD LT. HEAVY	0.369 [167.5]
TM3S10	NONE -0 -30	#10 (M5) SCREW							0.115 [2.9]				0.385
TM3S25	NONE -0 -30	1/4" (M6) SCREW	0.879 [22.3]	0.629 [16.0]	0.379 [9.6]			0.210 [5.3]	0.155 [3.9]	0.506	0.262		0.296 [134.5]
TM3S2510	-30 -39	#10 (M5) SCREW	0.873 [22.2]	0.620 [15.7]				0.212 [5.4]	0.120 [3.0]	0.480	0.200		0.321 [145.5]



NOTES:

- *1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
- 2. HOLE DIMENSIONS SHOULD ACCOMMODATE SPECIFIED RECOMMENDED FASTENER.

MAT'L SUFFIX	MATERIAL	COLOR
NONE	NYLON 6/6	NATURAL
-0	WEATHER RESISTANT NYLON	BLACK
-30	HEAT STABILIZED NYLON	
-39	HEAT STABILIZED NYLON	NATURAL
-49	IMPACT MODIFIED NYLON	

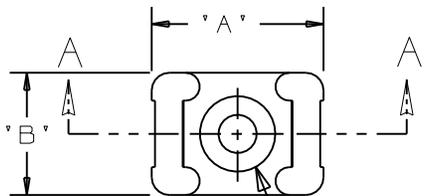

SEE NOTE 2

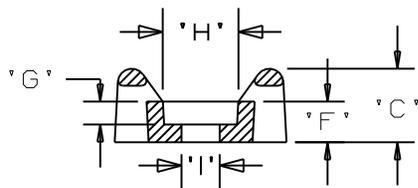

SECTION A - A

DIMENSIONS IN BRACKETS ARE METRIC [mm]	
CAD FILENAME/LAYERS	G00239EN_PB_TM3S_11
 PANDUIT CORP. TINLEY PARK, ILLINOIS	
TM3S - TIE MOUNT	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ±0.05 [1.3] (.XXX) ±0.010 [0.25] (.XX) ±0.02 [0.5] ANGLES ±5°	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.
DRAWN BY AJV	MAT'L: SEE TABLE
DATE 12/17/96	SCALE NONE
CHK'D	DRAWING NO. GB0239EN
	DWG A SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
11	4/16/07	DJSM		ADDED DECIMAL PLACE TO TABLE, REMOVED MATERIALS -69 AND -100	GB0239EN	11		
10	03/19/07	DJSM		ADDED TM3S2510, ADDED MATERIAL -39, CHANGED TOLERANCES	GB0239EN	10		