


HALL

Quality tools for:


HOLECUTTING · THREADING · CHAMFERING · DEBURRING

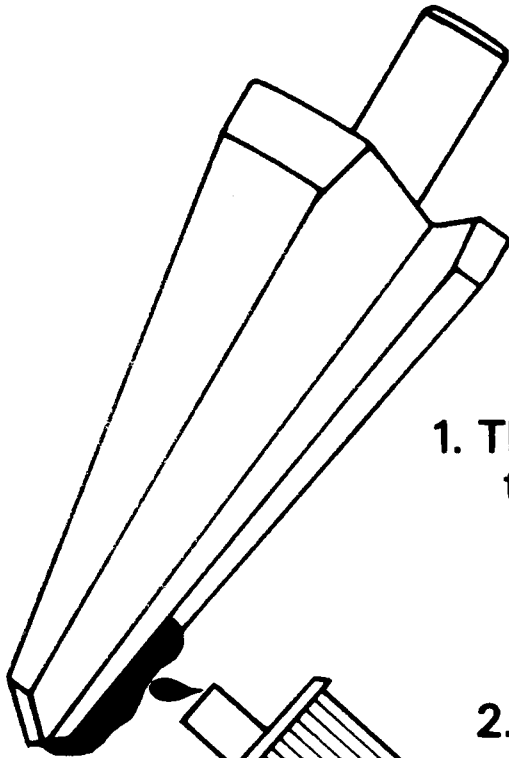

1. The life and efficiency of all cutting tools when used on metals will be improved if an appropriate cutting lubricant is used.

2. HALL Cutting Compound is ideal for use with Conecut Taper Drills and Multicut Step Drills available in 30cc and 60cc dispensers, and ½ kilo pots.


HEALTH & SAFETY
Remember to always
protect your eyes when
using cutting tools

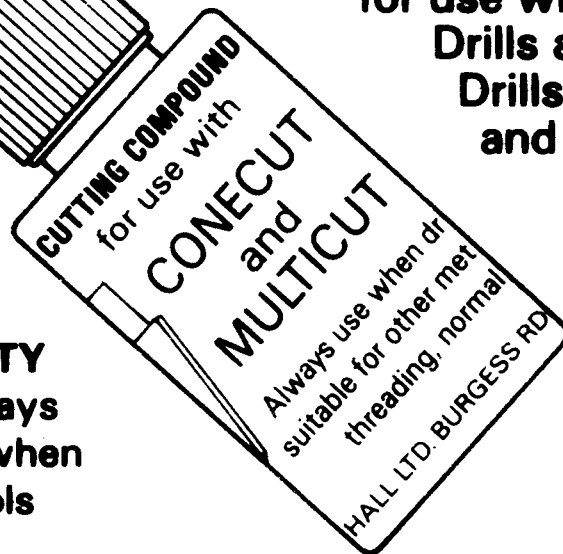


HALL

HIGH SPEED STEEL CUTTING TOOLS


Recommended
Cutting Speeds

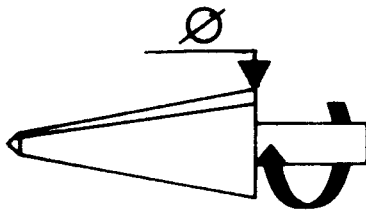


CONECUT TAPER DRILLS

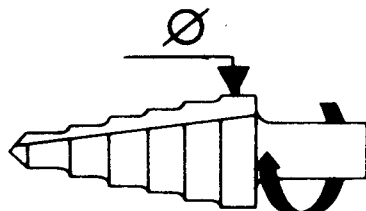


MULTICUT STEP DRILLS

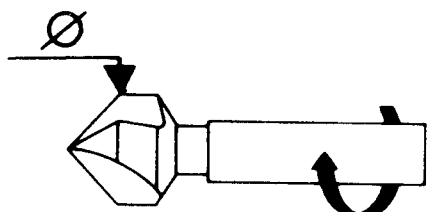

COUNTERSINKS

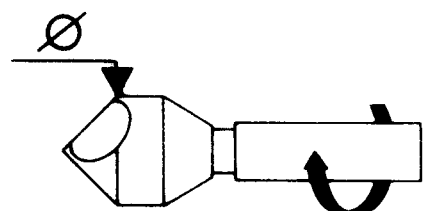

HOLE TYPE
DEBURRING CUTTERS

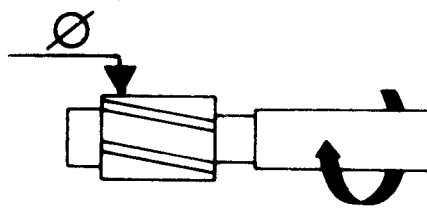

COUNTERBORES

$\varnothing$ METRIC	$\varnothing$ IMPERIAL	 /MIN	
		FERROUS	NON-FERROUS
5	3/16"	900-1900	1900-5200
6	1/4"	700-1600	1600-4400
8	5/16"	500-1200	1200-3200
10	3/8"	400-1000	1000-2600
11	7/16"	400-900	900-2400
12	1/2"	300-800	800-2000
14	9/16"	300-700	700-1800
16	5/8"	300-600	600-1600
18	11/16"	200-500	500-1500
20	13/16"	200-500	500-1500
22	7/8"	200-400	400-1200
24	15/16"	150-400	400-1000
26	1"	150-400	400-1000
28	1.1/8"	150-350	350-1000
30	1.3/16"	150-350	350-1000
32	1.1/4"	150-300	300-800
34	1.3/8"	100-300	300-800
36	1.7/16"	100-300	300-700
40	1.5/8"	100-300	300-500
52	2.1/16"	100-200	200-400