


## FEATURES

- **Annealed Copper Conductor:** Provides superior conductivity and durability
- **Polyvinyl Chloride Jacket:** Offers protection against environmental factors and mechanical stress
- **50/0.25 Core Strands:** Ensures flexibility and ease of installation
- **3 Cores:** Suitable for three-phase power applications
- **Wide Temperature Range:** Operates effectively between -15 °C and 90 °C
- **500 V Voltage Rating:** Suitable for medium voltage applications
- **White Jacket Colour:** Easy identification and aesthetic integration

RS PRO 2.5 mm<sup>2</sup> Flexible Cable, 50 m Length

RS Stock No: 606-116

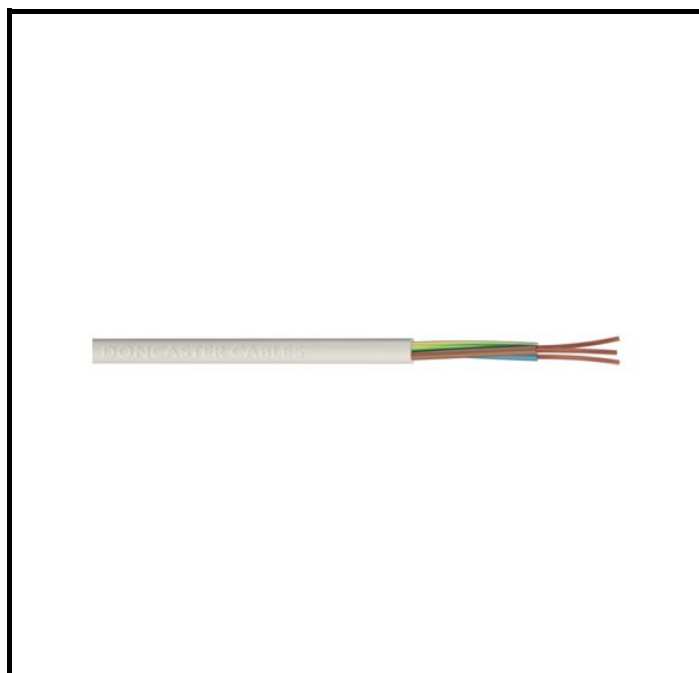

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

This RS PRO flexible cable is designed for reliable electrical connections in various industrial and commercial environments. With a conductor made from annealed copper, it ensures excellent conductivity and durability. The cable is suitable for installations requiring flexibility and is ideal for use in applications where space is limited.

## General Specifications

Conductor Material	Annealed Copper
Conductor Type	Plain
Jacket Colour	White
Product Type	Flexible Cable

## Mechanical Specifications

Cable CSA	2.5 mm <sup>2</sup>
Cable Length	50 m
Core Strands	50/0.25
Jacket Material	Polyvinyl Chloride
Number of Cores	3
Outside Diameter	11.4 mm

## Operation Environment Specifications

Maximum Operating Temperature	90 °C
Minimum Operating Temperature	-15 °C

## Approvals

Standards/Approvals	ACI, BASEC ISO 9001 UKAS CS1-029, BS EN 50363-3, BS EN 50363-4-1, BS EN 50525-2-11, BS EN 60228
---------------------	---

## Electrical Specifications

Voltage	500 V
---------	-------