

MAXIM

+5V, +10V Precision Voltage References

REF01/REF02

General Description


The REF01 and REF02 are precision voltages references that are pretrimmed to within $\pm 0.3\%$ of 10V and 5V respectively. Both references feature excellent temperature stability (as low as 8.5 ppm/ $^{\circ}\text{C}$ worst case), low current drain and low noise. The REF02 also provides a TEMP pin whose output voltage varies linearly with temperature, making this device suitable for a wide variety of temperature sensing and control applications. Both devices are available from Maxim in the space-saving Small Outline package, as well as the standard 8 pin TO-99 and MINI-DIP packages.

Applications


A to D Converters
D to A Converters
Digital Voltmeters
Voltage Regulators
Threshold Detectors

Pin Configuration


Top View



8 Lead TO-99 Metal Can



8 Lead DIP



8 Lead Small Outline

*NOTE: Pin 3 is N.C. (No Connection) on REF01, TEMP Output on REF02

Features


- ◆ Pretrimmed to +5V, +10V $\pm 0.3\%$
- ◆ Excellent Temperature Stability: 3ppm/ $^{\circ}\text{C}$
- ◆ Low Noise: 10 $\mu\text{V}_{\text{p-p}}$ (REF02)
- ◆ Low Supply Current: 1.4mA Max
- ◆ Short Circuit Proof
- ◆ Linear Temperature Transducer O/P (REF02)

Ordering Information

PART	V _{OUT} @ 25 $^{\circ}\text{C}$	PACKAGE
TEMP RANGE: 0$^{\circ}\text{C}$ TO +70$^{\circ}\text{C}$		
REF01EJ	10V $\pm$ 30mV	TO-99
REF01HJ	10V $\pm$ 50mV	TO-99
REF01CJ	10V $\pm$ 100mV	TO-99
REF01EZ	10V $\pm$ 30mV	Hermetic DIP
REF01HZ	10V $\pm$ 50mV	Hermetic DIP
REF01CZ	10V $\pm$ 100mV	Hermetic DIP
REF01HP	10V $\pm$ 50mV	Plastic DIP
REF01CP	10V $\pm$ 100mV	Plastic DIP
REF01HCSA	10V $\pm$ 50mV	Small Outline
REF01CCSA	10V $\pm$ 100mV	Small Outline
TEMP RANGE: -55$^{\circ}\text{C}$ TO +125$^{\circ}\text{C}$		
REF01AJ	10V $\pm$ 30mV	TO-99
REF01J	10V $\pm$ 50mV	TO-99
REF01AZ	10V $\pm$ 30mV	Hermetic DIP
REF01Z	10V $\pm$ 50mV	Hermetic DIP

(Ordering information continued on last page.)

Typical Operating Circuit

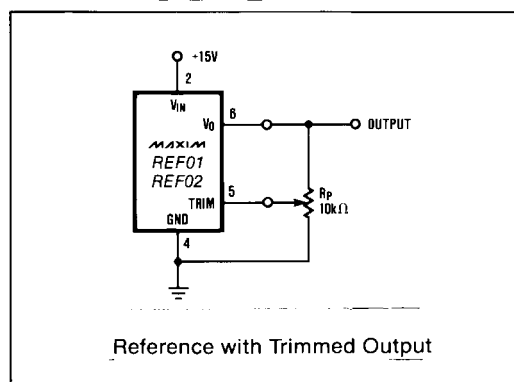

+5V, +10V Precision Voltage References

ABSOLUTE MAXIMUM RATINGS—REF01

Input Voltage	
REF01, A, E, H, All DICE	40V
REF01C	30V
Power Dissipation	
T099 (J)	500mW
(Derate at 7.1mW/°C above 80°C)	
CERDIP (Z)	500mW
(Derate at 6.7mW/°C above 75°C)	
Plastic DIP (P)	500mW
(Derate at 5.6mW/°C above 36°C)	
Small Outline (S)	300mW
(Derate at 5.0mW/°C above 55°C)	

Output Short-Circuit Duration (to Ground or V_{IN})	Indefinite
Storage Temperature Range	-65°C to +150°C
Operating Temperature Range	
REF01A, REF01	-55°C to +125°C
REF01E, REF01H, REF01C	0°C to +70°C
DICE Junction Temperature (T_J)	-65°C to +150°C
Lead Temperature (Soldering, 60 sec.)	+300°C

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—REF01

($V_{IN} = +15V$, $T_A = 25^\circ C$, unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	REF01A/E			REF01/H			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Output Voltage	V_O	$I_L = 0$	9.97	10.00	10.03	9.95	10.00	10.05	V
Output Adjustment Range	ΔV_{trim}	$R_p = 10k\Omega$	± 3.0	± 3.3	—	± 3.0	± 3.3	—	%
Output Voltage Noise	e_{np-p}	0.1Hz to 10Hz (Note 5)	—	20	30	—	20	30	μV_{p-p}
Line Regulation (Note 4)		$V_{IN} = 13V$ to 33V	—	0.006	0.010	—	0.006	0.010	%/V
Load Regulation (Note 4)		$I_L = 0$ to 10mA	—	0.005	0.008	—	0.006	0.010	%/mA
Turn-on Settling Time	t_{ON}	To $\pm 0.1\%$ of final value	—	5	—	—	5	—	μs
Quiescent Supply Current	I_{SY}	No Load	—	1.0	1.4	—	1.0	1.4	mA
Load Current	I_L		10	21	—	10	21	—	mA
Sink Current	I_S		-0.3	-0.5	—	-0.3	-0.5	—	mA
Short-Circuit Current	I_{SC}	$V_O = 0$	—	30	—	—	30	—	mA

ELECTRICAL CHARACTERISTICS—REF01

($V_{IN} = +15V$, $-55^\circ C \leq T_A \leq +125^\circ C$ for REF01A and REF01, $0^\circ C \leq T_A \leq +70^\circ C$ for REF01E and REF01H, $I_L = 0mA$, unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	REF01A/E			REF01/H			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Output Voltage Change with Temperature (Notes 1, 2)	ΔV_{OT}	$0^\circ C \leq T_A \leq +70^\circ C$ $-55^\circ C \leq T_A \leq +125^\circ C$	—	0.02 0.06	0.06 0.15	—	0.07 0.18	0.17 0.45	%
Output Voltage Temperature Coefficient	TCV_O	(Note 3)	—	3.0	8.5	—	10.0	25.0	ppm/°C
Change in V_O Temperature Coefficient with Output Adjustment		$R_p = 10k\Omega$	—	0.7	—	—	0.7	—	ppm/%
Line Regulation ($V_{IN} = 13V$ to 33V)(Note 4)		$0^\circ C \leq T_A \leq +70^\circ C$ $-55^\circ C \leq T_A \leq +125^\circ C$	—	0.007 0.009	0.012 0.015	—	0.007 0.009	0.012 0.015	%/V
Load Regulation ($I_L = 0$ to 8mA)(Note 4)		$0^\circ C \leq T_A \leq +70^\circ C$ $-55^\circ C \leq T_A \leq +125^\circ C$	—	0.006 0.007	0.010 0.012	—	0.007 0.009	0.012 0.015	%/mA

Note 1: ΔV_{OT} is defined as the absolute difference between the maximum output voltage and the minimum output voltage over the specified temperature range expressed as a percentage of 10V:

$$\Delta V_{OT} = \left| \frac{V_{MAX} - V_{MIN}}{10V} \right| \times 100$$

Note 2: ΔV_{OT} specification applies trimmed to +10.000V or untrimmed.

Note 3: TCV_O is defined as ΔV_{OT} divided by the temperature range.

Note 4: Line and Load Regulation specifications include the effect of self heating.

Note 5: Sample tested.

+5V, +10V Precision Voltage References

REF01/REF02

ELECTRICAL CHARACTERISTICS—REF01

($V_{IN} = +15V$, $T_A = 25^\circ C$, unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	REF01C			UNITS
			MIN	TYP	MAX	
Output Voltage	V_O	$I_L = 0mA$	9.90	10.00	10.10	V
Output Adjustment Range	ΔV_{trim}	$R_p = 10k\Omega$	± 2.7	± 3.3	—	%
Output Voltage Noise	e_{np-p}	0.1Hz to 10Hz (Note 5)	—	25	35	μV_{p-p}
Line Regulation (Note 4)		$V_{IN} = 13V$ to 30V	—	0.009	0.015	%/V
Load Regulation (Note 4)		$I_L = 0$ to 8mA $I_L = 0$ to 4mA	— —	0.006 0.006	0.015 0.015	%/mA
Turn-on Settling Time	t_{ON}	To $\pm 0.1\%$ of final value	—	5	—	μs
Quiescent Supply Current	I_{SY}	No Load	—	1.0	1.6	mA
Load Current	I_L		8	21	—	mA
Sink Current	I_S		-0.2	-0.5	—	mA
Short-Circuit Current	I_{SC}	$V_O = 0$	—	30	—	mA

ELECTRICAL CHARACTERISTICS—REF01

($V_{IN} = +15V$, $0^\circ C \leq T_A \leq +70^\circ C$, unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	REF01C			UNITS
			MIN	TYP	MAX	
Output Voltage Change with Temperature	ΔV_{OT}	(Notes 1 and 2)	—	0.14	0.45	%
Output Voltage Temperature Coefficient	TCV_O	(Note 3)	—	20	65	ppm/ $^\circ C$
Change in V_O Temperature Coefficient with Output Adjustment		$R_p = 10k\Omega$	—	0.7	—	ppm/%
Line Regulation (Note 4)		$V_{IN} = 13V$ to 30V	—	0.011	0.018	%/V
Load Regulation (Note 4)		$I_L = 0$ to 5mA	—	0.008	0.018	%/mA

Notes: See previous page.

Output Adjustment

The REF01 trim terminal can be used to adjust the voltage over a $10V \pm 300mV$ range. This feature allows the system designer to trim system errors by setting the reference to a voltage other than 10V, including 10.240V for binary applications (see "Typical Operating Circuit" on first page).

Adjustment of the output does not significantly affect the temperature performance of the device. The temperature coefficient change is approximately 0.7 ppm/ $^\circ C$ for 100mV of output adjustment.

Burn-in Circuit

The burn-in circuit of Figure 1 is used for both the REF01 and the REF02. All Maxim REF01s and REF02s are 100% burned-in for a minimum of 24hrs at $150^\circ C$ (except for Small Outline package), which is equivalent to 25 years of operation at $25^\circ C$. This substantially improves the long term stability of the part, and allows Maxim to offer a product with a F.I.T. rate of better than 10 (See Product Reliability Report RR-1A).

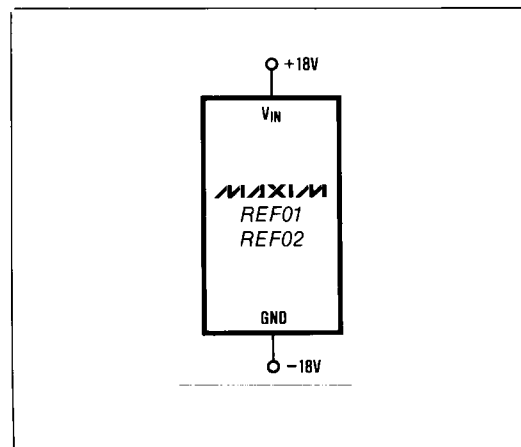


Figure 1. Burn-in circuit

+5V, +10V Precision Voltage References

ABSOLUTE MAXIMUM RATINGS—REF02

Input Voltage	
REF02, A, E, H, All DICE	40V
REF02C, D	30V
Power Dissipation	
T099 (J)	500mW
(Derate at 7.1mW/°C above 80°C)	
CERDIP (Z)	500mW
(Derate at 6.7mW/°C above 75°C)	
Plastic DIP (P)	500mW
(Derate at 5.6mW/°C above 36°C)	
Small Outline (S)	300mW
(Derate at 5.0mW/°C above 55°C)	

Storage Temperature Range	-65°C to +150°C
Operating Temperature Range	
REF02A, REF02	-55°C to +125°C
REF02E, REF02H	0°C to +70°C
REF02C, REF02D	0°C to +70°C
Lead Temperature (Soldering, 60 sec.)	+300°C
DICE Junction Temperature (T _J)	-65°C to +150°C
Output Short-Circuit Duration (to Ground or V _{IN})	Indefinite

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—REF02

(V_{IN} = +15V, T_A = +25°C, unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	REF02A/E			REF02/H			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Output Voltage	V _O	I _L = 0	4.985	5.000	5.015	4.975	5.000	5.025	V
Output Adjustment Range	ΔV _{trim}	R _p = 10kΩ	±3	±6	—	±3	±6	—	%
Output Voltage Noise	e _{np-p}	0.1Hz to 10Hz (Note 6)	—	10	15	—	10	15	μV _{p-p}
Line Regulation (Note 1)		V _{IN} = 8V to 33V	—	0.006	0.010	—	0.006	0.010	%/V
Load Regulation (Note 1)		I _L = 0 to 10mA	—	0.005	0.010	—	0.006	0.010	%/mA
Turn-on Settling Time	t _{ON}	To ±0.1% of final value	—	5	—	—	5	—	μs
Quiescent Supply Current	I _{SY}	No Load	—	1.0	1.4	—	1.0	1.4	mA
Load Current	I _L		10	21	—	10	21	—	mA
Sink Current	I _S		-0.3	-0.5	—	-0.3	-0.5	—	mA
Short-Circuit Current	I _{SC}	V _O = 0	—	30	—	—	30	—	mA
Temperature Voltage Output	V _T	(Note 2)	—	630	—	—	630	—	mV

ELECTRICAL CHARACTERISTICS—REF02

(V_{IN} = +15V, -55°C ≤ T_A ≤ +125°C for REF02A and REF02, 0°C ≤ T_A ≤ +70°C for REF02E and REF02H, I_L = 0mA, unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	REF02A/E			REF02/H			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Output Voltage Change with Temperature (Notes 3, 4)	ΔV _{OT}	0°C ≤ T _A ≤ +70°C -55°C ≤ T _A ≤ +125°C	—	0.02 0.06	0.06 0.15	—	0.07 0.18	0.17 0.45	%
Output Voltage Temperature Coefficient	TCV _O	(Note 5)	—	3	8.5	—	10	25	ppm/°C
Change in V _O Temperature Coefficient with Output Adjustment		R _p = 10kΩ	—	0.7	—	—	0.7	—	ppm/%
Line Regulation (V _{IN} = 8V to 33V)(Note 1)		0°C ≤ T _A ≤ +70°C -55°C ≤ T _A ≤ +125°C	—	0.007 0.009	0.012 0.015	—	0.007 0.009	0.012 0.015	%/V
Load Regulation (I _L = 0 to 8mA)(Note 1)		0°C ≤ T _A ≤ +70°C -55°C ≤ T _A ≤ +125°C	—	0.006 0.007	0.010 0.012	—	0.007 0.009	0.012 0.015	%/mA
Temperature Voltage Output Temperature Coefficient	TCV _T	(Note 2)	—	2.1	—	—	2.1	—	mV/°C

Note 1: Line and Load Regulation specifications include the effect of self heating.

Note 2: Limit current in or out of pin 3 to 50nA and capacitance on pin 3 to 30pF.

Note 3: ΔV_{OT} is defined as the absolute difference between the maximum output voltage and the minimum output voltage over the specified temperature range expressed as a percentage of 5V:

$$\Delta V_{OT} = \frac{V_{MAX} - V_{MIN}}{5V} \times 100$$

Note 4: ΔV_{OT} specification applies trimmed to +5.000V or untrimmed.

Note 5: TCV_O is defined as ΔV_{OT} divided by the temperature range.

Note 6: Sample tested.

+5V, +10V Precision Voltage References

REF01/REF02

ELECTRICAL CHARACTERISTICS—REF02

($V_{IN} = +15V$, $T_A = 25^\circ C$, unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	REF02C			REF02D			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Output Voltage	V_O	$I_L = 0mA$	4.950	5.000	5.050	4.900	5.000	5.100	V
Output Adjustment Range	ΔV_{trim}	$R_p = 10k\Omega$	± 2.7	± 6.0	—	± 2.0	± 6.0	—	%
Output Voltage Noise	e_{np-p}	0.1Hz to 10Hz (Note 6)	—	12	18	—	12	—	μV_{p-p}
Line Regulation (Note 1)		$V_{IN} = 8V$ to $30V$	—	0.009	0.015	—	0.010	0.04	%/V
Load Regulation (Note 1)		$I_L = 0$ to $8mA$ $I_L = 0$ to $4mA$	— —	0.006 —	0.015 —	— —	0.015 0.04	0.04	%/mA
Turn-on Settling Time	t_{ON}	To $\pm 0.1\%$ of final value	—	5	—	—	5	—	μs
Quiescent Supply Current	I_{SY}	No Load	—	1.0	1.6	—	1.0	2.0	mA
Load Current	I_L		8	21	—	8	21	—	mA
Sink Current	I_S		-0.2	-0.5	—	-0.2	-0.5	—	mA
Short-Circuit Current	I_{SC}	$V_O = 0$	—	30	—	—	30	—	mA
Temperature Voltage Output	V_T	(Note 2)	—	630	—	—	630	—	mV

ELECTRICAL CHARACTERISTICS—REF02

($V_{IN} = +15V$, $0^\circ C \leq T_A \leq +70^\circ C$ and $I_L = 0mA$, unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	REF02C			REF02D			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Output Voltage Change with Temperature	ΔV_{OT}	(Notes 3 and 4)	—	0.14	0.45	—	0.49	1.7	%
Output Voltage Temperature Coefficient	TCV_O	(Note 5)	—	20	65	—	70	250	ppm/ $^\circ C$
Change in V_O Temperature Coefficient with Output Adjustment		$R_p = 10k\Omega$	—	0.7	—	—	0.7	—	ppm/%
Line Regulation (Note 1)		$V_{IN} = 8V$ to $30V$	—	0.011	0.018	—	0.012	0.05	%/V
Load Regulation (Note 1)		$I_L = 0$ to $5mA$	—	0.008	0.018	—	0.016	0.05	%/mA
Temperature Voltage Output Temperature Coefficient	TCV_T	(Note 2)	—	2.1	—	—	2.1	—	mV/ $^\circ C$

Notes: See previous page.

Output Adjustment

The REF02 trim terminal can be used to adjust the output voltage over a $5V \pm 300mV$ range. This feature allows the system designer to trim system errors by setting the reference to a voltage other than 5V (see "Typical Operating Circuit" on first page).

Adjustment of the output does not significantly affect the temperature performance of the device. Typically, the temperature coefficient change is $0.7ppm/^\circ C$ for $100mV$ of output adjustment.

Temperature Voltage Output

The REF02 provides a temperature dependent output voltage on the TEMP pin. This voltage is proportional to the absolute temperature, and has a scale factor of approximately $2.1mV/^\circ C$ (Figure 2).

Output Voltage = $2.1(T + 273)mV$
where T = Temperature in $^\circ C$


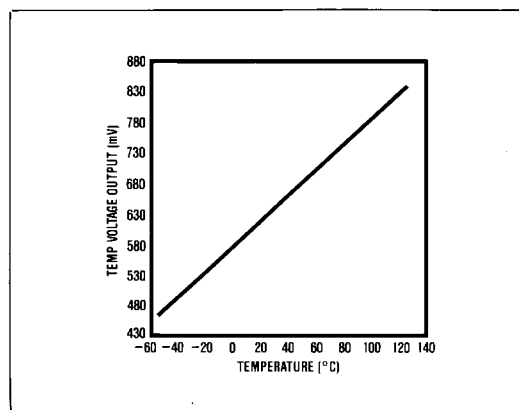


Figure 2. REF02 Temperature Voltage Output vs. Temperature.

+5V, +10V Precision Voltage References

REF01/REF02

Typical Operating Characteristics

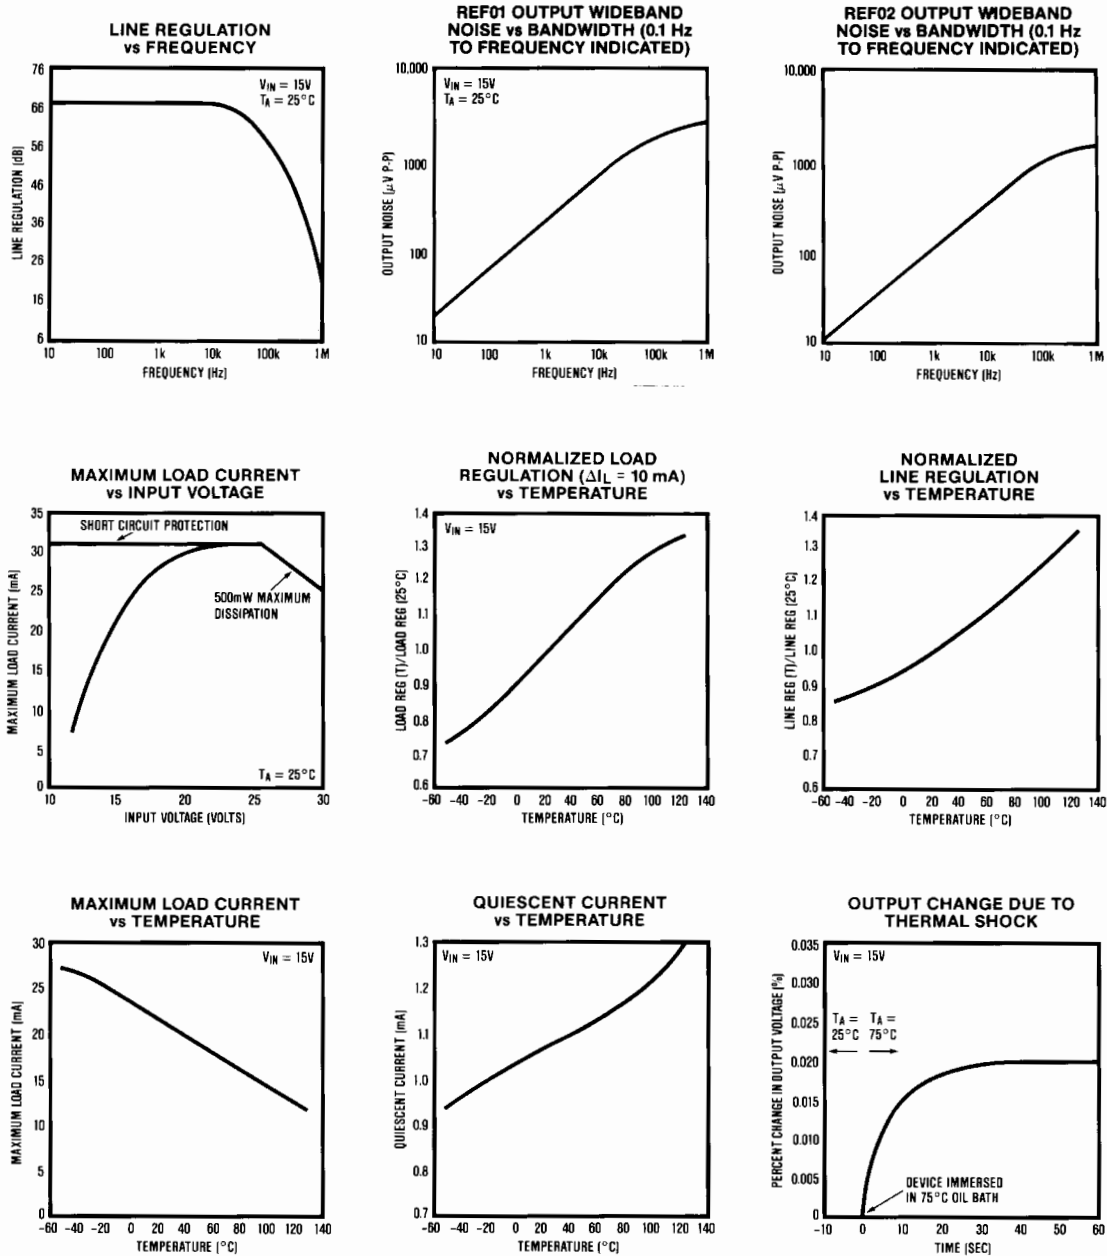

+5V, +10V Precision Voltage References

Typical Applications

REF01/REF02

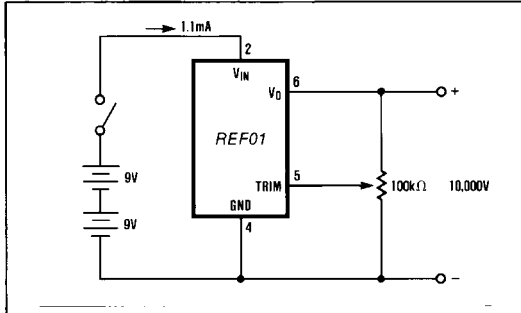


Figure 3. Precision Calibration Standard

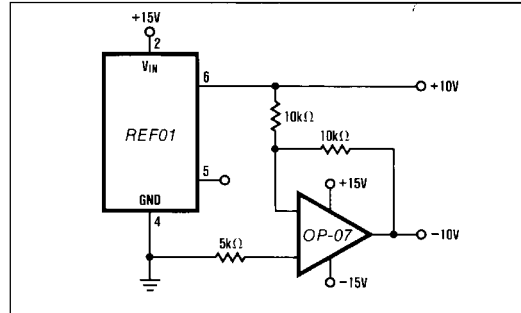


Figure 4. ±10V Reference

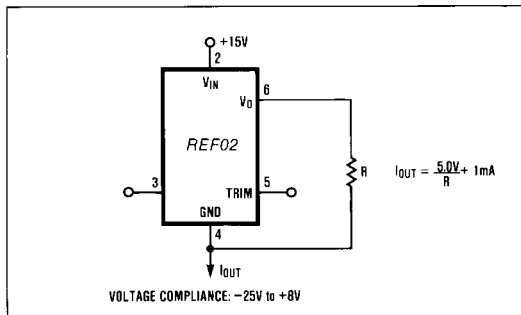


Figure 5. Current Source


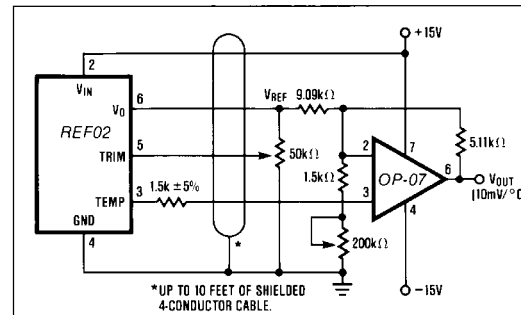


Figure 6. Precision Temperature Transducer with Remote Sensor

Chip Topography

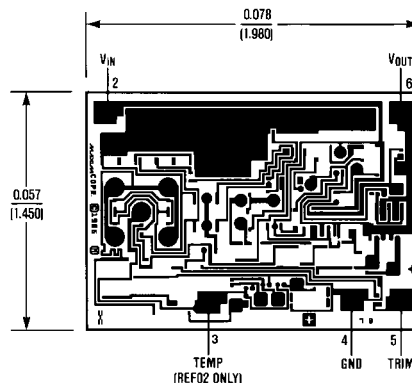

+5V, +10V Precision Voltage References

Ordering Information

(Continued from first page)

PART	V _{OUT} @ 25°C	PACKAGE	PART	V _{OUT} @ 25°C	PACKAGE
TEMP RANGE: 0°C TO +70°C			TEMP RANGE: 0°C TO +70°C		
REF02EJ	5V ± 15mV	TO-99	REF02DP	5V ± 100mV	Plastic DIP
REF02HJ	5V ± 25mV	TO-99	REF02HCSA	5V ± 25mV	Small Outline
REF02CJ	5V ± 50mV	TO-99	REF02CCSA	5V ± 50mV	Small Outline
REF02DJ	5V ± 100mV	TO-99	REF02DCSA	5V ± 100mV	Small Outline
REF02EZ	5V ± 15mV	Hermetic DIP	TEMP RANGE: -55°C TO +125°C		
REF02HZ	5V ± 25mV	Hermetic DIP	REF02AJ	5V ± 15mV	TO-99
REF02CZ	5V ± 50mV	Hermetic DIP	REF02J	5V ± 25mV	TO-99
REF02DZ	5V ± 100mV	Hermetic DIP	REF02AZ	5V ± 15mV	Hermetic DIP
REF02HP	5V ± 25mV	Plastic DIP	REF02Z	5V ± 25mV	Hermetic DIP
REF02CP	5V ± 50mV	Plastic DIP			

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.