

# Customer Information Sheet

DRAWING No.: S7071-46R

SHEET 2 OF 2






IF IN DOUBT - ASK

©



NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

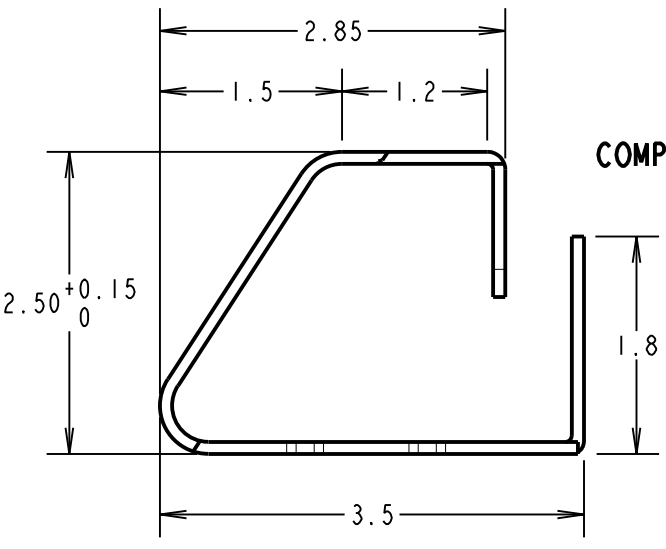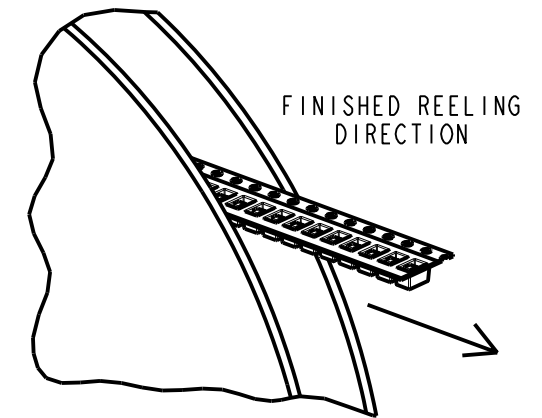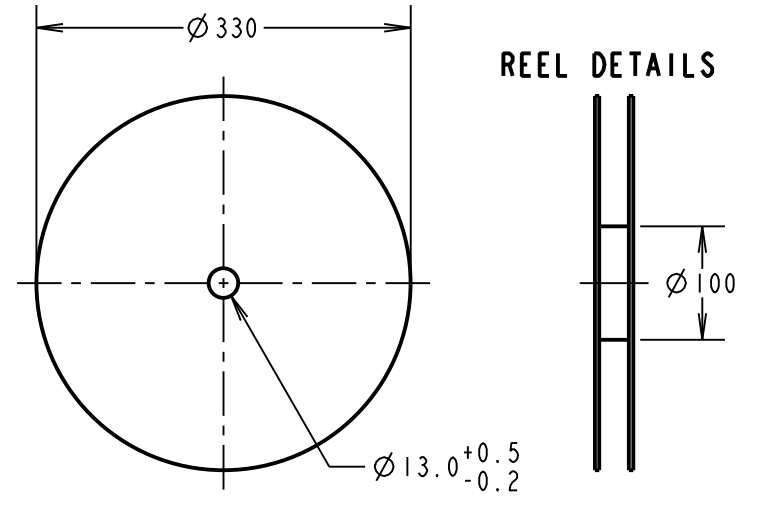
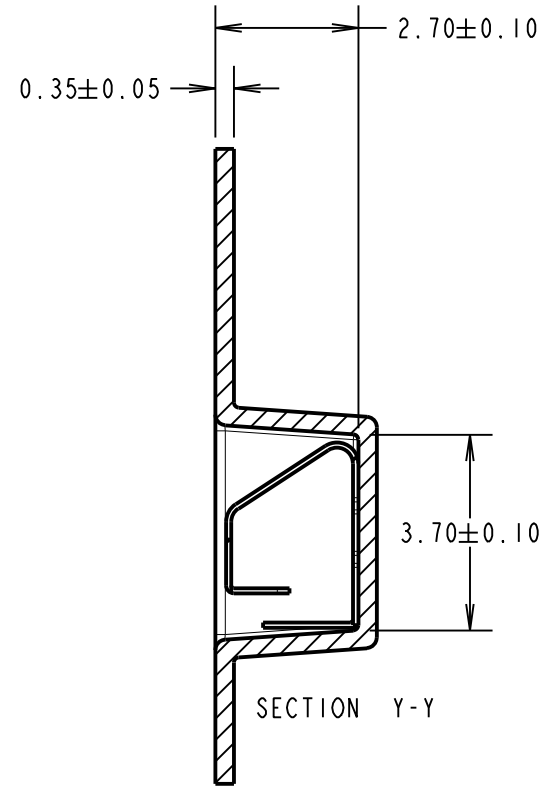
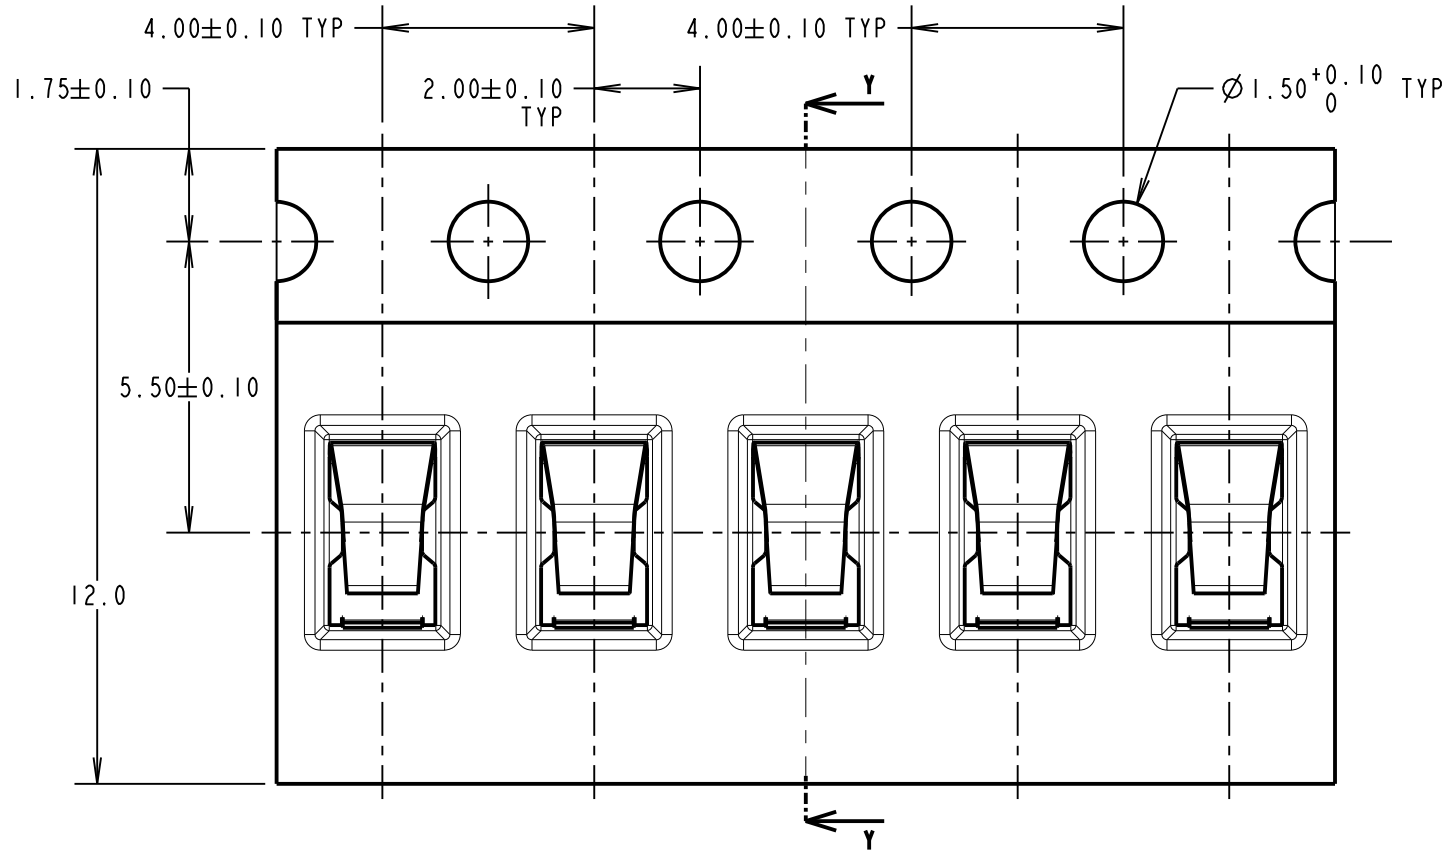


COMPONENT DETAILS

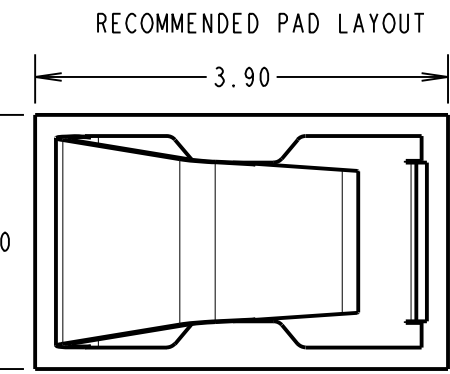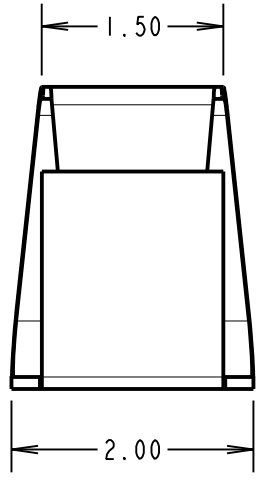

COMPONENT AT MINIMUM RECOMMENDED HEIGHT

COMPONENT SPECIFICATION:  
 MATERIAL = TITANIUM COPPER ALLOY,  
 0.10mm THICK  
 FINISH = 0.7 $\mu$ -1.3 $\mu$  NICKEL ALL OVER,  
 2.54 $\mu$  MIN 100% MATTE TIN ON  
 FOOT AREA.  
 RECOMMENDED WORKING HEIGHT = 2.10mm / MIN FORCE = 1.2N  
 RECOMMENDED MINIMUM WORKING HEIGHT = 1.80mm  
 ELECTRICAL:  
 CURRENT RATING = 5A

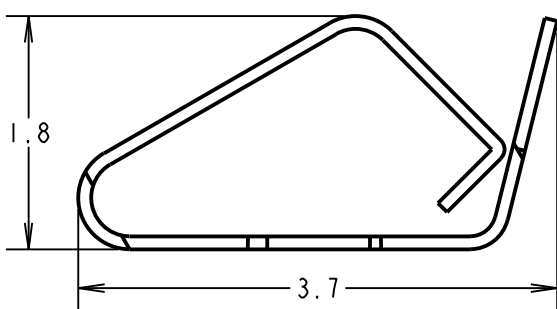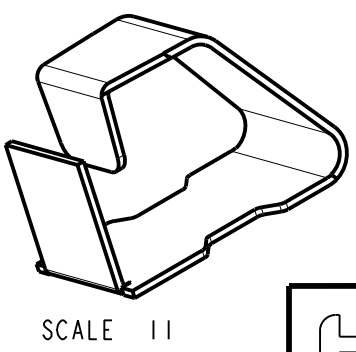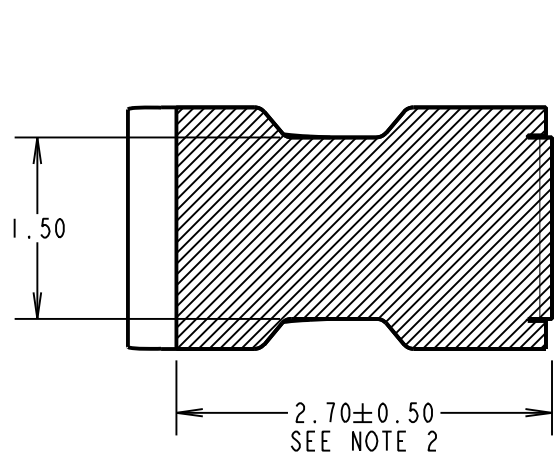

NOTES:  
 1. QUANTITY PER REEL = 6000.  
 2. AREA FOR MATTE TIN PLATE.  
 3. ALL TOLERANCES ARE: X.X = ±0.30mm  
 X.XX = ±0.15mm  
 UNLESS OTHERWISE STATED.

SB	5	10.06.13	12074
NAME	ISS.	DATE	C/NOTE
APPROVED:		S.BENNETT	
CHECKED:		M.PLESTED	
DRAWN:		R.ADDE	
CUSTOMER REF.:			
ASSEMBLY DRG:			

<p>www.harwin.com technical@harwin.com</p>	<p>THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.</p>	<p>TOLERANCES                  X = ±1mm                  X.X = ±0.25mm                  X.XX = ±0.10mm                  X.XXX = ±0.01mm                  ANGLES = ±5°                  UNLESS STATED</p>	MATERIAL: SEE ABOVE	TITLE: SMT SHIELD FINGER (2.5mm) IN TAPE AND REEL
			FINISH: SEE ABOVE	