



## MRT6H-L6





- Provide tight bundling of armored cables, pipes, conduit and other rigid materials in harsh conditions for a reliable, easy to install fastening solution
- Self-locking cable tie design locks into place at any length along the tie body, unlike fixed diameter band clamps
- Smooth surfaces and rounded edges assures cable protection and worker safety
- Available in AISI 304 stainless steel for general-purpose applications
- Available in AISI 316 stainless steel for the most corrosive environments

▪ Part Number	MRT6H-L6
▪ RoHS Compliancy Status	Compliant
▪ Part Description	Retained tension, stainless steel cable tie, light-heavy, 6" (152mm) max. bundle diameter.
▪ Product Type	Cable Ties
▪ Material	Stainless Steel Type 316
▪ Length (In.)	23.8
▪ Length (mm)	604
▪ Width (In.)	.31
▪ Width (mm)	7.9
▪ Cross Section	Heavy
▪ Max. Bundle Diameter (In.)	6.0
▪ Max. Bundle Diameter (mm)	152
▪ Min. Bundle Diameter (In.)	1.00
▪ Min. Bundle Diameter (mm)	25.4
▪ Min. Loop Tensile Strength (Lbs.)	400
▪ Min. Loop Tensile Strength (N)	1780
▪ Pricing Description	Retained Tension Tie, 316 SS, Heavy, 23.8" (604mm), .010" (.25mm) thk
▪ Thickness (In.)	.010
▪ Thickness (mm)	.25
▪ Tool	MTRTH
▪ Min. Order UOM	PC
▪ Min. Order Qty.	50
▪ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY.	MAX. BUNDLE DIAMETER	LENGTH "L" ±.3" [ 7 ]
MRT1.5H-L6	50	1.5" [ 38 ]	9.7" [ 246 ]
MRT2H-L6	50	2" [ 51 ]	11.3" [ 287 ]
MRT4H-L6	50	4" [ 102 ]	17.6" [ 447 ]
MRT6H-L6	50	6" [ 152 ]	23.8" [ 604 ]

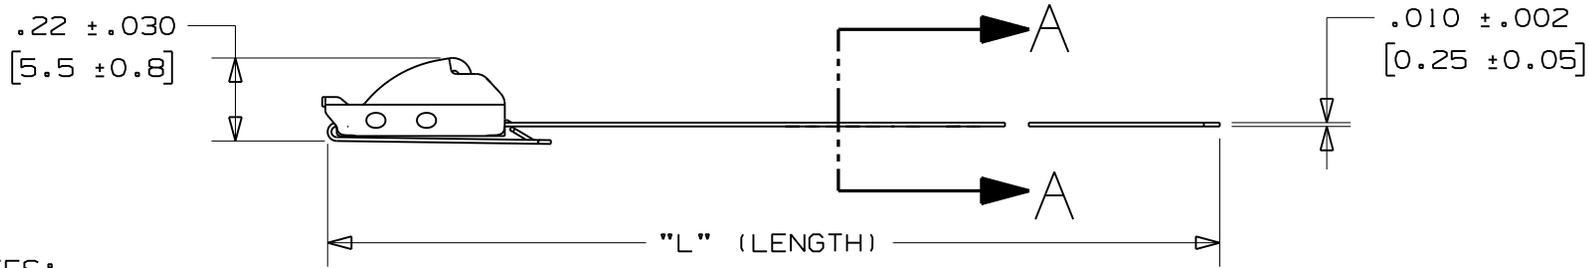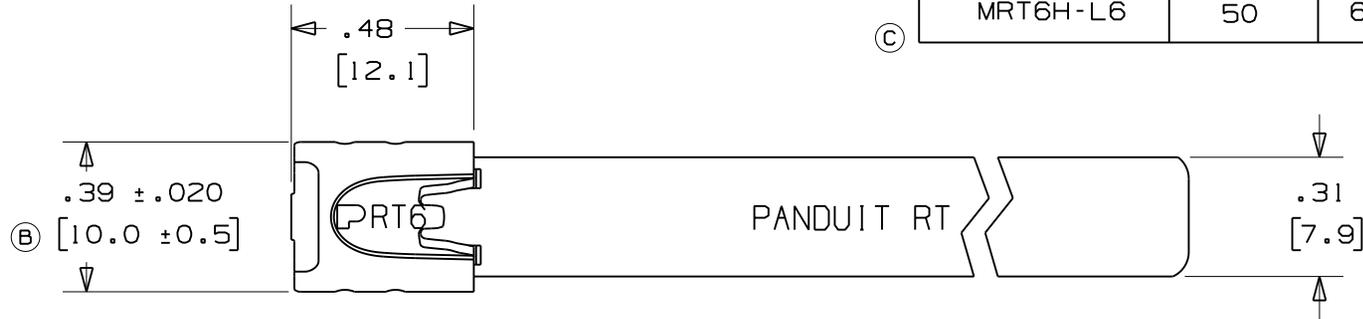

NOTES:

- APPLICATION TOOLS - MTRTH
- MINIMUM LOOP TENSILE STRENGTH - 400 LBS. (1780 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
- BRACKETS [ ] DENOTES DIMENSION IN MILLIMETERS
- TOLERANCES:
  - .XXX = ±.010 [ .25 ]
  - .XX = ±.02 [ .5 ]
  - .X = ±.03 [ .8 ]
  - ANGLES = ±2°
- MATERIAL: 316 STAINLESS STEEL

FULLY ROUNDED EDGES  
ALONG STRAP BODY

SECTION A - A  
SCALE 6:1

N41236BS\_DC/03A

03A	6/07	JAMB	EJD	APPLICATION TOOLS WERE MRT1 & PRT1	-----	 TINLEY PARK, ILLINOIS
02	1/07	JAMB	EJD	REMOVED PART NO'S. MRT8H-L6 & MRT10H-L6 FROM TABLE	SS00317	
01	11/06	JAMB	EJD	ADDED .500" TO THE LENGTH "L" TO ALL PART NO'S. IN TABLE. DIM .39" WAS .392"	SS00277	
00	10/06	JAMB	EJD	DRAWING RELEASED	SS00229	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	DRAWN BY JAMB CHK'D EJD SCALE 2:1 DRAWING NO. N41236BS