




Connectors > PCB Connectors > PCB Headers & Receptacles

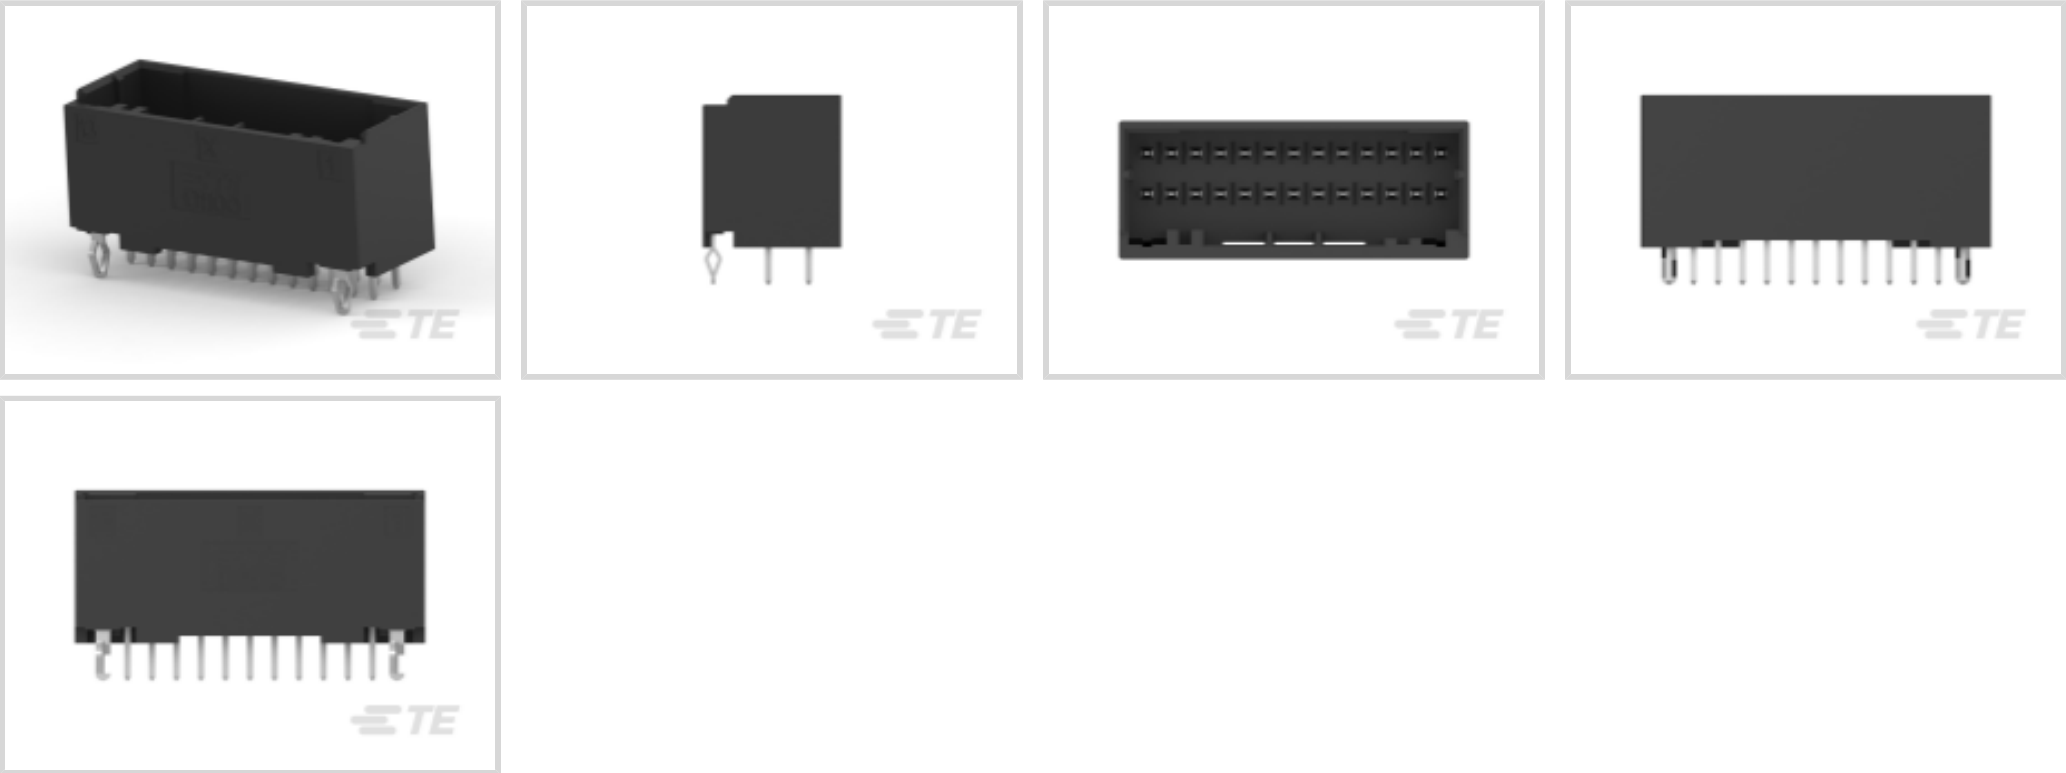

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Number of Positions: **26**

Number of Rows: **2**

Features

Product Type Features

Connector Shape	Rectangular
PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Columns	13
Number of Loaded Positions	26
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Vertical
Number of Positions	26
Number of Rows	2

Electrical Characteristics



Operating Voltage	125 VDC
-------------------	---------

Body Features

Connector & Keying Code	X
PCB Retention Feature Material	Copper Alloy
PCB Retention Feature Plating Material	Pre-Tin
Primary Product Color	Black

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	1 µm[39.37 µin]
Mating Tab Width	.7 mm[.028 in]
PCB Contact Termination Area Plating Material Thickness	1 µm[39.37 µin]
Contact Shape & Form	Rectangular
Contact Layout	Matrix
Contact Mating Area Length	3.6 mm[.142 in]
Contact Base Material	Copper Alloy
Mating Tab Thickness	.5 mm[.02 in]
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Tin (Sn)
Contact Type	Tab
Contact Current Rating (Max)	2 A

Termination Features

Rectangular Termination Post & Tail Width	.5 mm[.02 in]
Rectangular Termination Post & Tail Thickness	.46 mm[.018 in]
Termination Post & Tail Length	3.05 mm[.12 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Panel Mount Feature	Without
Mating Retention Type	Locking Lance
Mating Retention	With
Mating Alignment Type	Keyed
PCB Mount Retention Type	Retention Leg



PCB Mount Retention	With
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Mating Entry Location	Top
Housing Material	Glass-Filled Thermoplastic Polyester
Centerline (Pitch)	2 mm[.079 in]

Dimensions

Row-to-Row Spacing	3.3 mm[.13 in]
Connector Width	11.3 mm[.445 in]
PCB Thickness (Recommended)	1 – 1.6 mm[.039 – .063 in]
Connector Height	12.45 mm[.49 in]
Connector Length	28.6 mm[1.126 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Operation/Application

Shielded	No
Circuit Application	Power & Signal

Industry Standards

Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	15
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 1-1827863-3
DYNAMIC 1100D REC HSG X 26P
BLACK

Also in the Series | Dynamic D-1100D Series

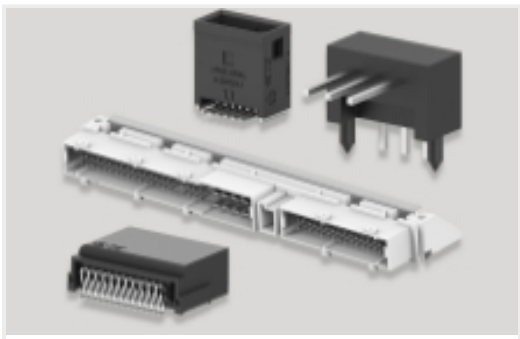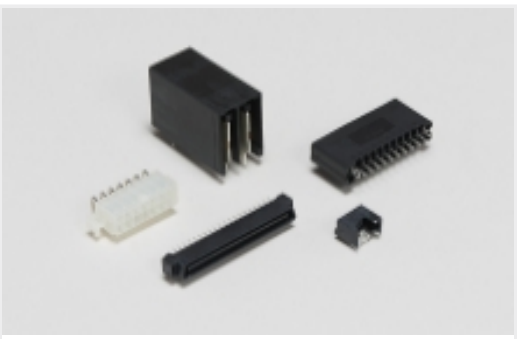			
PCB Headers & Receptacles(3)	Rectangular Connector Housings(2)	Rectangular Power Connectors(5)	Standard Rectangular Connectors(2)

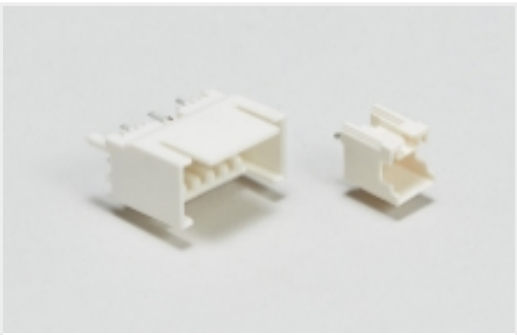


Wire-to-Board Headers & Receptacles
(3)

Customers Also Bought



TE Part #8-1622796-7
YR1 0.1% 18K2

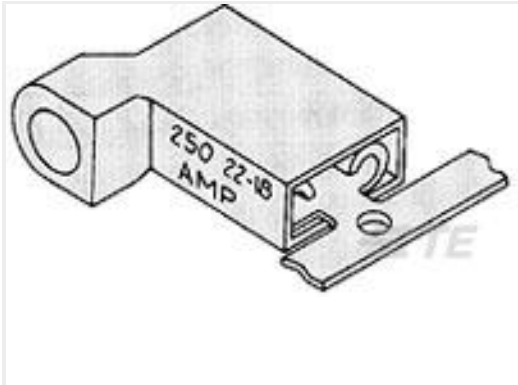

TE Part #2-520335-2
ULTRA-FAST 187 ASY REC 22-18 TPBR



TE Part #NB10892001
ATUM-4.5/1.5-0-STK



TE Part #CAT-P592-SP118
PIDG Spade Tongue Terminals



TE Part #1-1879075-5
THS25 2R0 5%



TE Part #1618002-7
EV200AAANA=RELAY, EV200 SPST-N



TE Part #2-1377174-1
SMP 0-0320559-0



TE Part #323994
SPLICE BUTT PIDG 26-24



TE Part #8-328975-1
PIDG R 22-16 COMM 22-18MIL 1/2

Documents

Product Drawings

DYNAMIC 1100D HDR ASSY V 26P X TIN

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-2329463-3_A2.2d_dxf.zip

1-2329463-3

PCB Mount Header, Vertical, Wire-to-Board, 26 Position, 2 mm [.079 in] Centerline, Fully Shrouded, Tin (Sn), Dynamic D-1100D Series



English

Customer View Model

[ENG_CVM_CVM_1-2329463-3_A2.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-2329463-3_A2.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English