

SN140/F ROGOWSKI COIL

Ø7 MM FLEXIBLE ROGOWSKI COIL WITH BUILT-IN INTEGRATOR

INTRODUCTION

SN140/F is a flexible current transducer based on Rogowski principle, particularly suitable for measurement in combination with devices. SN140/F coils are available in different sizes and can be supplied according to customer's design, therefore they can be used in all those applications, in which traditional transducers are not fitting due to its size and/or weight.

The SN140/F is offered as an all-in-one solution with a built-in integrator. This eliminates the need for any external conditioning equipment, simplifying installation and delivering significant space and cost savings. Users benefit from a compact, single-unit system that provides the required 90° phase compensation and frequency equalization.

Due to its specific features, flexible Rogowski coil is an extremely comfortable solution for current measurement and can be used in a number of cases where traditional current transducer is not the adequate solution.


SN140/F coil is provided with a shield against the influence of external magnetic fields, therefore it grants a stable measurement from low currents to several kA.

The particular features of the Rogowski coils combined with the extremely flexible input programming of our meters, allow to carry out measurement by all applications.

SN140/F series features an integrated fixing mechanism for simple and secure, direct-to-conductor mounting

FEATURES

- All-in-one solution: built-in integrator for maximum space-saving and simplified setup
- Suitable to measure currents up to several kA
- High linearity
- Very useful with large size or awkward shaped conductors or in places with limited access
- Not damaged by overloads
- Non-intrusive, no power drawn from the main
- Thanks to its light weight, it can be changed on the measured conductor
- Outdoor use on request
- Totally shielded
- Integrated Fixing Kit for quick and secure installation
- Built-in integrator: standard 333mV/ FS output
- Delivered already calibrated
- Very thin coil diameter: down to 7 mm
- Provided with an accessory to secure the coil to the busbar
- Excellent degree of rejection to the external current conductor
- Possibility to seal the locking of the coil

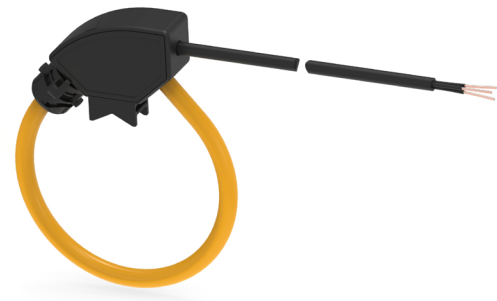

APPLICATIONS

- Measuring devices, lab instrumentation
- Power monitoring & control systems
- DC ripple measurement
- Harmonics and transients monitoring
- Very high current monitoring

APPROVALS

- Approval under multiple listing process.

BENEFITS

- The built-in integrator delivers the conditioned output signal directly, eliminating the need for an external integration box. This makes the SN140/F an optimal solution for maximizing space and cutting costs.
- The flexible coil can easily wrap around large, hard-to-reach conductors and grouped cables. The lowvoltage output ensures there is no hazard from an open secondary winding.
- Unlike traditional CTs, the coreless Rogowski coil is a non-intrusive transducer, drawing no power from the main circuit being measured
- The absence of a magnetic core grants an exceptionally wide frequency response, making the SN140/F highly suitable for accurate measurement of harmonics and transients.


SN140/F ROGOWSKI COIL

Ø7 mm Flexible Rogowski Coil with Built-in Integrator

SPECIFICATIONS

Coil	
Coil length	15 ... 40 cm
Sensor internal diameter	4 ... 12 cm
Cord diameter	7.2 ±0.2 mm
Jacket material	Polyphenylene and thermoplastic elastomer
Fastening	Bayonet holder
Weight	150 ... 500 g
Electrical Characteristics	
Power voltage	4 ... 26 VDC
Max consumption	5 mA DC
Nominal output rate	333 mV / FS (RMS values) FS changes according to the model: 200A, 250A, 600A
Positioning error	Better than ±1% of reading
Frequency	50/60 Hz
Maximum primary voltage	600 V CAT IV, Service Entrance
Pollution degree	2, Controlled Environment for indoor use model 3, Uncontrolled Environment for outdoor use model
Insulation test voltage	7400 Vrms / 5 s
Connection Cable	
Type	5 x 24 AWG shielded
Length	3 m.
Environmental Conditions	
Protection degree	IP68
Altitude	Up to 2000 m over sea-level
Operating temperature	-35 ... +75°C up to 2500 A with 15 ... 40 cm coil length
Storage temperature	-40 ... +90°C
Relative humidity	0 ... 95%
Installation and use	Controlled Environment for indoor use model

MOUNTING & FIXING

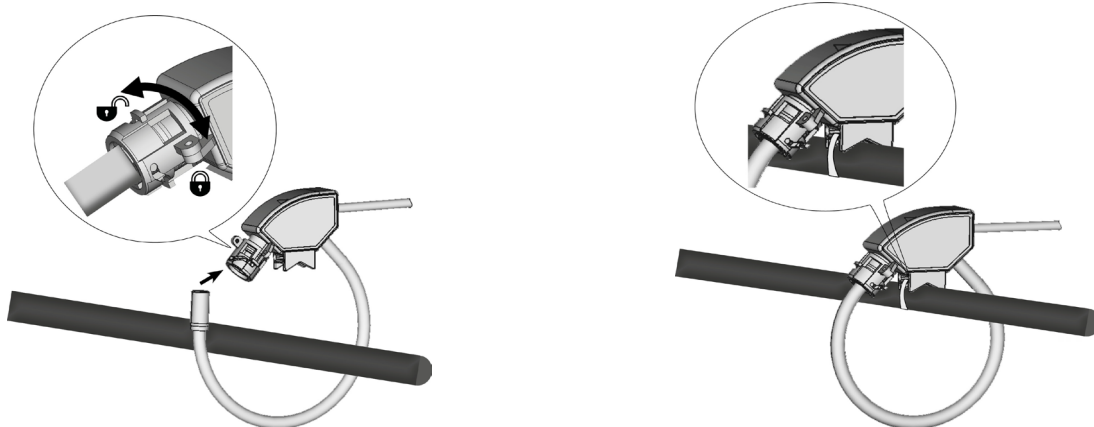


SN140/F ROGOWSKI COIL

Ø7 mm Flexible Rogowski Coil with Built-in Integrator

ORDER CODE

Part Description	Coil detail		Cable Detail	Colour	Calibrated
	Length [cm]	Internal diameter [cm]	3 m	Yellow	Yes
SN140/F (333mV/200A Output Value)					
SN140/F-15-03	15	~4 (4x5)	•	•	•
SN140/F (333mV/250A Output Value)					
SN140/F-28-03	28	~8	•	•	•
SN140/F (333mV/600A Output Value)					
SN140/F-40-03	40	~12	•	•	•

PRODUCT CODE STRUCTURE

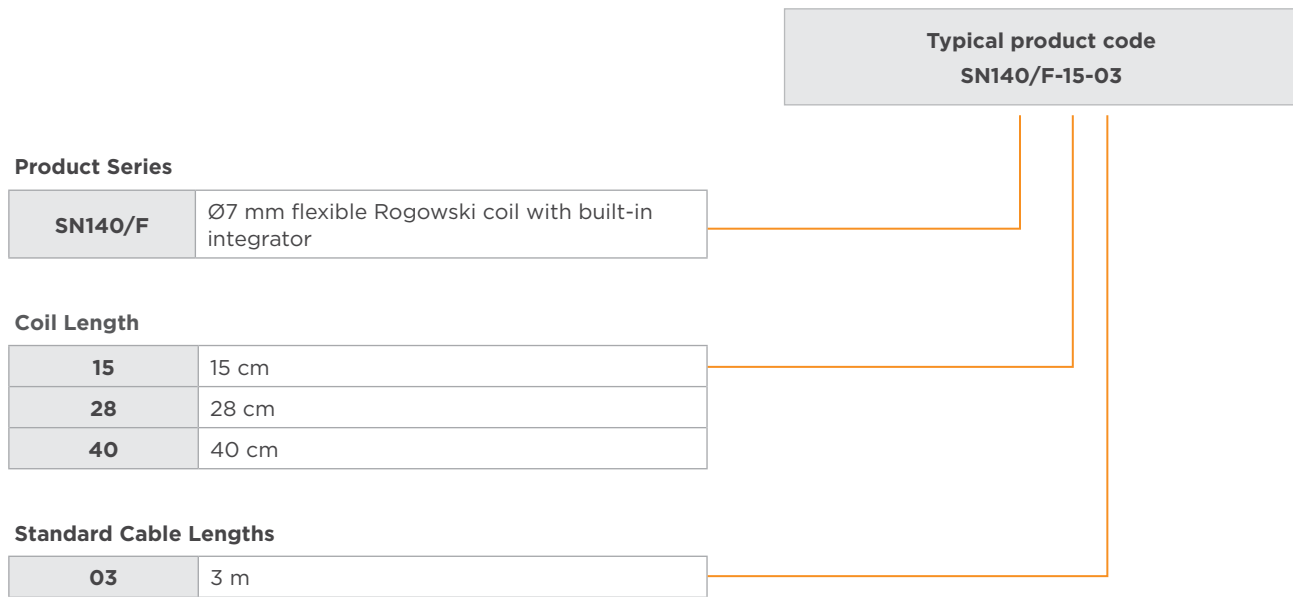

PRODUCT INFORMATION

Product Description	Output Value (mV)	Coil Length (cm)	Standard Color	Part Number
SN140/F-15-03	100mV/1kA @ 50Hz	15	Yellow	2548321-1
SN140/F-28-03	100mV/1kA @ 50Hz	28	Yellow	2548322-1
SN140/F-40-03	100mV/1kA @ 50Hz	40	Yellow	2548323-1

What is a Rogowski coil?

Rogowski coils have been used for the detection and measurement of electric currents for decades. They are based on a simple principle: an “air-cored” coil is placed around the conductor in a toroidal fashion and the magnetic field produced by the current induces a voltage in the coil. The voltage output is proportional to the rate of change of current. This voltage is integrated, thus producing an output proportional to the current.

By using precision winding techniques, especially developed for the purpose, the coils are manufactured so that their output is not influenced by the position of the conductor within the toroid, and to reject interference from external magnetic fields caused, for example, from nearby conductors. Basically, a Rogowski coil current measuring system consists of a combination of a coil and conditioning electronics. Rogowski coil current transducers are used for the AC measurement.

They can be used in similar circumstances to current transformers but for many applications they have considerable advantages:

- Wide dynamic range, the same coil can be used to measure currents up to several kA.
- High linearity. According to the manufacturing (size, inductance value, ...) the maximum measurable frequency can range up to several kHz.
- Unlike traditional current transducers, there is no danger from open-circuited secondaries.
- They cannot be damaged by large overloads, are non-intrusive, draw no power from the main circuit carrying the current to be measured.

The transducer does not measure direct currents but, unlike a current transformer, it can carry out accurate measurements of AC component even if there is a large superimposed DC component. This feature is particularly useful for measuring ripple currents for example in battery charging systems.

te.com

©2026 TE Connectivity Plc. Family of Companies. All Rights Reserved.

TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks owned or licensed by the TE Connectivity Plc. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

02/26 ED