



DATA SHEET

WLG12P-34162120A00ZDZZZZZZZZZZ1

W12
Photoelectric sensors

SICK Sensor Intelligence



Illustration may differ

PHOTOELECTRIC SENSORS

WLG12P-34162120A00ZDZZZZZZZZ1

ORDERING INFORMATION

Type	part no.
WLG12P-34162120A00ZDZZZZZZZZ1	1150054

Further device versions and accessories at www.sick.com/W12



DETAILED TECHNICAL DATA

FEATURES

Functional principle	Photoelectric retro-reflective sensor
Functional principle detail	Without reflector minimum distance (autocollimation/coaxial optics), ClearSens, MultiMode
MultiMode	1 Highly-transparent objects 2 Semi-transparent objects 3 Opaque objects 4 Bottles/Trays 5 Check of foil tear 6 Manual (specific setting via IO-Link)
Sensing range	Sensing range min. Sensing range max. Maximum distance range from reflector to sensor (operating reserve 1) Recommended distance range from reflector to sensor (operating reserve 3,75) Reference reflector Recommended sensing range for the best performance 0 m 7.6 m 0 m ... 7.6 m 0 m ... 4.9 m Reflector PL80A 0 m ... 4.9 m
Polarisation filter	Yes
Emitted beam	Light source Type of light Shape of light spot Light spot size (distance) Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle) PinPoint LED Visible red light Point-shaped 70 mm (5 m) < +/- 1.5° (at T_U = +23 °C)
Key LED figures	Normative reference LED risk group marking Wave length Average service life EN 62471:2008-09 IEC 62471:2006, modified Free group 635 nm 100,000 h at T_a = +25 °C
Adjustment	Teach-Turn adjustment BluePilot

Display	IO-Link	Teach-in plus user mode selector For configuring the sensor parameters and Smart Task functions
	LED blue	BluePilot: Mode display
	LED green	Operating indicator Static on: power on Flashing: IO-Link mode
	LED yellow	Status of received light beam Static on: object not present Static off: object present Flashing: Below the 1.5 function reserve
Special applications		Detecting objects wrapped in film, Detecting transparent objects

SAFETY-RELATED PARAMETERS

MTTF _D	1,467 years
DC _{avg}	0%
T _M (mission time)	20 years

COMMUNICATION INTERFACE

IO-Link	✓, IO-Link V1.1
Data transmission rate	COM2 (38,4 kBaud)
Cycle time	2.3 ms
Process data length	8 Bit
Process data structure	Bit 0 = switching signal Bit 1 = alarm QoR Bit 2 = switching signal Q _{L1} Bit 3 = switching signal Q _{L2} Bit 4 ... 7 = empty
VendorID	26
DeviceID HEX	0x800391
DeviceID DEC	8389521
Supported DeviceIDs for predecessor DEZ models	8388850
Compatible master port type	A
SIO mode support	Yes

ELECTRONICS

Supply voltage U _B	10 V DC ... 30 V DC ¹⁾
Ripple	≤ 5 V
Usage category	DC-12 (According to EN 60947-5-2) DC-13 (According to EN 60947-5-2)
Current consumption	≤ 40 mA, without load. At U _B = 24 V
Protection class	III
Digital output	Number 2 (Complementary) Type Push-pull: PNP/NPN Switching mode Light/dark switching Signal voltage PNP HIGH/LOW Approx. U _B - 2.5 V / 0 V Signal voltage NPN HIGH/LOW Approx. U _B / < 2.5 V Output current I _{max} ≤ 100 mA Circuit protection outputs Reverse polarity protected Overcurrent protected Short-circuit protected Response time ≤ 330 μs Repeatability (response time) 100 μs

¹⁾ Limit values.

²⁾ This switching output must not be connected to another output.

Switching frequency		1,500 Hz
Pin/Wire assignment		
	Function of pin 4/black (BK)	Digital output, light switching, object present → output Q _{OUT} LOW ²⁾ IO-Link communication C
	Function of pin 4/black (BK) – detail	The pin 4 function of the sensor can be configured Additional possible settings via IO-Link
	Function of pin 2/white (WH)	Digital output, dark switching, object present → output Q _{OUT} HIGH ²⁾
	Function of pin 2/white (WH) – detail	The pin 2 function of the sensor can be configured Additional possible settings via IO-Link

¹⁾ Limit values.

²⁾ This switching output must not be connected to another output.

MECHANICS

Housing		Rectangular
Dimensions (W x H x D)		15.6 mm x 49.5 mm x 43.1 mm
Connection		Cable with plug, M12, 4-pin, 318 mm
Connection detail		
	Deep-freeze property	Do not bend below 0 °C
	Conductor size	0.14 mm ²
	Cable diameter	Ø 3.4 mm
	Length of cable (L)	270 mm
	Length of male connector	48 mm
	Bending radius	For flexible use > 12 x cable diameter
	Bending cycles	1,000,000
Material		
	Housing	Metal, zinc diecast
	Front screen	Plastic, PMMA
	Cable	Plastic, PVC
	Male connector	Plastic, VISTAL®
Weight		Approx. 94 g
Maximum tightening torque of the fixing screws		1.4 Nm

AMBIENT DATA

Enclosure rating		IP66 (EN 60529) IP67 (EN 60529) IP69 (EN 60529)
Ambient operating temperature		–40 °C ... +60 °C
Ambient temperature, storage		–40 °C ... +75 °C
Typ. Ambient light immunity		Artificial light: ≤ 50,000 lx Sunlight: ≤ 50,000 lx
Shock resistance		50 g, 11 ms (25 positive and 25 negative shocks along X, Y, Z axes, 150 total shocks (EN60068-2-27))
Vibration resistance		10 Hz ... 2,000 Hz (Amplitude 0.5 mm / 10 g, 20 sweeps per axis, for X, Y, Z axes, 1 octave/min, (EN60068-2-6))
Air humidity		35 % ... 95 %, relative humidity (no condensation)
Electromagnetic compatibility (EMC)		EN 60947-5-2
Resistance to cleaning agent		ECOLAB
UL File No.		NRKH.E181493 & NRKH7.E181493

SMART TASK

Smart Task name	Base logics
Logic function	Direct AND

¹⁾ Use of Smart Task functions without IO-Link communication (SIO mode).

²⁾ Use of Smart Task functions with IO-Link communication function.

	OR
Timer function	Deactivated Switch-on delay Off delay ON and OFF delay Impulse (one shot)
Inverter	Yes
Switching frequency	SIO Logic: 1300 Hz ¹⁾ IOL: 1200 Hz ²⁾
Response time	SIO Logic: 390 µs ¹⁾ IOL: 420 µs ²⁾
Repeatability	SIO Logic: 140 µs ¹⁾ IOL: 170 µs ²⁾
Switching signal	Switching signal Q _{L1} Switching output Switching signal Q̄ _{L1} Switching output

¹⁾ Use of Smart Task functions without IO-Link communication (SIO mode).

²⁾ Use of Smart Task functions with IO-Link communication function.


DIAGNOSIS

Device temperature	Measuring range	Very cold, cold, moderate, warm, hot
Device status		Yes
Detailed device status		Yes
Operating hour counter		Yes
Operating hours counter with reset function		Yes
Quality of teach		Yes
Quality of run		Yes, Contamination display

CERTIFICATES


EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓
China Compulsory Product Certification (CCC) ex-empt	✓
ECOLAB certificate	✓
cULus certificate	✓
IO-Link certificate	✓
Photobiological safety (IEC EN 62471)	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓

DIMENSIONAL DRAWING, SENSOR

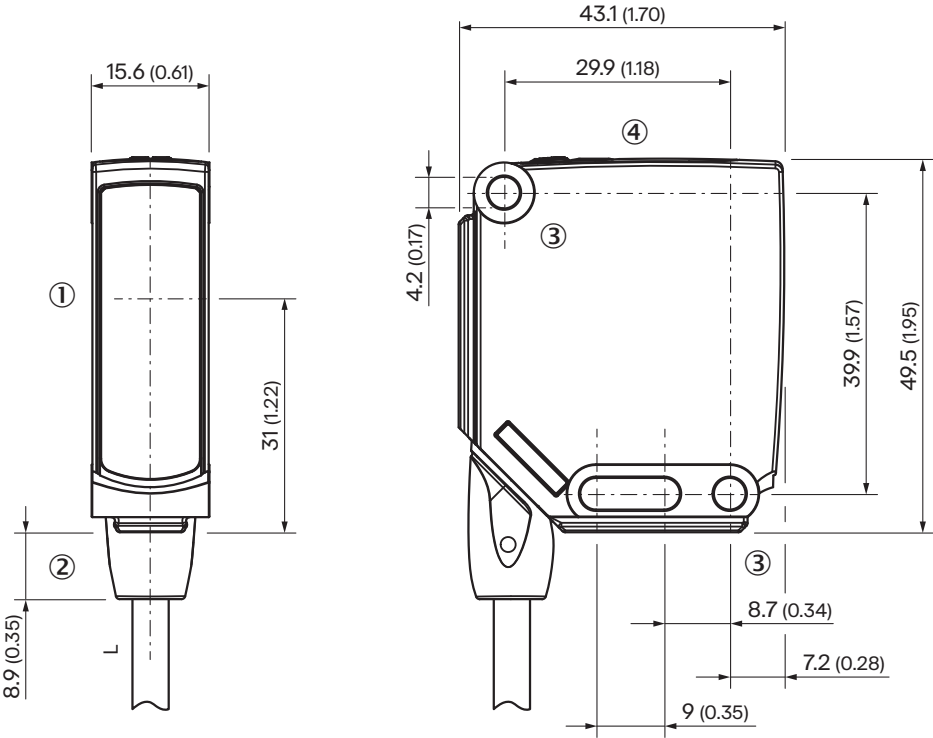


Dimensions in mm (inch)
① Center of optical axis
② Connection
③ Mounting hole, Ø 4.2 mm
④ display and adjustment elements

DIMENSIONAL DRAWING, CONNECTION

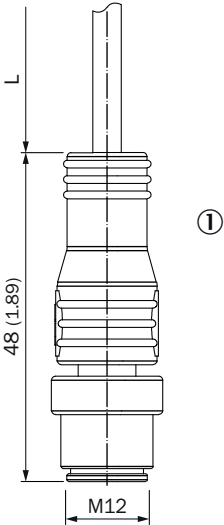


Dimensions in mm (inch)
For length of cable (L), see technical data
① Cable with M12 male connector

DISPLAY AND ADJUSTMENT ELEMENTS

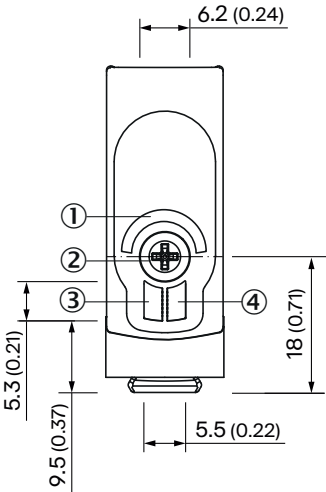

- ① LED blue
- ② Teach-Turn adjustment
- ③ LED green
- ④ LED yellow


DISPLAY AND SETTING DETAIL

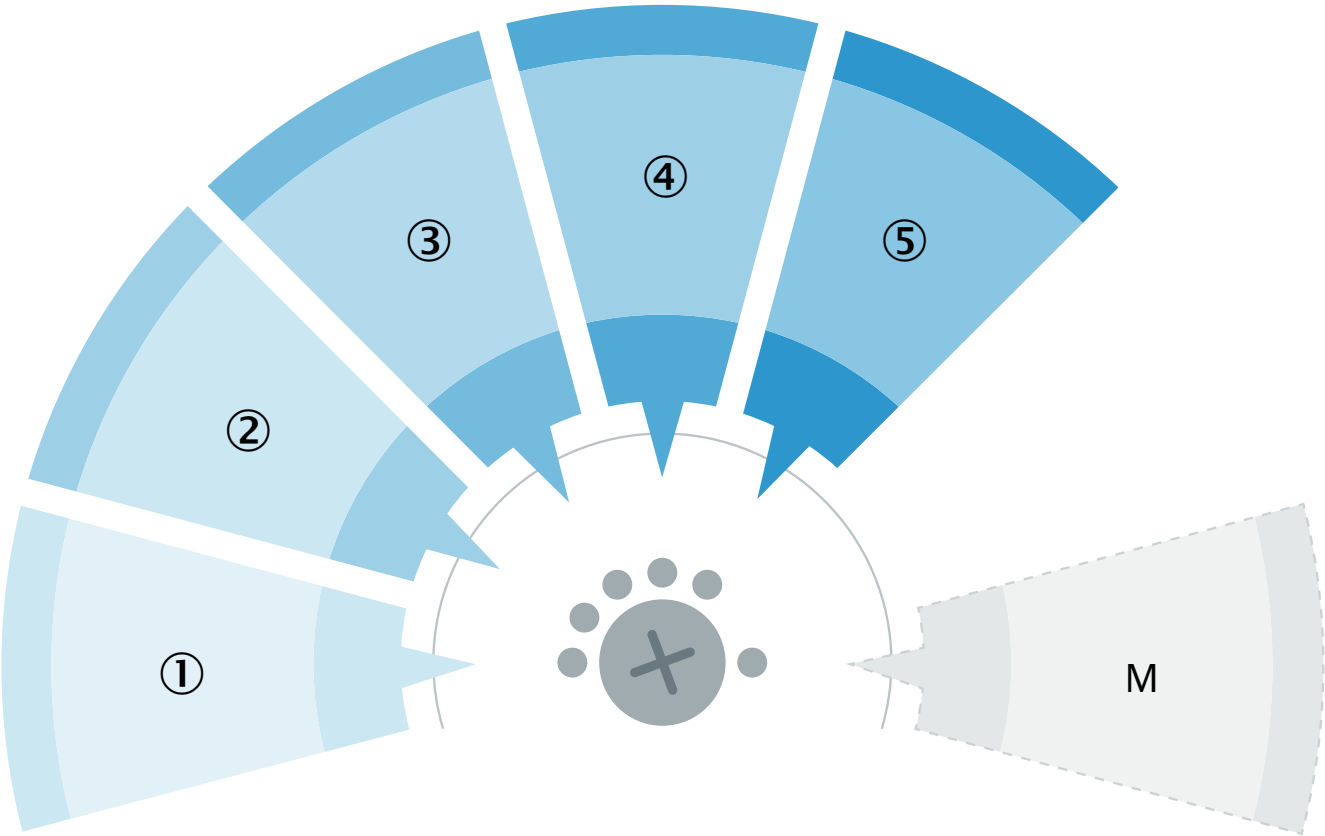


MultiMode settings		
1	Highly-transparent objects	Attenuation of > 10%:Highly transparent filmsGlass panes
2	Semi-transparent objects	Attenuation of > 18%:Transparent frosted glassThick, transparent films
3	Opaque objects	Attenuation of > 50%:Opaque objects

MultiMode settings		
4	Bottles/Trays	Special mode for maximum reliability:BottlesTrays
5	Check of foil tear	Special mode:Check of foil tear
M	Manual	Custom configuration via IO-Link

CONNECTION TYPE M12 MALE CONNECTOR, 4-PIN



CONNECTION DIAGRAM CD-490




TRUTH TABLE PUSH-PULL: PNP/NPN – DARK SWITCHING $\bar{Q}$

	Dark switching $\bar{Q}$ (normally open (upper switch), normally closed (lower switch))	
	Object not present → Output LOW	Object present → Output HIGH
Light receive	✓	✗
Light receive indicator	☀	✗
Load resistance to L+	⚡	✗
Load resistance to M	✗	⚡

TRUTH TABLE PUSH-PULL: PNP/NPN - LIGHT SWITCHING Q

	Light switching Q (normally closed (upper switch), normally open (lower switch))	
	Object not present → Output HIGH	Object present → Output LOW
Light receive	✓	✗
Light receive indicator	☀	✗
Load resistance to L+	✗	⚡
Load resistance to M	⚡	✗


CHARACTERISTIC CURVE CHEMICAL-RESISTANT REFLECTORS

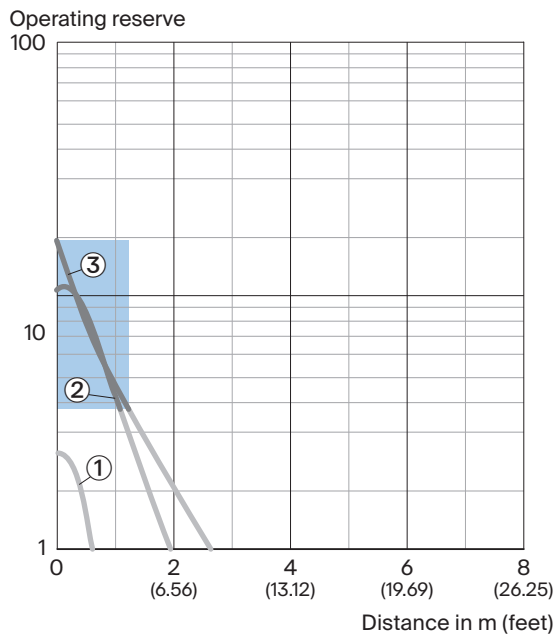

Recommended sensing range for the best performance


- ① PL10F CHEM reflector
- ② Reflector PL20 CHEM
- ③ Reflector P250 CHEM

CHARACTERISTIC CURVE FINE TRIPLE REFLECTORS

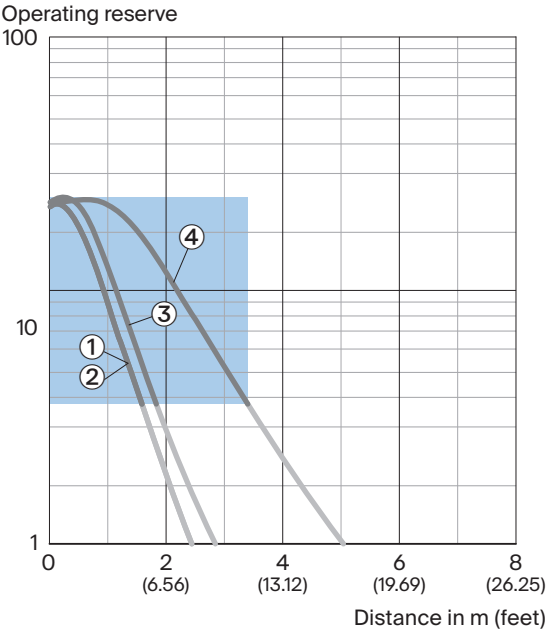


- Recommended sensing range for the best performance
- ① PL10FH-1 reflector
 - ② PL10F reflector
 - ③ Reflector PL20F
 - ④ Reflector P250F

CHARACTERISTIC CURVE REFLECTIVE TAPE

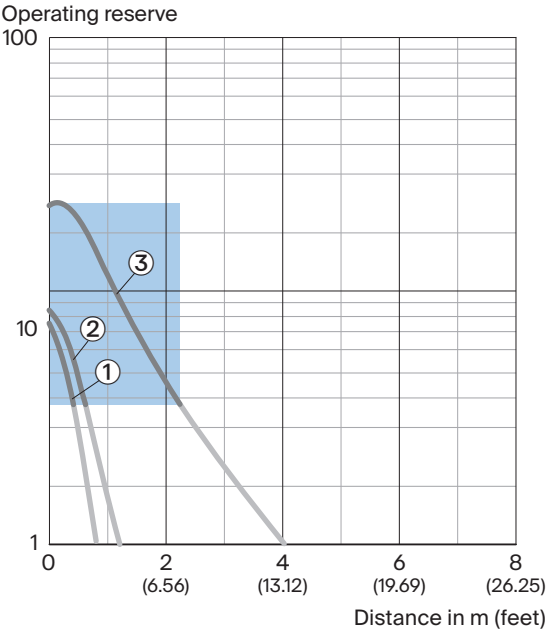


- Recommended sensing range for the best performance
- ① Reflective tape REF-DG
 - ② Reflective tape REF-IRF-56
 - ③ Reflective tape REF-AC1000

CHARACTERISTIC CURVE STANDARD REFLECTORS

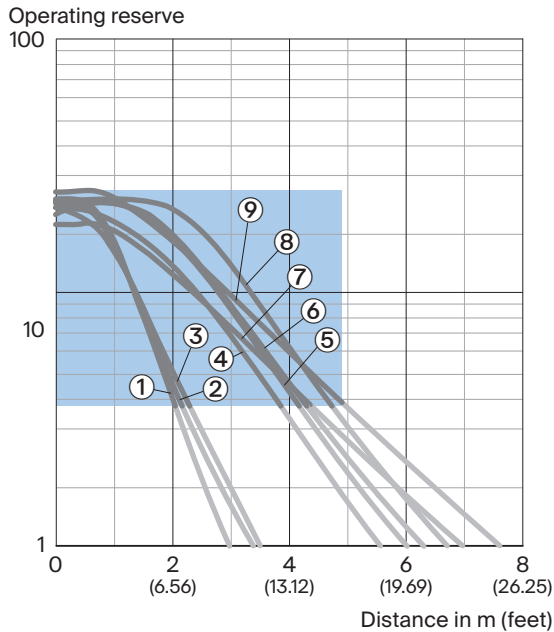


- ① reflector PL22-2
- ② Reflector P250H
- ③ Reflector PL20A
- ④ Reflector PL30A
- ⑤ Reflector P250
- ⑥ Reflector PL40A
- ⑦ Reflector PL40A Antifog
- ⑧ Reflector C110A
- ⑨ Reflector PL80A

LIGHT SPOT SIZE

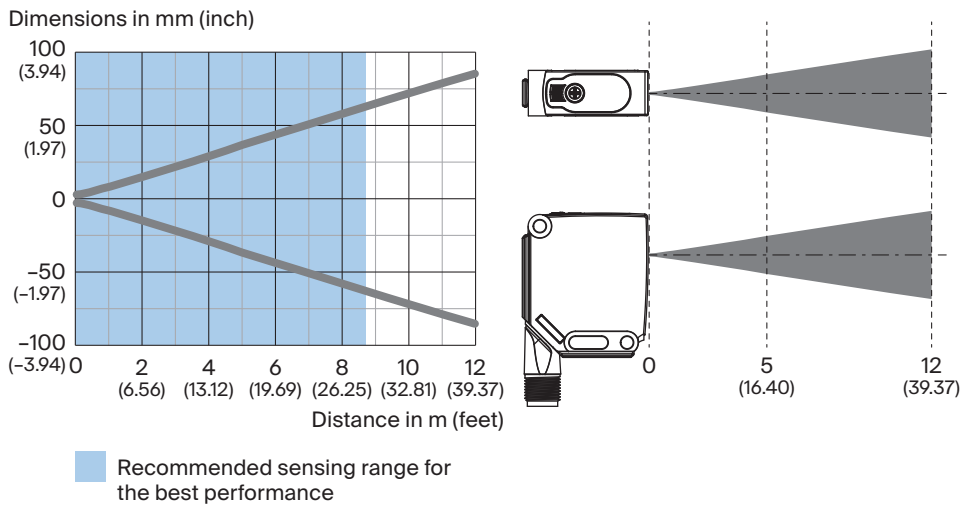


SENSING RANGE DIAGRAM CHEMICAL-RESISTANT REFLECTORS

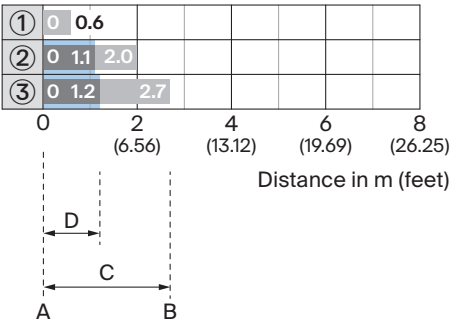

Recommended sensing range for the best performance

1	PL10F CHEM reflector
2	Reflector PL20 CHEM
3	Reflector P250 CHEM
A	Sensing range min. in m
B	Sensing range max. in m
C	Maximum distance range from reflector to sensor (operating reserve 1)
D	Recommended distance range from reflector to sensor (operating reserve 3,75)


SENSING RANGE DIAGRAM FINE TRIPLE REFLECTORS

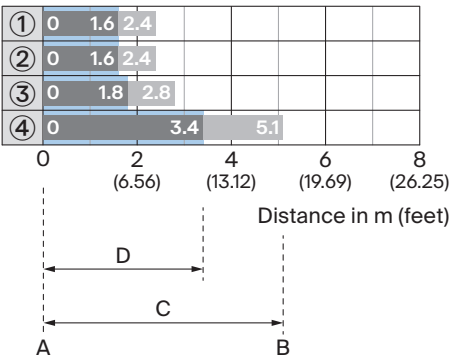

Recommended sensing range for the best performance

1	PL10FH-1 reflector
2	PL10F reflector
3	Reflector PL20F
4	Reflector P250F
A	Sensing range min. in m
B	Sensing range max. in m
C	Maximum distance range from reflector to sensor (operating reserve 1)
D	Recommended distance range from reflector to sensor (operating reserve 3,75)


SENSING RANGE DIAGRAM REFLECTIVE TAPE

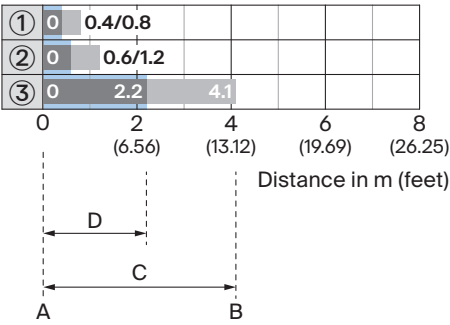

Recommended sensing range for the best performance

1	Reflective tape REF-DG
2	Reflective tape REF-IRF-56
3	Reflective tape REF-AC1000
A	Sensing range min. in m
B	Sensing range max. in m
C	Maximum distance range from reflector to sensor (operating reserve 1)
D	Recommended distance range from reflector to sensor (operating reserve 3,75)

SENSING RANGE DIAGRAM STANDARD REFLECTORS

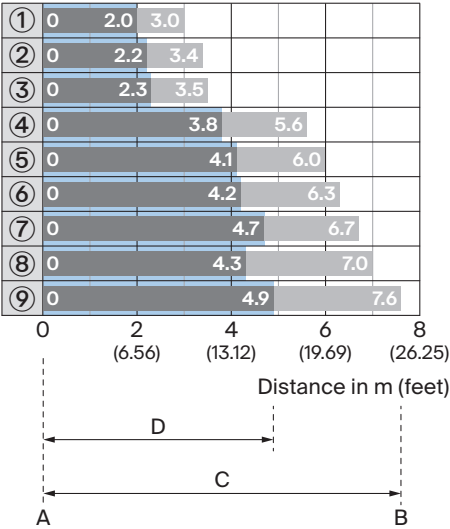

Recommended sensing range for the best performance

1	Reflector PL22-2
2	Reflector P250H
3	Reflector PL20A
4	Reflector PL30A
5	Reflector P250
6	Reflector PL40A
7	Reflector PL40A Antifog
8	Reflector C110A
9	Reflector PL80A

A	Sensing range min. in m
B	Sensing range max. in m
C	Maximum distance range from reflector to sensor (operating reserve 1)
D	Recommended distance range from reflector to sensor (operating reserve 3,75)

Further information as well as suitable accessories, example applications and downloads such as CAD di-
mensional models, operating instructions and software can be found at www.sick.com/1150054



SICK AG
WALDKIRCH
GERMANY
SICK.COM

SICK AT A GLANCE

SICK is a leading global technology company for intelligent sensors and integrated solutions in industrial automation. Our technologies set benchmarks, making your industrial processes more efficient, safer and more sustainable – both in logistics and manufacturing operations.

SICK combines sensor intelligence with industry expertise and certified consulting services. We provide the ideal foundation for scalable as well as tailor-made automation solutions and create added value along the entire value chain. Our close partnerships with our customers are more than just a promise: Together, we optimize productivity, improve quality, protect health and safety, and help build a sustainable future. All with empathy and trust.

Since 1946, we have been developing innovative technologies with passion and a pioneering spirit. With a global network in around 40 countries, SICK has a global presence and is always close by. The company's headquarters are located in Waldkirch near Freiburg, Germany. Our customers benefit from our understanding of both local and global requirements, which enables us to deliver tailor-made solutions

SICK
Sensor Intelligence