




AMP-LATCH

TE Internal #: 1-5111595-1

Board-In PCB Mount Paddleboard Connector, Vertical, Cable-to-Board, 50 Position, .64 mm / 1.27 mm [.05 in] Centerline, Ribbon Cable

[View on TE.com >](#)

Connectors > PCB Connectors > Board-In Connectors



PCB Connector Type: **PCB Mount Paddleboard Connector**

PCB Mount Orientation: **Vertical**

Connector System: **Cable-to-Board**

Number of Positions: **50**

Centerline (Pitch): **.64 mm, 1.27 mm [.05 in]**

Features

Product Type Features

PCB Connector Type	PCB Mount Paddleboard Connector
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board, Wire & Cable

Configuration Features

PCB Mount Orientation	Vertical
Number of Positions	50
Compatible With Wire & Cable Type	Ribbon Cable
Number of Rows	4

Electrical Characteristics

Operating Voltage	30 VAC
Insulation Resistance	5000 MΩ

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

PCB Contact Termination Area Plating Material Thickness	2.54 – 5.08 μm[100 – 200 μin]
Contact Base Material	Copper Alloy
Wire Contact Termination Area Plating Thickness	2.54 – 5.08 μm[100 – 200 μin]
PCB Contact Termination Area Plating Material	Tin-Lead



Wire Contact Termination Area Plating Material	Tin-Lead
Contact Current Rating (Max)	.5 A

Termination Features

Rectangular Termination Post & Tail Width	.61 mm[.024 in]
Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Termination Post & Tail Length	2.54 mm[.1 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

PCB Mount Alignment	Without
PCB Mount Retention	Without

Housing Features

Centerline (Pitch)	.64 mm, 1.27 mm[.05 in]
Housing Material	Thermoplastic

Dimensions

Row-to-Row Spacing	2 mm
Connector Height	6.93 mm[.548 in]
Connector Length	36.47 mm[1.44 in]
Wire Size	32 – 30 AWG

Usage Conditions

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	70
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Customers Also Bought

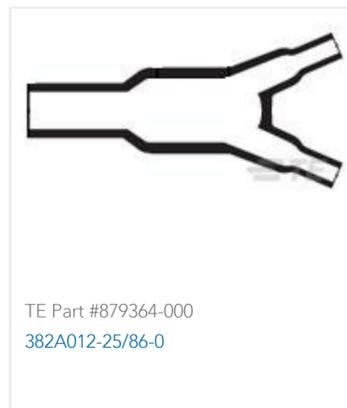



Documents

Product Drawings

050 ASSY SYS 50 PADDLEBOARD

English

CAD Files

Customer View Model

[ENG_CVM_CVM_1-5111595-1_C.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1-5111595-1_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-5111595-1_C.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMPMODU_INTERCONNECTION_SYSTEM_SECTION3AND4

English

Ribbon Cable Interconnect Solutions

English

Product Specifications

Application Specification

English

1-5111595-1

Board-In PCB Mount Paddleboard Connector, Vertical, Cable-to-Board, 50 Position, .
64 mm / 1.27 mm [.05 in] Centerline, Ribbon Cable

