



**Shorting cap plug**

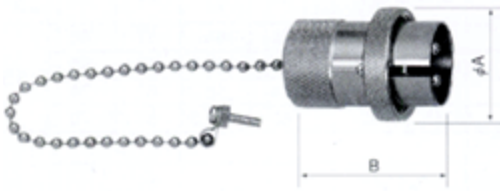


S Type	*Number of contacts	A	B
NCS -25*-SP	2, 3, 4, 5, 6, 7, 8	28.5	38
NCS -30*-SP	2, 3, 4, 5, 6, 7, 7H, 8, 13	34	41
NCS -40*-SP	2, 3, 4, 5, 6, 8, 10, 12, 16, 20	46	56
NCS -50*-SP	2, 3	57	82
NCS -50*-SP	4, 8, 10, 15, 25	57	72
NCS -60*-SP	2, 3, 4	67	83
NCS -60*-SP	10, 15, 30, 32	67	73

**Shorting cap plug**

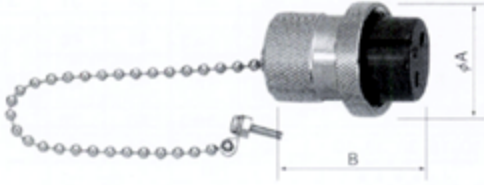


G Type	*Number of contacts	A	B
NCS -25*-SPM	2, 3, 4, 5, 6, 7	28.5	38.5
NCS -30*-SPM	2, 3, 4, 5, 6, 8	34	43
NCS -40*-SPM	2, 3, 4, 5, 6, 8, 10, 12, 16, 20	52	57
NCS -50*-SPM	2, 3	65	91
NCS -50*-SPM	4, 8, 10, 15, 25	65	81
NCS -60*-SPM	2, 3, 4	78	96
NCS -60*-SPM	10, 15, 30, 32	67	75

**Pipe threads plug**

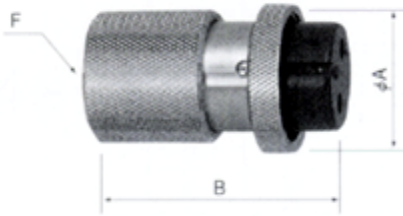

S Type	*Number of contacts	A	B
NCS -25*-SP	2, 3, 4, 5, 6, 7, 8	28.5	38
NCS -30*-SP	2, 3, 4, 5, 6, 7, 7H, 8, 13	34	41
NCS -40*-SP	2, 3, 4, 5, 6, 8, 10, 12, 16, 20	46	56
NCS -50*-SP	2, 3	57	82
NCS -50*-SP	4, 8, 10, 15, 25	57	72
NCS -60*-SP	2, 3, 4	67	83
NCS -60*-SP	10, 15, 30, 32	67	73


**Shorting cap plug**

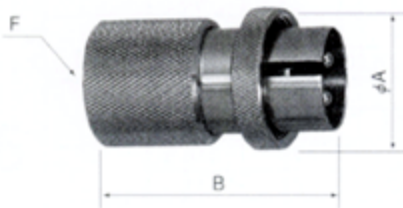

G Type	*Number of contacts	A	B
NCS -25*-SPM	2, 3, 4, 5, 6, 7	28.5	38.5
NCS -30*-SPM	2, 3, 4, 5, 6, 8	34	43
NCS -40*-SPM	2, 3, 4, 5, 6, 8, 10, 12, 16, 20	52	57
NCS -50*-SPM	2, 3	65	91
NCS -50*-SPM	4, 8, 10, 15, 25	65	81
NCS -60*-SPM	2, 3, 4	78	96
NCS -60*-SPM	10, 15, 30, 32	67	75

**Accessories**

**Plug cap (PCa)**



Shell size	A	B
NCS-14-PCa	18	17
NCS-16-PCa	21.5	18
NCS-25-PCa	28.5	20
NCS-30-PCa	34	23
NCS-40-PCa	46	23
NCS-44-PCa	52	24
NCS-50-PCa	57	39
NCS-54-PCa	65	40
NCS-60-PCa	67	40
NCS-64-PCa	78	40

**Receptacle cap (RCa)**

Also for adapter



Shell size	A	B
NCS-14-PCa	18	17
NCS-16-PCa	21.5	18
NCS-25-PCa	28.5	20
NCS-30-PCa	34	23
NCS-40-PCa	46	23
NCS-44-PCa	52	24
NCS-50-PCa	57	39
NCS-54-PCa	65	40
NCS-60-PCa	67	40
NCS-64-PCa	78	40

**NCS and NWPC tools**

Contacts with NCS and NWPC rated currents of least 80A have structures which can be removed from insulators. When soldering, do so after removing the contact.