


Ordering number CA11017_TINA2-M

Family	Tina2	FWHM	30 degrees
Type	Assembly	Efficiency	(simulated) 0 %
LED	XP-E-HEW	cd/lm	2.290
Color	Black	Gerber File	Available
Diameter	16.1 mm		
Height	9.7 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Tape		
Status	Ready		

Ordering number CA11052_TINA2-O

Family	Tina2	FWHM	34+16 degrees
Type	Assembly	Efficiency	(simulated) 0 %
LED	XP-E-HEW	cd/lm	3.360
Color	Black	Gerber File	Available
Diameter	16.1 mm		
Height	9.7 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Tape		
Status	Ready		

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



PRODUCT DATASHEET Tina2 series

last update 14/11/2012

GENERAL INFORMATION

- Product series especially designed & optimized for XP-E-HEW series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Lens material optical grade PMMA with high UV and temperature resistance. Allows use of high current and temperature conditions.

Please find more information about used material from below:

http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20UL94_Yellow%20Card.pdf

<http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20PLEXIGLAS-Datasheet.pdf>

- Optic holder molded by high quality PC material (120 degrees of Celcius / 248 degrees of Fahrenheit).

- Fastening to heat sink with a PU foam adhesive tape of automotive grade. Please find fastening details by clicking link: http://www.ledil.com/datasheets/DataSheet_TAPE.pdf


NOTE 1: We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit board weaken the strength of the tape.

NOTE 2: Assembly to the surface must be made straight, so the tape bonds constant and balanced with fastening surface. Slanted assembly might cause unbalanced bond to the surface. All surfaces where tape is applied must be clean, dry and free from grease and dirt.

If cleaning of PCB surfaces is needed, please follow strictly the cleaning instructions of your LED manufacturer - this is important as cleaning shall under no circumstances damage LEDs or other electronics components on the PCB.

Further note that optical components shall not be cleaned with any chemicals - only micro fiber cloth may be used to remove fingerprints or other traces from handling.

Relative intensity of CA11052_Tina2-XP-O-black_HEW

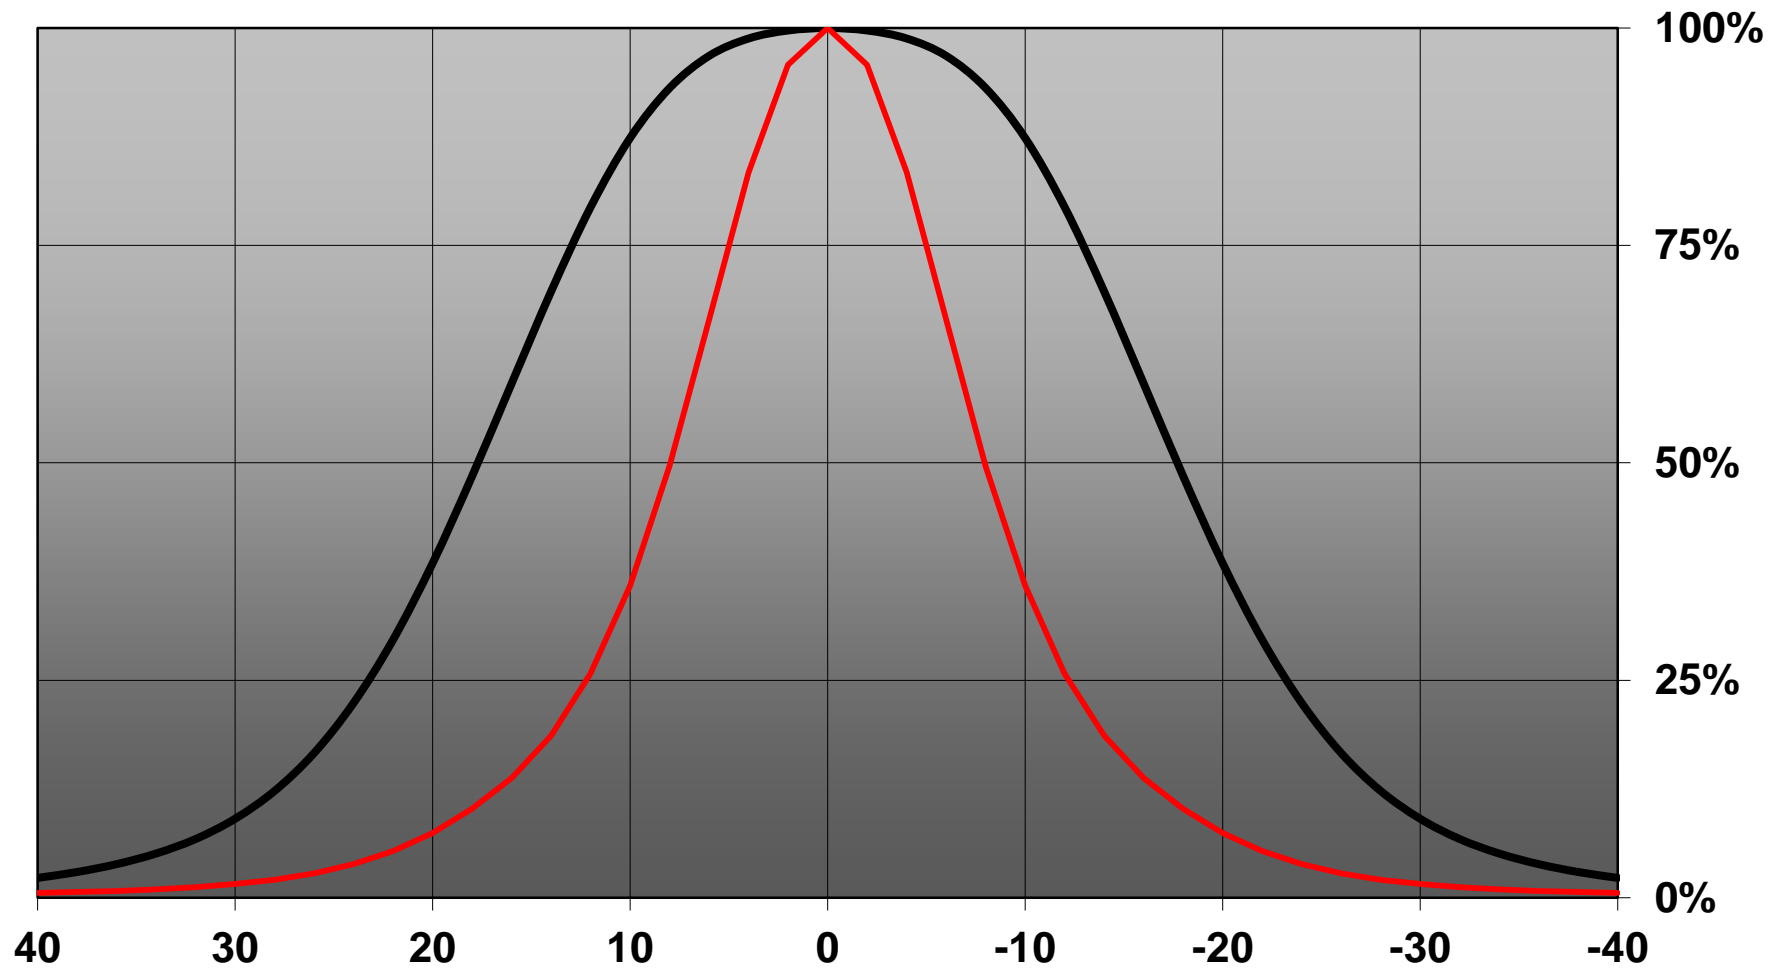

D C B A

4

Oval beam direction

∅16.1

4

3

Lens

Holder

9.7

3

Tape

2

MATERIALS

Lens: PMMA

Holder: PC

Tape: PU Foam with PSA

Part no.s:

CA11016_Tina2-XP-RS

CA11017_Tina2-XP-M

CA11052_Tina2-XP-O

CA11420_Tina2-XP-D

2

1

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.



L
T
F
F

e
e
i
i
N
n

d

DRAWING TITLE

Datasheet Tina2-XP Tape series

1

DRAWN BY

p

DATE

v20.3.2012

CHECKED BY

s

n

DATE

28.07.2010

SIZE

A4

DRAWING NUMBER

-

REV

3

DESIGNED BY

HH

DATE

09.11.2009

SCALE

2:1

WEIGHT (g)

-

SHEET

1/1

D

A