

Customer: ROXBURGH ELECTRONICS LIMITED

No. SS-96-1115

Date: Jan. 31, 1996

Attention:

Your ref. No:

Your Part. No: 22 6068

SPECIFICATIONS

ALPS:

MODEL RSA0N1219
(10kA X 2)

Spec. No.:

Sample No. : 60446296M

RECEIPT STATUS

RECEIVED

By. Date

Signature

Name

Title

ALPS ELECTRIC CO., LTD.

HEAD OFFICE
1-7, YUKIGAYA-OHTSUKA-CHO,
OHTA-KU, TOKYO 145 JAPAN

DSG'D

APP'D

ENG. DEPT. DIVISION

Sales

SPECIFICATIONS

1. THIS SPECIFICATIONS APPLY TO RSAON1219 POTENTIOMETERS.

2. CONTENTS OF THIS SPECIFICATIONS.

4SA02R-003
4S0001-200
4S0001-202M
SA02RG903

3. MARKING

· MARKING ON ALL UNITS
DATE CODE, RESIST. VALUE, TAPER, TRADE MARK

4. REMARKS

· NOTES

· Marking $\Rightarrow$ in specifications shows standard and condition for application.

1. Environment 一般事項

1.1 Operating temperature range 使用温度範囲 -10-60°C

1.2 Storage temperature range 保存温度範囲 -30-70°C

1.3 Test conditions

試験条件

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and test is as follows.

Ambient temperature: 5°C to 35°C

Relative humidity: 45% to 85%

Air pressure: 850mbar to 1060 mbar.

If there is any doubt about the results, measurements shall be made within the following limits.

Ambient temperature: 20±2°C

Relative humidity: 60 to 70%

Air pressure: 850mbar to 1060 mbar.

試験及び測定は特に規定がない限り温度5-35°C、
相対湿度45-85%、気圧860-1060mbarの標準状態
のもとで行う。ただし、判定に疑義を生じた場合は温度20±2°C、
相対湿度65±5%、気圧860-1060mbarにて行う。

2. Appearance 外観

The potentiometer shall be well done and not have any excessive rust, crack, split, poor plating and discolor in any portion.



各部の仕上げは良好で機能上有害なサビ、キズ、ワレ、
メッキ不良及び剥離などがあってはならない。

3. Electrical characteristics 電気的性能

Item 項目	Conditions 条件	Specifications 規格				
		5	10	20	50	100
3.1	Nominal total resistance and tolerance 公称全抵抗値および許容差	200 250 500 ±20% (KΩ)				
3.2	Power rating 定格電力	0.25W				
3.3	Rated voltage 定格電圧	DC 10V AC350V				
3.4	Resistance law (Taper) 抵抗変化特性	Refer to page 6/6 6/6 5/5ページ参照				

ALPS ELECTRIC CO., LTD.				
APPD.	CHKD.	DSGD.	TITLE	
Sep. 11 '91	Sep. 11 '91	Sep. 7 '91	SPECIFICATIONS	
DOCUMENT NO.			4SA02R-003 (1/6)	
SYMB.	DATE	APPD.	CHKD.	DSGD.
△ 1	2000.08.22	Y.Y.		


CLASS. NO.	TITLE
	MASTER TYPE POTENTIOMETER (SLIDE)

	Item 項目	Conditions 条件	Specifications 規格										
3.5	Attenuation and insertion loss 最大減衰量と挿入損失	The attenuation and insertion loss at each end of lever travel shall be measured. しゅう動子を移動距離の各終端に置いたとき 最大減衰量、挿入損失を測定する。 The voltage of 2 V_{r.m.s.} to 15 V_{r.m.s.} shall be applied between terminal 1 and 3 by measuring frequency at 1 kHz. The output voltage shall be measured between terminals 1 and 2 and between terminals 2 and 3. If there is not any doubt about the results, DC voltage shall be used as the test voltage. 端子1-3間に1kHzで2-15V (正弦波実効値)の電圧を加え、端子1-2間、端子2-3間の出力電圧を測定する。なお、判定に疑義が生じなければ、試験電圧として直流を用いてもよい。 	<table><tr><th>Nominal total resistance 公称全抵抗値 (kΩ)</th><th>Attenuation 最大減衰量 (dB or more)</th></tr><tr><td>5 ≤ R_a ≤ 10</td><td>70</td></tr><tr><td>10 < R_a ≤ 50</td><td>80</td></tr><tr><td>50 < R_a ≤ 100</td><td>90</td></tr><tr><td>100 < R_a ≤ 500</td><td>100</td></tr></table>	Nominal total resistance 公称全抵抗値 (kΩ)	Attenuation 最大減衰量 (dB or more)	5 ≤ R _a ≤ 10	70	10 < R _a ≤ 50	80	50 < R _a ≤ 100	90	100 < R _a ≤ 500	100
			Nominal total resistance 公称全抵抗値 (kΩ)	Attenuation 最大減衰量 (dB or more)									
			5 ≤ R _a ≤ 10	70									
			10 < R _a ≤ 50	80									
			50 < R _a ≤ 100	90									
100 < R _a ≤ 500	100												
Insertion loss 挿入損失 within 0.1 dB以内													
3.6	Noise しゅう動雑音	DC 20V, when the rated voltage is 20V or less, its rated voltage shall be applied to the terminals between 1 and 3. And then the noise shall be measured by the specified speed. For other procedures, refer to IEC Pub. 393-1-6, Test Method B. Traveling speed: 20mm/sec 端子1-3間に直流電圧20V (定格が20V以下の時は、その電圧)を加え、レバーを20mm/秒の速さで移動させ、このときに発生する雑音電圧を測定する。その他 JIS C 5261A 法による。	<table><tr><th>Nominal total resistance 公称全抵抗値 (kΩ)</th><th>(mVP-P) 未調</th></tr><tr><td>5 ≤ R_a ≤ 50</td><td>47</td></tr><tr><td>50 < R_a ≤ 500</td><td>85</td></tr></table>	Nominal total resistance 公称全抵抗値 (kΩ)	(mVP-P) 未調	5 ≤ R _a ≤ 50	47	50 < R _a ≤ 500	85				
			Nominal total resistance 公称全抵抗値 (kΩ)	(mVP-P) 未調									
			5 ≤ R _a ≤ 50	47									
50 < R _a ≤ 500	85												
3.7	Insulation resistance 絶縁抵抗	A voltage of 250V DC shall be applied for 1 min., after which measurement shall be made. D.C. 250Vの電圧を印加して測定。(1分間)	Between individual terminals and frame/lever Between adjacent terminals 端子-レバー間 端子-枠間 独立した抵抗素子の端子間										
			100MΩ or more 以上										
3.8	Dielectric strength 耐電圧	Trip current: 2mA Measuring frequency: 50/60Hz 250V AC for 1 min. A.C. 250V_{r.m.s.} 1分間。 感度電流 2mA (周波数50/60Hz)	Between individual terminals and frame/lever Between adjacent terminals Without damage to parts, arcing or breakdown etc. 損傷、アークおよび絶縁破壊を生じないこと。										
3.9	Tracking error 相互偏差	The voltage of 2 V_{r.m.s.} to 15 V_{r.m.s.} shall be applied between terminals 1 and 3 and between terminals 1 to 3 by measuring frequency at 1 kHz. The output voltage shall be measured between terminals 1 and 2 and between terminals 2 and 3 (for the C and RD taper, the measurement shall be made between terminals 2 and 3 and between terminals 2 and 3) units the first of these shall be the standard one. If there is not any doubt about the results, DC voltage shall be used as the test voltage. 端子1-3間、端子1'-3'間にそれぞれ1kHzで2-15V (正弦波実効値)の電圧を加え、両段を基準として端子1-2間、端子1'-2'間(3端子基準の場合は、端子2-3間、端子2'-3'間)の出力電圧を測定する。なお、判定に疑義が生じなければ、試験電圧として直流を用いてもよい。 	<table><tr><td>At 50% of lever travel 移動距離の50%の位置</td><td>± dB</td></tr><tr><td>40dB-0dB</td><td>± 3 dB</td></tr><tr><td>dB-dB</td><td>± dB</td></tr><tr><td>dB-dB</td><td>± dB</td></tr></table>	At 50% of lever travel 移動距離の50%の位置	± dB	40dB-0dB	± 3 dB	dB-dB	± dB	dB-dB	± dB		
			At 50% of lever travel 移動距離の50%の位置	± dB									
40dB-0dB	± 3 dB												
dB-dB	± dB												
dB-dB	± dB												

					ALPS ELECTRIC CO., LTD.				
					APPD.	CHKD.	DSGD.	TITLE	
					Sep. 11 '91	Sep. 11 '91	Sep. 9 '91	SPECIFICATIONS	
								DOCUMENT NO.	
								4SA02R-003 (2)	
SYNR.	DATE	APPD.	CHKD.	DSGD.					

MASTER TYPE POTENTIOMETER(SLIDE)

4. Mechanical characteristics 機械的特性

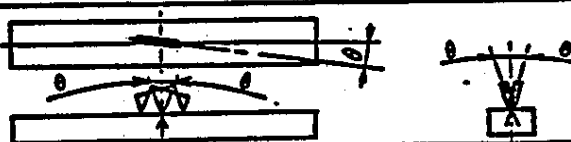Item 項目	Conditions 条件	Specifications 規格
4.1 Lever travel. レバー - 移動距離		100±1mm
4.2 Operating force 作動力	Traveling speed: 20mm/sec Operating position: Tip of the lever 移動速度は20mm/秒とする。 操作位置はレバー先端部とする。	80gf±50gf
Starting force 始動力	Traveling speed: 20mm/sec Operating position: Tip of the lever 移動速度は20mm/秒とする。 操作位置はレバー先端部とする。	Operating force +100gf max. 作動力+100gf以下
4.3 Lever travel stop strength レバーの移動 止強度	A static load of 10Kgf shall be applied at the point 5mm from top surface of the case for both ends in the direction of lever travel for 10sec. レバーの移動方向において、枠上面より5mmの位置に10Kgfの静荷重を10秒間加える。	Without excessive play or poor contact 著しいガタ、および接触不良を生じないこと。
4.4 Side thrust of the lever レバーの横押し強度	A static load of 2Kgf shall be applied at the point 5mm from top surface of the case in a direction perpendicular to the axial direction for 10sec. with the potentiometer mounted in assembly conditions. 本体をシャーシに固定し、枠上面より5mmの位置にレバー移動方向に対して直角方向に2Kgfの静荷重を10秒間加える。	Without deformation or breaks in the sliding part and contact part. 操作部および関連部品に変形、破損がないこと。
4.5 Thrust and tensile lever レバーの押し引き強度	Thrust and tensile static load of 5 kgf shall be applied to the potentiometer in the lever direction for 10 sec. レバーの押し方向および引っ張り方向に5kgfの静荷重を10秒間加える。	Without damage such as bed sliding and braking or play in the lever. Electrical characteristics shall be satisfied. レバーのガタ、および破損、しゅう動ムラ等がなく、電気的性能を満足すること。
4.6 Displacement of lever レバーの横揺れ	A torsion moment of 250gf·cm shall be applied at the lever in a direction perpendicular to the axial direction and then the displacement shall be measured. レバーに250gf·cmの曲げモーメントを移動方向に対して直角に加えレバー先端で測定する。	or less 2(2xL/25)mm以下 L=Length of lever レバー長さ
4.7 Lever inclination and torsion レバーの傾きおよびねじれ		θ shall be 2° or less. Return to the same position after torsion. θは2度以下。また、ひねりを加えた時、元に戻ることを要する。
4.8 Distance from the center of the lever レバーのセンターズレ	After sliding lever as far as it will go in each direction, the distance from the center of the lever to the middle of the mounting screw hole shall be measured at the both ends. 取付けネジ穴中心に対するレバーのセンターからのずれを片側ごとに測定する。 	0.5mm or less on each end. 片側0.5mm以下。
4.9 Resistance to soldering heat はんだ耐熱	Bit temperature: 350°C or less Application time of soldering iron: 5 sec or less 温度350°C以下。時間5秒以内。 ただし、端子に異常加圧のないこと。	Change in total resistance is relative to the value before test: 5% Without excessive looseness of terminals and failure contact. 全抵抗値の変化は初期値の±5%以内。 著しいガタ、接触不良を生じない。

					 ALPS ELECTRIC CO., LTD.		
					APPD.	CHKD.	DSGD.
					<i>Sep. 12 '91</i>	<i>Sep. 11 '91</i>	<i>Sep. 9 '91</i>
					TITLE		
					SPECIFICATIONS		
					DOCUMENT NO.		
					4SA02R-003 (3/6)		
SYMB.	DATE	APPD.	CHKD.	DSGD.	<i>y. yoshino</i>	<i>S. Ahe</i>	<i>K. Harisawa</i>

CLASS.NO.	TITLE
	MASTER TYPE POTENTIOMETER(SLIDE)

5. Endurance 耐久性能

Item 項目	Conditions 条件	Specifications 規格															
5.1 Endurance without load 無負荷しゅう 動寿命	The moving contact, without electrical load, shall be slid from one end stop to the other and returned to its original position extended over 90% or more effective distance. This procedure constitutes 1 cycle. And the moving contact shall be subjected to 600 cycles per hour, a total of 30000 $\pm$ 200 cycles (5,000 to 8,000 continuous cycles for 24 hours.) 無負荷にてレバーを 600 サイクル/時の速さで有効移動距離の 90%以上にあたり、1日連続5000-8000サイクル、合計30000 $\pm$ 200サイクル移動させる。	Change in total resistance is relative to the value before test: $\pm$ 15% Noise: Refer to Note 1) Operating force: 10-200gf Clause (3), (4) shall be satisfied. 全抵抗値の変化は初期値の $\pm$ 15%以内しゅう動雑音は注記 1) による。作動力 10-200 gf。その他は、(3項) (4項) を満足すること。															
5.2 Cold 耐寒性	The potentiometer shall be stored at a temperature of $-30 \pm 2^\circ\text{C}$ for 96 hours in a thermostatic chamber. Then the potentiometer shall be taken out of the chamber and its surface moisture shall be removed. And then the potentiometer shall be subjected to standard atmospheric conditions for 1 hour, after which measurement shall be made. $-30 \pm 2^\circ\text{C}$ の恒温槽中にて 96 時間放置し、常温常温中に 1 時間放置後 1 時間以内に測定する。 ただし水滴は、取り除くものとする。	Change in total resistance is relative to the value before test: $\pm$ 20% Clause (3), (4) shall be satisfied. 全抵抗値の変化は初期値の $\pm$ 20%以内その他は、(3項) (4項) を満足すること。															
5.3 Dry heat 耐熱性	The potentiometer shall be stored at a temperature of $70 \pm 2^\circ\text{C}$ for 240 $\pm$ 8 hours in a thermostatic chamber. Then the potentiometer shall be maintained at standard atmospheric conditions for 1 hour, after which measurements shall be made. $70 \pm 2^\circ\text{C}$ の恒温槽中にて 240 $\pm$ 8 時間放置し、常温常温中に 1 時間放置後 1 時間以内に測定する。	Change in total resistance is relative to the value before test: $\pm$ 5% Noise: Refer to Note 1) Operating force: 10-200gf Clause (3), (4) shall be satisfied. 全抵抗値の変化は初期値の $\pm$ 5%以内しゅう動雑音は注記 1) による。作動力 10-200 gf。その他は、(3項) (4項) を満足すること。															
5.4 Damp heat 耐湿性	The potentiometer shall be stored at a temperature of $40 \pm 2^\circ\text{C}$ with relative humidity of 90% to 95% for 96 $\pm$ 4 hours in a thermostatic chamber. And its surface moisture shall be removed. And then the potentiometer shall be subjected to standard atmospheric conditions for 1 hour, after which measurement shall be made. $40 \pm 2^\circ\text{C}$ 相対湿度 90-95% の恒温恒湿槽中にて 96 $\pm$ 4 時間放置し、常温常温中に 1 時間放置後 1 時間以内に測定する。 ただし水滴は、取り除くものとする。	Change in total resistance is relative to the value before test: $\pm$ 35% Noise: Refer to Note 1) Operating force: 10-200gf Clause (3), (4) shall be satisfied. 全抵抗値の変化は初期値の $\pm$ 35-5%以内しゅう動雑音は注記 1) による。作動力 10-200 gf。その他は、(3項) (4項) を満足すること。															
5.5 Change of temperature 温度サイクル	The potentiometer shall be subjected to 5 successive change of temperature cycles, each as shown in table below. Then its surface moisture shall be removed. And then the potentiometer shall be subjected to standard atmospheric conditions for 1 hour, after which measurements shall be made. 下記条件で 5 サイクル試験後、常温常温中に 1 時間放置後 1 時間以内に測定する。ただし水滴は、取り除くものとする。 <table border="1"> <thead> <tr> <th>Temp. 温度</th><th>Temperature 温度</th><th>Duration 時間</th></tr> </thead> <tbody> <tr> <td>1</td><td>$-10 \pm 3^\circ\text{C}$</td><td>30 Min. 30分</td></tr> <tr> <td>2</td><td>Standard atmospheric conditions 常温</td><td>10-15 Min. 10-15分</td></tr> <tr> <td>3</td><td>$70 \pm 2^\circ\text{C}$</td><td>30 Min. 30分</td></tr> <tr> <td>4</td><td>Standard atmospheric conditions 常温</td><td>10-15 Min. 10-15分</td></tr> </tbody> </table>	Temp. 温度	Temperature 温度	Duration 時間	1	$-10 \pm 3^\circ\text{C}$	30 Min. 30分	2	Standard atmospheric conditions 常温	10-15 Min. 10-15分	3	$70 \pm 2^\circ\text{C}$	30 Min. 30分	4	Standard atmospheric conditions 常温	10-15 Min. 10-15分	Change in total resistance is relative to the value before test: $\pm$ 20% Noise: Refer to Note 1) Operating force: 10-200gf Clause (3), (4) shall be satisfied. 全抵抗値の変化は初期値の $\pm$ 20%以内しゅう動雑音は注記 1) による。作動力 10-200 gf。その他は、(3項) (4項) を満足すること。
Temp. 温度	Temperature 温度	Duration 時間															
1	$-10 \pm 3^\circ\text{C}$	30 Min. 30分															
2	Standard atmospheric conditions 常温	10-15 Min. 10-15分															
3	$70 \pm 2^\circ\text{C}$	30 Min. 30分															
4	Standard atmospheric conditions 常温	10-15 Min. 10-15分															

					ALPS ELECTRIC CO., LTD.	
					APPD.	CHKD.
					DSGD.	TITLE
					SPECIFICATIONS	
					DOCUMENT NO.	
					4SA02R-003 (4/6)	
SYMB.	DATE	APPD.	CHKD.	DSGD.		

CLASS.NO.	TITLE	
	MASTER TYPE POTENTIOMETER (SLIDE)	

Note 1) For noise specification after the test, refer to the list below.

注記 1) 試験後のしゅう動雑音規格は、下表による。


Nominal total resistance 公称全抵抗値 (KΩ) $5 \leq R_a \leq 50$	Nominal total resistance 公称全抵抗値 (KΩ) $50 < R_a \leq 500$
Less than 150mVP-P 未満	Less than 300mVP-P 未満

2) Measurement of the endurance characteristic shall be made after 5 cycles' slide of moving contact


2) 耐久性能後の測定は、レバーを5サイクルしゅう動後とする。

△ 3) Prohibition of patten wiring for oblique line department.

3) 斜線部は、パターン配線を禁止します。

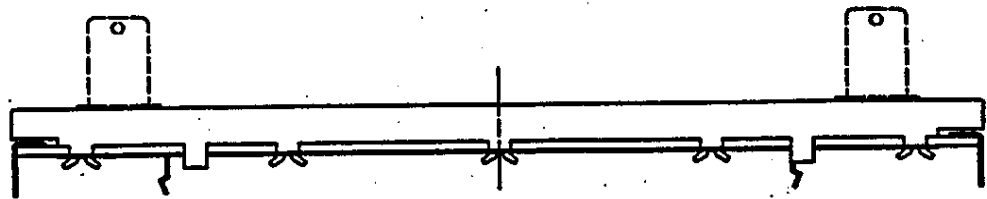







Viewed from mounting side
挿入側より

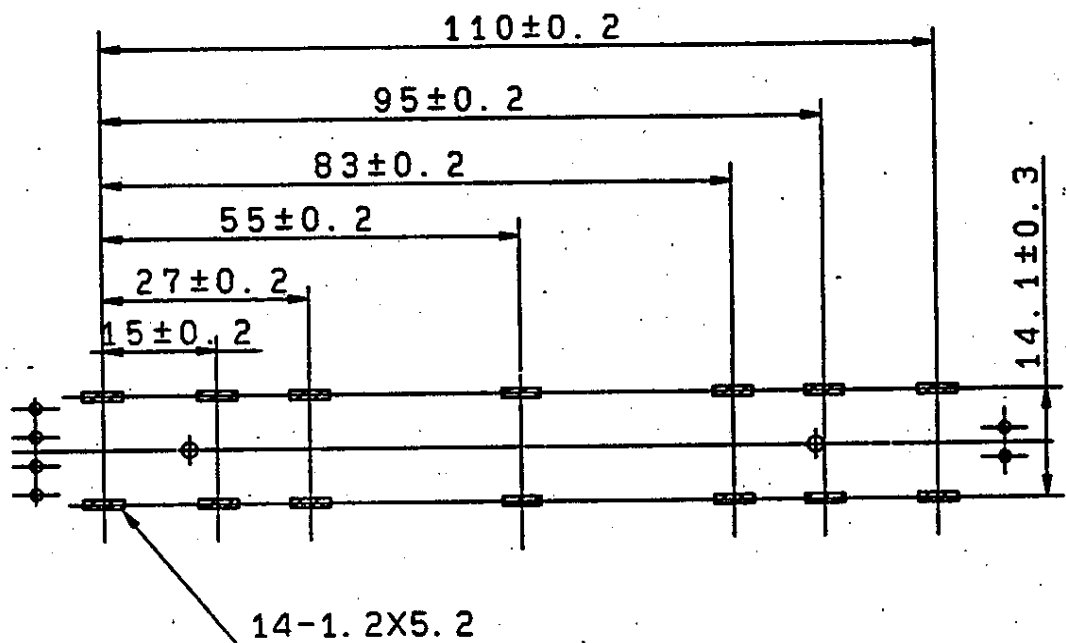

Unit : mm

					ALPS ELECTRIC CO., LTD.	
					APPD.	CHKD.
					Apr. 17 '92	Apr. 17 '92
					TITLE	
					SPECIFICATIONS	
					DOCUMENT NO.	
					4SA02R-003 (5/6)	
△ 1	3/10/92	Y.Y	G.O	M.S		
SYMB.	DATE	APPD.	CHKD.	DSGD.		
				G. Ale		

RESISTANCE LAW (TAPER) 抵抗変化特性規格

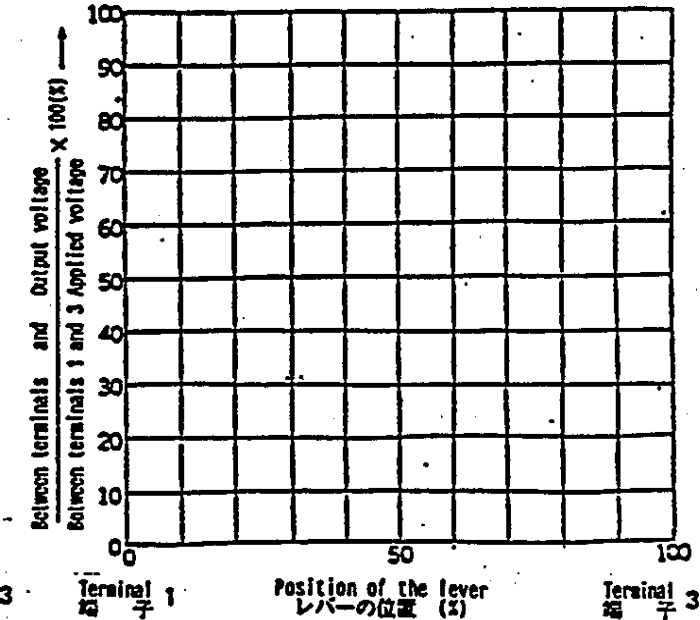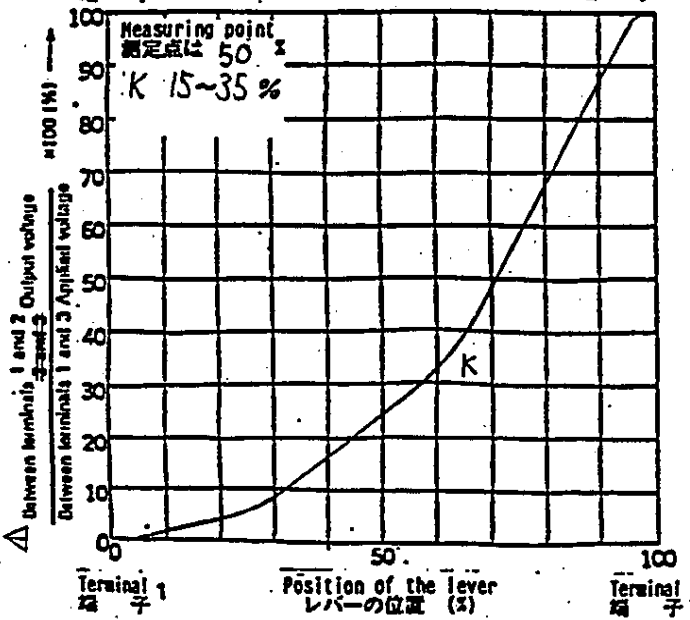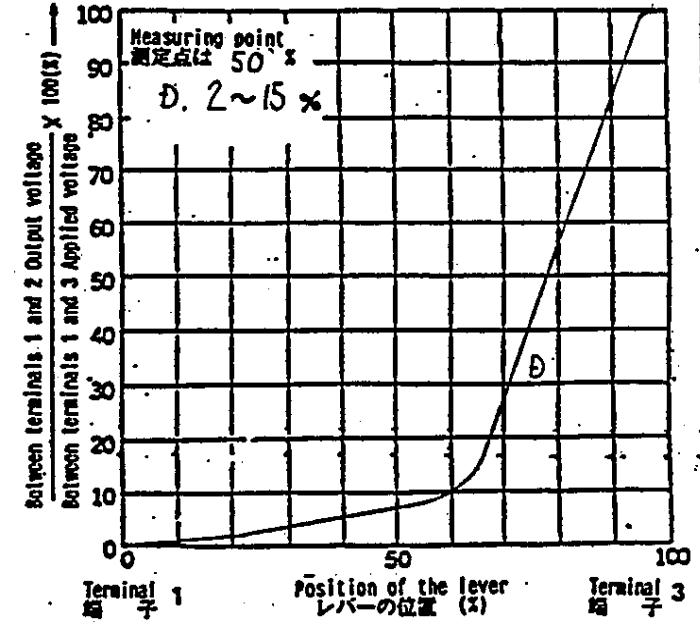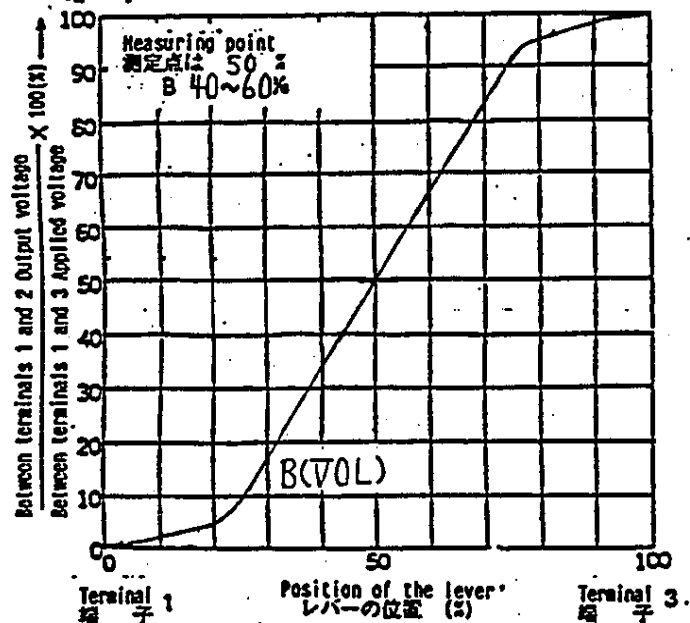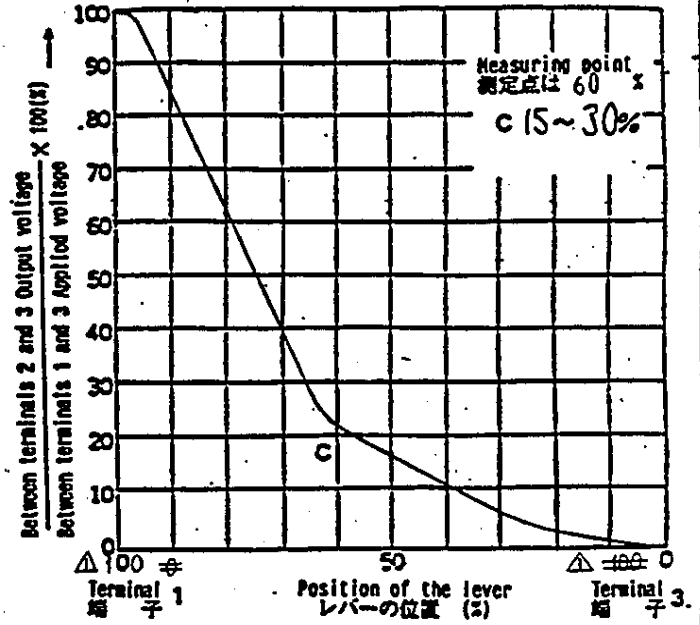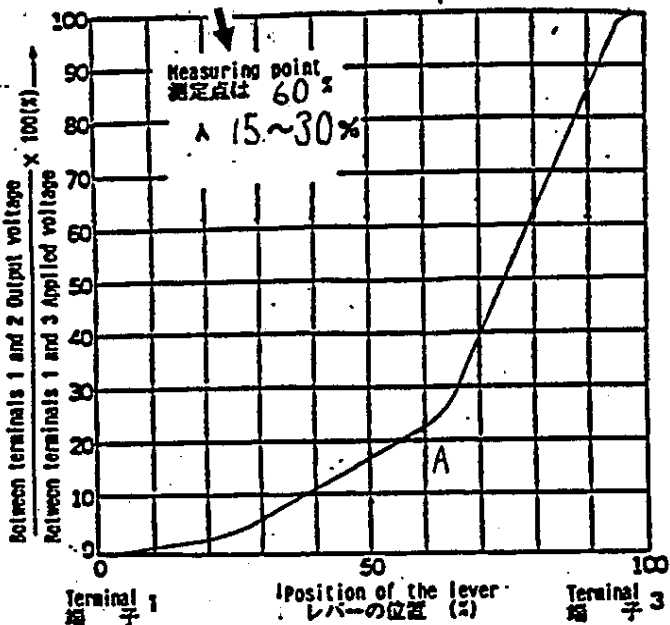

	..				APPD.	CHKD.	DSGD.	TITLE
	..				Sep. 6 '91	Sep. 6 '91	Sep. 6 '91	SPECIFICATIONS
Δ 3	May 89	X.Y			M. Inoue	K. Naitoh	T. Kumagai	DOCUMENT NO.
SYMS	DATE	APPD.	CHKD.	DSGD.				4SA02R-003 (6/6)

ご使用上の注意

PRECAUTION IN USE

1. 偏心ツマミをご使用になる場合

レバーの中心より離れたところを作用点としてご使用になる場合、可能な限り
下図A寸法を短くしてご使用下さい。

If it will be used the operating point away from the center line of the lever, it should be shorter as possible.


2. レバー長さについて

レバー長さについては、ツマミを含めて、下図B面より極力短いものをご使用願います。レバー長さについては、作用点までの距離が短いほどしゅう動感が良好となり、長いほど好ましくない感になります。

About the length of lever

If conditions permit, it is advisable to use the shortest possible lever.

The longer the length up to operating point, the more unfavorable slide feeling will be given.

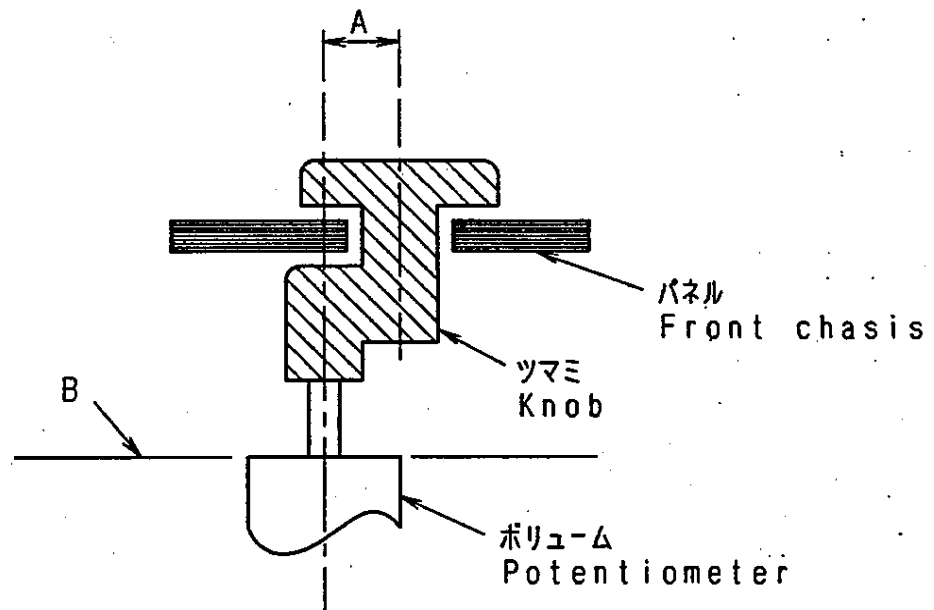

3. レバーの駆動に関しては上記内容を考慮の上、セット実装を行い
あらかじめ異常のないことをご確認願います。

Regarding the operation of the lever, please consider the above mentioned, and make sure nothing is wrong with the operation under installing in your appliance that you plan to use our products actually.

4. ツマミ挿入及びレバー操作は、ボリュームマウント基板に
ソリ(曲がり)のない状態で行って下さい。

Knob assembly on the lever and functioning the lever to be performed under the condition of P. C. B. without warp.

					ALPS ELECTRIC CO., LTD.			
					APPD.	CHKD.	OSGD.	TITLE
					PDI-ENGI '95.7.24 YOSHIOKA	PDI-ENGI '95.7.24 KIMURA	PDI-ENGI '95.7.24 Y.SAITOH	スライド ボリューム 仕様書 SPECIFICATIONS
ORIGINAL	41-17-3	Y-Y	K-N	S-A	DOCUMENT NO.			
SYMB	DATE	APPD	CHKD	OSGD	4S0001-200			

FOLLOW THE NEXT CONDITIONS FOR SOLDERING

1. Solder

63 % Sn solder specified in JIS Z3282.

2. Board in Use

Single-face copper laid laminate board.

Plate thickness (t) = 1.6 mm

3. In the Case of Dip Soldering

(1) State of potentiometer


Position a lever in the vicinity of center.

(2) Specific Gravity of Flux

0.83±0.01 (foaming type)

(3) Height of Flux face

A level of the upper face of flux for reaching the position at a half of the plate thickness of printed board. (Fig.1)
Further, no flow of flux invading on the surface of printed board on the side of installing potentiometer is allowed.

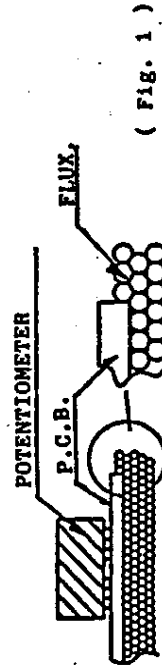

(Fig. 1)

(4) Preheat Condition

100°C MAX., within 1 minute

(Temperature on the side of installing printed board is designated.)

(5) Soldering Condition

Solder temperature: 260°C MAX.

Soldering period : within 5 seconds

Time of soldering : only one time is permitted

4. In the Case of Manual Soldering


Solder temperature : 300°C MAX.

Soldering period : within 3 seconds


Time of soldering : only one time is permitted

5. Matters to Be Noted

- (1) Do not add any stress on terminals in the case of soldering. For instance, forced movement of potentiometer with terminals being heated may probably deteriorate the electric features due to generation of looseness in connection between resistant board and terminals.
- (2) Use caution to soldering process so as to prevent solder from rising up to the surface of printed board on the side of installing potentiometer, because defective contact may take place in terminal connecting part due to soldering heat (Fig. 2)
- (3) In the case of lead wiring, solder it so that a gap of 1 mm or more may be reserved between the potentiometer body and soldering part. (Fig. 3)
- (4) The grade of influence of soldering exerted on the potentiometer depends upon the size of a printed board, installing position of the potentiometer, and the size of a solder bath etc. Therefore, make sure, in advance, of no abnormal state under the conditions of soldering to be carried out at present.

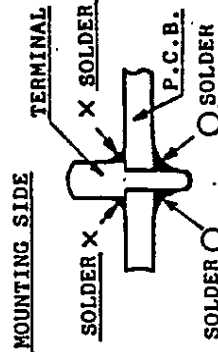

(Fig. 2)

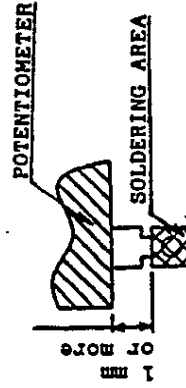

(Fig. 3)

ALPS ELECTRIC CO., LTD.

DSGD.

CHKD.

APPD.

TITLE

SLIDE POTENTIOMETER

DOCUMENT NO

450001 - 202M

