
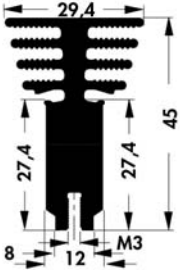
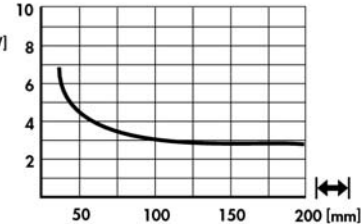


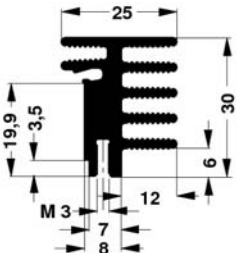
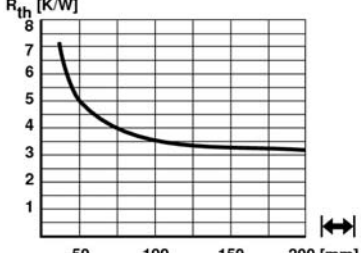


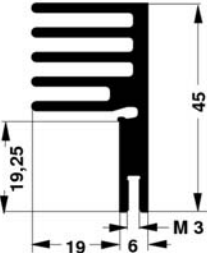
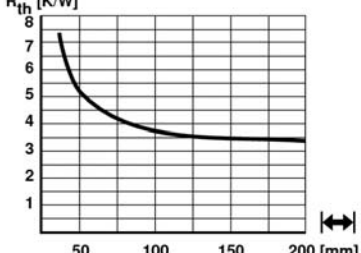


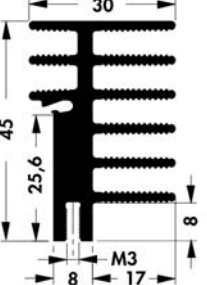
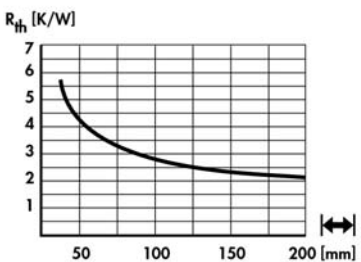



Extruded heatsinks for lock-in retaining spring

art. no. SK 489 ...			
please indicate: ...  25 37.5 50 75 84 100 1000 mm			
art. no. SK 573 ...			
please indicate: ...  25 37.5 50 75 84 100 1000 mm			
art. no. SK 576 ...			
please indicate: ...  25 37.5 50 75 84 100 1000 mm			
art. no. SK 481 ...			
please indicate: ...  25 37.5 50 75 84 100 1000 mm			

please note: profile threads → A 4

A 85

Mounting material for semiconduct. → E 37 – 41
 Insulator caps → E 43
 Mounting pads → E 39
 Lock-in transistor fixing spring → A 116

Heatsinks for PCB → A 88
 Profiles for PCB components → A 90
 Heatsinks with threaded rail → A 91
 Mounting parts for heatsinks → E 42 – 43